# **FERROXCUBE**

# DATA SHEET

# PQ26/25 PQ cores and accessories

Supersedes data of September 2004


2008 Sep 01



#### **CORE SETS**

#### Effective core parameters

SYMBOL	PARAMETER VALUE		UNIT	
Σ(I/A)	core factor (C1) 0.451 m		mm <sup>-1</sup>	
V <sub>e</sub>	effective volume 6530 mm			
l <sub>e</sub>	effective length	54.3	mm	
A <sub>e</sub>	ffective area 120 mm		mm <sup>2</sup>	
A <sub>min</sub>	minimum area	108	mm <sup>2</sup>	
m	mass of set	≈ 36	g	

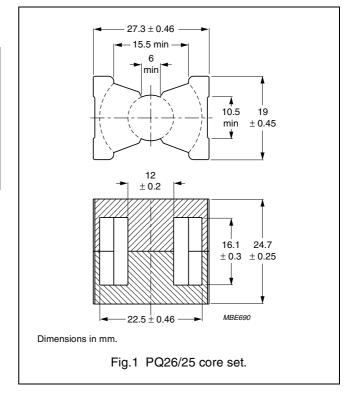

#### Core sets for general purpose transformers and power applications

Clamping force for  $A_L$  measurements, 60  $\pm 15\ N.$ 

GRADE	A <sub>L</sub> (nH)	$\mu_{\mathbf{e}}$	TOTAL AIR GAP (μm)	TYPE NUMBER
3C81	250 ±3%	≈ 90	≈ 730	PQ26/25-3C81-E250
	315 ±3%	≈ 113	≈ 550	PQ26/25-3C81-A315
	400 ±3%	≈ 144	≈ 420	PQ26/25-3C81-A400
	630 ±3%	≈ 227	≈ 240	PQ26/25-3C81-A630
	1000 ±5%	≈ 360	≈ 140	PQ26/25-3C81-A1000
	6010 ±25%	≈ <b>2160</b>	≈ 0	PQ26/25-3C81
3C90	250 ±3%	≈ 90	≈ 730	PQ26/25-3C90-E250
	315 ±3%	≈ 113	≈ 550	PQ26/25-3C90-A315
	400 ±3%	≈ 144	≈ 420	PQ26/25-3C90-A400
	630 ±3%	≈ 227	≈ 240	PQ26/25-3C90-A630
	1000 ±5%	≈ 360	≈ 140	PQ26/25-3C90-A1000
	5250 ±25%	≈ 1890	≈ 0	PQ26/25-3C90
3C91 des	6010 ±25%	≈ <b>2160</b>	≈ 0	PQ26/25-3C91
3C94	5250 ±25%	≈ 1890	≈ 0	PQ26/25-3C94
3C95 des	6010 ±25%	≈ <b>2160</b>	≈ 0	PQ26/25-3C95
3C96 des	4700 ±25%	≈ 1690	≈ 0	PQ26/25-3C96

# PQ cores and accessories

PQ26/25

GRADE	A <sub>L</sub> (nH)	$\mu_{\mathbf{e}}$	TOTAL AIR GAP (μm)	TYPE NUMBER
3F3	250 ±3%	≈ 90	≈ 730	PQ26/25-3F3-E250
	315 ±3%	≈ 113	≈ 550	PQ26/25-3F3-A315
	400 ±3%	≈ 144	≈ 420	PQ26/25-3F3-A400
	630 ±3%	≈ 227	≈ 240	PQ26/25-3F3-A630
	1000 ±5%	≈ 360	≈ 140	PQ26/25-3F3-A1000
	4390 ±25%	≈ 1574	≈ 0	PQ26/25-3F3

#### Properties of core sets under power conditions

	B (mT) at	CORE LOSS (W) at					
GRADE	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B = 200 mT; T = 100 °C	f = 100 kHz; B = 100 mT; T = 100 °C	f = 100 kHz; B = 200 mT; T = 25 °C	f = 100 kHz; B = 200 mT; T = 100 °C	f = 400 kHz; B = 50 mT; T = 100 °C	f = 500 kHz; B = 50 mT; T = 100 °C
3C81	≥320	≤ 1.5	_	_	_	_	_
3C90	≥320	≤ 0.79	≤ 0.83	_	_	_	_
3C91	≥320	_	≤ 0.5 <sup>(1)</sup>	_	≤ 3.2 <sup>(1)</sup>	_	_
3C94	≥320	_	≤ 0.62	_	≤ 4.0	_	_
3C95	≥320	_	ı	≤ 3.85	≤ 3.66	_	_
3C96	≥340	_	≤ 0.5	_	≤ 3.2	≤ 1.15	≤ 2.5
3F3	≥320	_	≤ 0.72	_	_	≤ 1.2	_


#### Note

1. Measured at 60 °C.

#### **COIL FORMER**

#### General data 12-pins PQ26/25 coil former

PARAMETER	SPECIFICATION
Coil former material	Polyethylene terephtalate (PET), glass-reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41938
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	180 °C, "IEC 60085", class H
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1

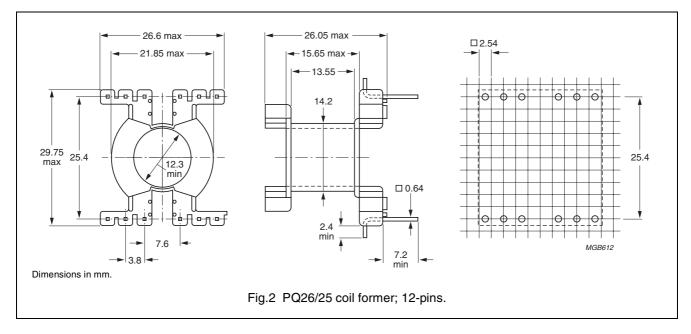

#### Winding data and area product for 12-pins PQ26/25 coil former

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm²)	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm <sup>4</sup> )	TYPE NUMBER
1	47.5	13.6	56.4	5700	CPV-PQ26/25-1S-12P-Z
1	47.5	13.6	56.4	5700	CPV-PQ26/25-1S-12PD-Z


# PQ cores and accessories

PQ26/25

#### **MOUNTING PARTS**

#### General data

ITEM	REMARKS	TYPE NUMBER
Clamp	phosphorbronze, Sn plated, earth pins solderability acc. to "IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s	CLM/P-PQ26/25

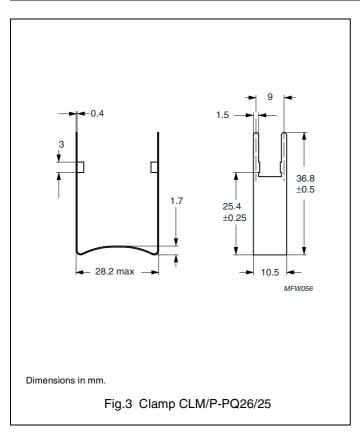

### PQ cores and accessories

PQ26/25

#### **DATA SHEET STATUS DEFINITIONS**

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

#### **DISCLAIMER**

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

#### **PRODUCT STATUS DEFINITIONS**

STATUS	INDICATION	DEFINITION
Prototype	prot	These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in	des	These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support	sup	These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.