

# FU-627SLD-F1M51/F1M52

1.55  $\mu$ m LD MODULE WITH SINGLEMODE FIBER PIGTAIL

## DESCRIPTION

Module type FU-627SLD-F1M5X has been developed for coupling a singlemode optical fiber and a 1.55  $\mu$ m wavelength InGaAsP LD (Laser diode).

FU-627SLD-F1M5X is suitable to light source for measuring instruments.(especially, OTDR)

## FEATURES

- High optical output power
- Emission wavelength is in 1.55  $\mu$ m band

## APPLICATION

OTDR


## ABSOLUTE MAXIMUM RATINGS (Tc = 25 $^{\circ}$ C)

| Parameter                  | Symbol          | Conditions | Rating         | Unit         |
|----------------------------|-----------------|------------|----------------|--------------|
| Laser diode                | Reverse voltage | VRL        | —              | V            |
|                            | Forward current | IFL        | Pulse (Note 1) | 280 mA       |
| Photodiode for monitoring  | Reverse voltage | VRD        | —              | V            |
|                            | Forward current | IFD        | —              | 2 mA         |
| Operating case temperature | Tc              | —          | 0 ~ + 60       | $^{\circ}$ C |
| Storage temperature        | Tstg            | —          | - 40 ~ + 70    | $^{\circ}$ C |

Note 1. Pulse condition : Pulse width  $\leq$  10  $\mu$ s, Duty ratio  $\leq$  1 %

## OUTLINE DIAGRAM

(Unit : mm)

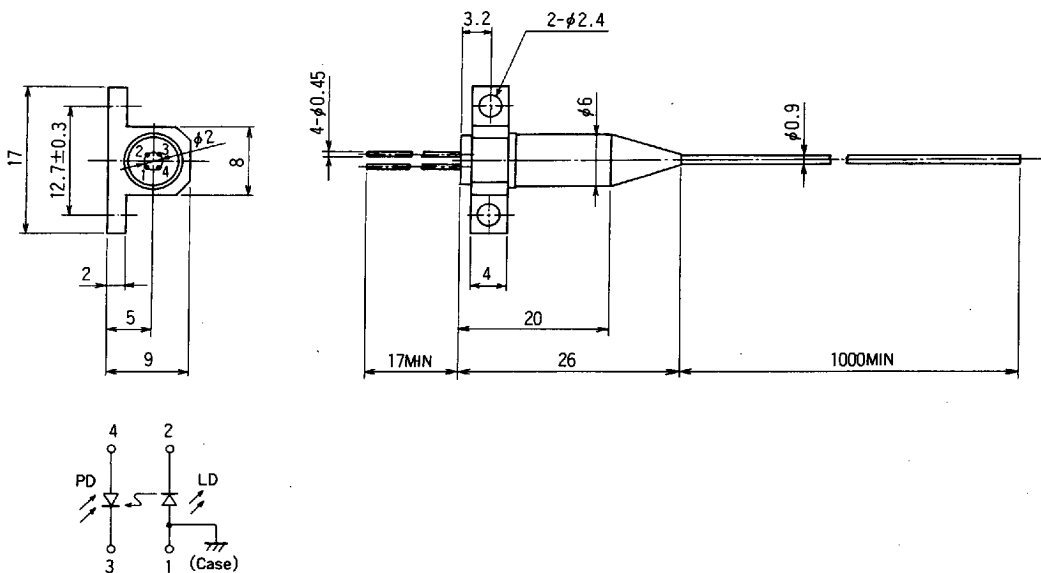

FU-627SLD-F1M51/F1M52

## FU-627SLD-F1M51/F1M52

## 1.55 μm LD MODULE WITH SINGLEMODE FIBER PIGTAIL

## CW CHARACTERISTICS

| Parameter                        | Symbol                          | Test conditions                                                                        | Limits          |      |      |                 |      |      | Unit |
|----------------------------------|---------------------------------|----------------------------------------------------------------------------------------|-----------------|------|------|-----------------|------|------|------|
|                                  |                                 |                                                                                        | FU-627SLD-F1M51 |      |      | FU-627SLD-F1M52 |      |      |      |
|                                  |                                 |                                                                                        | Min.            | Typ. | Max. | Min.            | Typ. | Max. |      |
| Threshold current                | I <sub>th</sub>                 | CW, T <sub>c</sub> = 25 °C                                                             | —               | 10   | 30   | —               | 10   | 30   | mA   |
| Operating current                | I <sub>OP</sub>                 | CW, APC, P <sub>r</sub> = 1.5mW, T <sub>c</sub> = 25 °C                                | —               | 30   | 60   | —               | 30   | 60   | mA   |
| Operating voltage                | V <sub>OP</sub>                 | CW, APC, P <sub>r</sub> = 1.5mW, T <sub>c</sub> = 25 °C                                | —               | 1.2  | 1.7  | —               | 1.2  | 1.7  | V    |
| Central wavelength (Note 3)      | λ <sub>c</sub>                  | CW, APC, P <sub>r</sub> = 1.5mW, T <sub>c</sub> = 25 °C                                | 1525            | 1540 | 1555 | 1515            | 1540 | 1565 | nm   |
| Spectral width (RMS)<br>(Note 3) | Δ λ                             | CW, APC, P <sub>r</sub> = 1.5mW, T <sub>c</sub> = 25 °C                                | —               | 2    | 4    | —               | 2    | 4    | nm   |
| Rise and fall times              | t <sub>r</sub> , t <sub>f</sub> | I <sub>b</sub> = I <sub>th</sub> , 10~90 %<br>T <sub>c</sub> = 25 °C<br>(Note 2)       | —               | 0.5  | 1    | —               | 0.5  | 1    | ns   |
| Tracking error (Note 4)          | E <sub>r</sub>                  | CW, APC, I <sub>mon</sub> (P <sub>r</sub> (25 °C) = 1.5mW)<br>T <sub>c</sub> = 0~60 °C | —               | 0.4  | 1.0  | —               | 0.4  | 1.0  | dB   |
| Monitor current                  | I <sub>mon</sub>                | CW, P <sub>r</sub> = 1.5mW, V <sub>RD</sub> = 5V<br>T <sub>c</sub> = 25 °C             | 0.1             | 0.6  | 1.5  | 0.1             | 0.6  | 1.5  | mA   |
| Dark current (Photodiode)        | I <sub>D</sub>                  | V <sub>RD</sub> = 5V<br>T <sub>c</sub> = 25 °C                                         | —               | 0.1  | 1    | —               | 0.1  | 1    | μA   |

Note 2.  $I_b$ : Bias current (LD)

$$3. \lambda_c = (\sum (a_i * \lambda_i)) / (\sum a_i)$$

$$\sigma = (1 / \sum a_i) * (\sum (a_i * \lambda_i - \lambda_c)^2)^{1/2}$$

where  $a_i \geq a_p \times 0.01$ 
 $a_i$ : Relative intensity of laser spectral emission modes

 $a_p$ : Peak of laser spectral emission modes

$$4. E_r = \text{MAX} | 10 * \log(P_f(T_c) / P_f(25^\circ\text{C})) |$$

## PULSE CHARACTERISTICS

| Parameter                           | Symbol                          | Test conditions<br>(Note 5, 6)                                              | Limits          |      |      |                 |      |      | Unit |
|-------------------------------------|---------------------------------|-----------------------------------------------------------------------------|-----------------|------|------|-----------------|------|------|------|
|                                     |                                 |                                                                             | FU-627SLD-F1M51 |      |      | FU-627SLD-F1M52 |      |      |      |
|                                     |                                 |                                                                             | Min.            | Typ. | Max. | Min.            | Typ. | Max. |      |
| Threshold current                   | I <sub>th</sub>                 | Pulse, T <sub>c</sub> = 25℃                                                 | —               | 10   | 30   | —               | 10   | 30   | mA   |
| Operating current                   | I <sub>OPP</sub>                | Pulse, T <sub>c</sub> = 25℃                                                 | —               | 200  | 250  | —               | 200  | 250  | mA   |
| Operating voltage                   | V <sub>OPP</sub>                | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 25℃               | —               | —    | 3.5  | —               | —    | 3.5  | V    |
| Optical output power from fiber end | P <sub>FP</sub>                 | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 25℃               | 15              | —    | —    | 15              | —    | —    | mW   |
|                                     |                                 | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 60℃               | 7.5             | —    | —    | 7.5             | —    | —    |      |
| Central wavelength<br>(Note 8)      | λ <sub>CP</sub>                 | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 25℃               | 1540            | 1550 | 1560 | 1530            | 1550 | 1570 | nm   |
| Spectral width (RMS)<br>(Note 8)    | Δλ <sub>P</sub>                 | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 25℃               | —               | —    | 10   | —               | —    | 10   | nm   |
| Pulse droop (Note 9)                | ΔP <sub>FP</sub>                | Pulse, I <sub>F</sub> = I <sub>OPP</sub> T <sub>c</sub> = 25℃               | —               | —    | 20   | —               | —    | 20   | %    |
| Rise and fall time                  | t <sub>r</sub> , t <sub>f</sub> | I <sub>B</sub> = I <sub>th</sub> , 10~90 % T <sub>c</sub> = 25℃<br>(Note 7) | —               | 0.5  | 2    | —               | 0.5  | 2    | ns   |

Note 5. Pulse condition: Pulse width  $\leq 10\mu\text{s}$ , Duty ratio  $\leq 1\%$ 

6.  $I_f$ : Forward current (LD)

7.  $I_b$ : Bias current (LD)

$$8. \lambda_{CP} = (\sum (a_i * \lambda_i)) / (\sum a_i)$$

$$\Delta\lambda_P = (1 / \sum a_i) * (\sum (a_i * (\lambda_i - \lambda_c)^2))^{1/2}$$

where  $a_i \geq a_p \times 0.01$ 
 $a_i$ : Relative intensity of laser spectral emission modes

 $a_p$ : Peak of laser spectral emission modes

$$9. \Delta P_{FP} = (P_{F1} - P_{F2}) / P_{F1} * 100$$




Fig.1

# FU-627SLD-F1M51/F1M52

1.55  $\mu$ m LD MODULE WITH SINGLEMODE FIBER PIGTAIL

## OPTICAL-FIBER SPECIFICATIONS

| Parameter       | Limits      | Unit    |
|-----------------|-------------|---------|
| Type            | SM          | —       |
| Mode field dia. | $10 \pm 1$  | $\mu$ m |
| Cladding dia.   | $125 \pm 2$ | $\mu$ m |
| Jacket dia.     | 0.9 typ.    | mm      |

## TYPICAL CHARACTERISTICS

