

## Photocoupler

KODENSHI

## PC-16T1

The Photocoupler consists of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Phototransistor per a channel.

The PC-16T1 has one channel in a 4-pin package.

### FEATURES


- Small Package Size
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : Min.50% (at  $I_F=1\text{mA}$ ,  $V_{CE}=5\text{V}$ )
- Electrical Isolation Voltage : AC2500V<sub>rms</sub>
- Creepage/Clearance between Input and Output : Min. 7.0mm
- UL Recognized File No. E107486

### APPLICATIONS

- Interface between two circuits of different potential
- Vending Machine, Cordless Phone, Key Phone, Fax, Motor Control
- Programmable Logic Control
- Power Supply
- Computer Terminals

### DIMENSION

(Unit : mm)

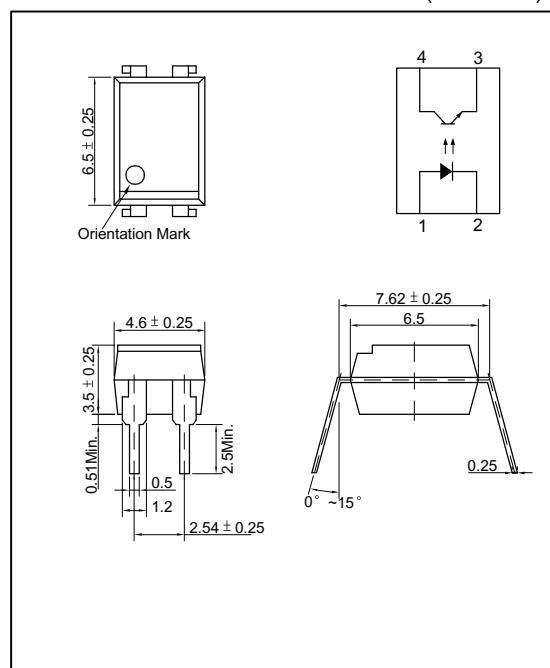

### MAXIMUM RATINGS

( $T_a=25^\circ\text{C}$  )

Parameter	Symbol	Rating	Unit
Input	$I_F$	50	mA
	$V_R$	5	V
	$I_{FP}$	1	A
	$P_D$	70	mW
Output	$BV_{CEO}$	35	V
	$BV_{ECO}$	6	V
	$I_C$	50	mA
	$P_C$	150	mW
Input to Output Isolation Voltage <sup>*2</sup>	$V_{iso}$	AC2500	V <sub>rms</sub>
Storage Temperature	$T_{stg}$	-55~+125	°C
Operating Temperature	$T_{opr}$	-30~+100	°C
Lead Soldering Temperature <sup>*3</sup>	$T_{sol}$	260	°C
Total Power Dissipation	$P_{tot}$	200	mW

\*1. Input current with 100μs pulse width, 1% duty cycle

\*2. Measured at RH=40~60% for 1min

\*3. 1/16 inch form case for 10sec

**PC-16T1****ELECTRO-OPTICAL CHARACTERISTICS**

(Ta=25°C , unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10mA	-	1.15	1.30	V
	Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
	Capacitance	C <sub>T</sub>	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	I <sub>C</sub> =0.5mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	I <sub>E</sub> =0.1mA	6	-	-	V
	Collector Dark Current	I <sub>CEO</sub>	I <sub>F</sub> =0, V <sub>CE</sub> =24V	-	-	100	nA
	Capacitance	C <sub>CE</sub>	V <sub>CE</sub> =0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio <sup>4</sup>	CTR	I <sub>F</sub> =1mA, V <sub>CE</sub> =5V	50	-	600	%
	Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>F</sub> =5mA, I <sub>C</sub> =1mA	-	0.15	0.4	V
	Input-Output Capacitance	C <sub>IO</sub>	V=0, f=1MHz	-	1	-	pF
	Input-Output Isolation Resistance	R <sub>IO</sub>	RH=40~60%, V=500V	-	10 <sup>11</sup>	-	Ω
	Rise Time	tr	V <sub>CE</sub> =5V, R <sub>L</sub> =100Ω	-	4	-	μs
	Fall Time	tf		-	4	-	μs

\*4. CTR=(I<sub>C</sub>/I<sub>F</sub>) X 100 (%)

# Photocoupler

**KODENSHI**

## PC-16T1

