


**Features**

- High Surge Current Capability
- Low Leakage and Forward Voltage Drop

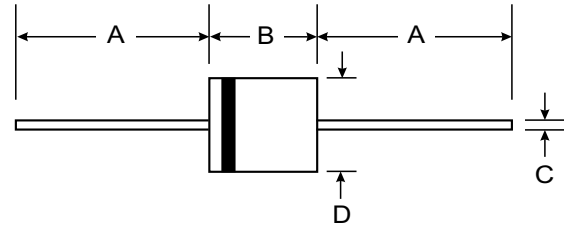

**Mechanical Data**


- Case: R-6, Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-202, Method 208
- Polarity: Color Band Indicates Cathode
- Approx. Weight: 2.1 grams
- Plastic Material - UL Flammability Classification 94V-0

R-6		
Dim	Min	Max
A	25.40	—
B	8.60	9.10
C	1.20	1.30
D	8.60	9.10
All Dimensions in mm		


**Maximum Ratings and Electrical Characteristics @25°C unless otherwise specified**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, halfwave, 60Hz, resistive or inductive load.

Characteristic	Symbol	6A05	6A1	6A2	6A4	6A6	6A8	6A10	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 9.5mm lead length @ $T_A = 75^\circ\text{C}$ (See Fig. 1)	$I_{(AV)}$	6.0							A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	400							A
Maximum Instantaneous Forward Current at 6.0A DC	$V_F$	0.90							V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated Blocking Voltage @ $T_A = 100^\circ\text{C}$	$I_R$	10 100							$\mu\text{A}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +175							$^\circ\text{C}$

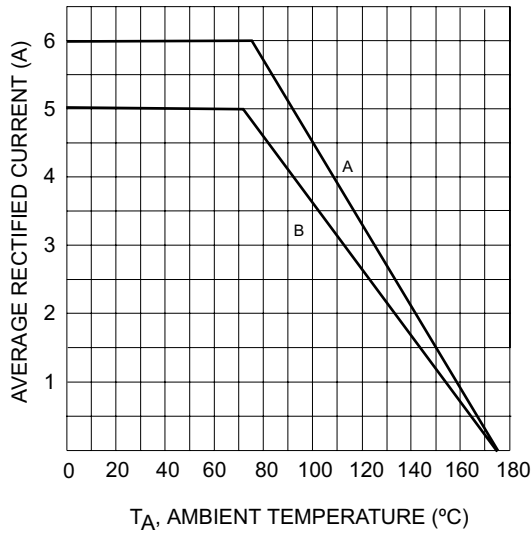

Output Current Derating Curve

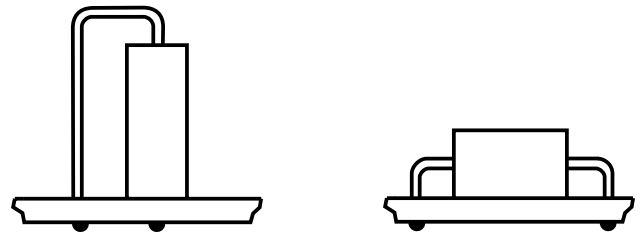


Recommended Method  
(See Derating "A")


Standard Method  
(See Derating "B")

Ground Plane: 25mm<sup>2</sup> equivalent copper surface area


Printed Circuit Board Mounting Method

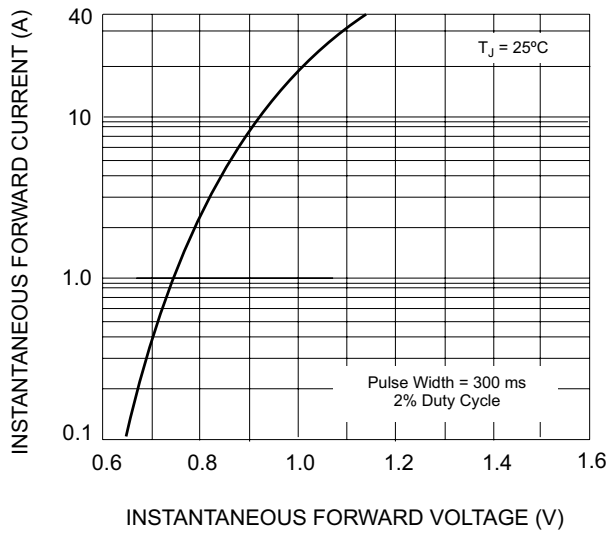

Typical Forward Characteristics

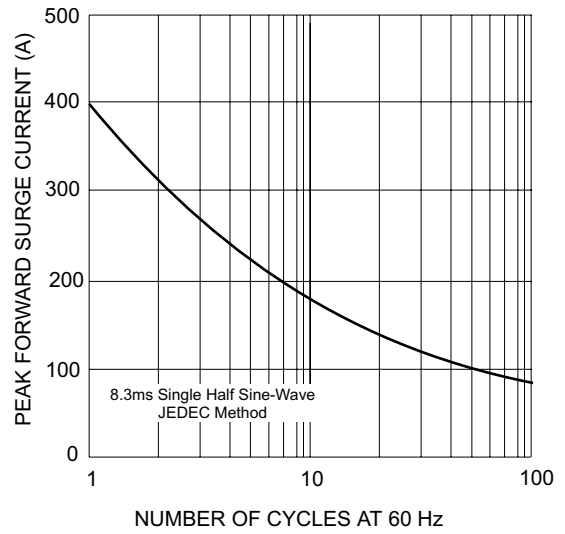

Maximum Non-Repetitive Peak Forward Surge Current

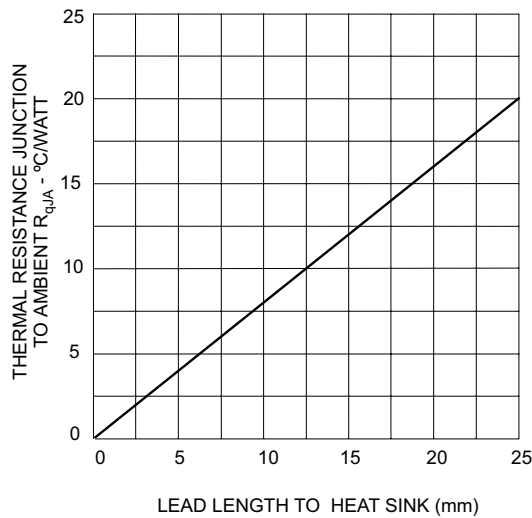

Typical Thermal Resistance  
(Using Standard Mounting Method "B")