



MwT-0820S-4N1/0820Z-4N1


8.0-20.0 GHz

BALANCED AMPLIFIER MODULE



MICROWAVE TECHNOLOGY

4268 Solar Way Fremont, CA 94538 510-651-6700 FAX 510-651-2208

TYPICAL SPECIFICATIONS @ 25°C



- 6.0 dB SMALL SIGNAL GAIN
- 5.5 dB NOISE FIGURE
- 14.0 dBm P-1dB
- 15.0 dB RETURN LOSS
- 40 mA @ +8V
- USES TWO MwT-4 GaAs FET DEVICES

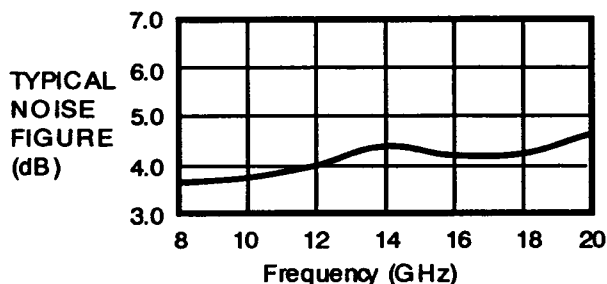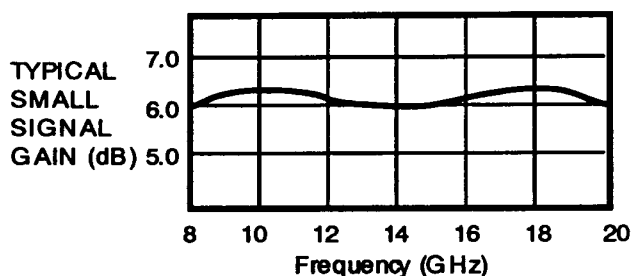


ELECTRICAL SPECIFICATIONS (Ta=25°C)

SYMBOL	PARAMETERS	UNITS	MIN	TYP	MAX
FREQ	Frequency Range	GHz	8.0		20.0
SSG	Small Signal Gain	dB	5.5	6.0	
$\Delta G/\Delta F$	SSG Flatness	$\pm$ dB		0.4	0.6
$\Delta G/\Delta T$	SSG Variation over Temperature	dB/°C		-0.012	
P-1dB	Output Power at 1 dB Compression	dBm	12.0	14.0	
PSAT	Output Power at 6 dB Compression	dBm		16.0	
$\Delta P-1/\Delta T$	P-1dB Variation over Temperature	dB/°C		-0.008	
IP3	Third Order Intercept Point	dBm		25.0	
2nd HAR	2nd Harmonic at Pout = 14.0 dBm	dBc		-21.0	
2nd HAR	2nd Harmonic at Pout = 16.0 dBm	dBc		-16.0	
NF	Noise Figure	dB		4.5	5.5
VSWR,IN	Input VSWR	-		1.5:1	1.7:1
VSWR,OUT	Output VSWR	-		1.5:1	1.7:1
ISO	Reverse Isolation	dB		-20.0	
VDD	Power Supply Voltage	+V	7.9	8.0	8.1
IDD	Small Signal Module Current	mA		40.0	60.0
RTH	Thermal Resistance Including FET*	°C/W		216.0	

* When calculating Tch, use FET Vds = 4.0 volts and FET Ids = 20 mA.

MODULE OUTLINES

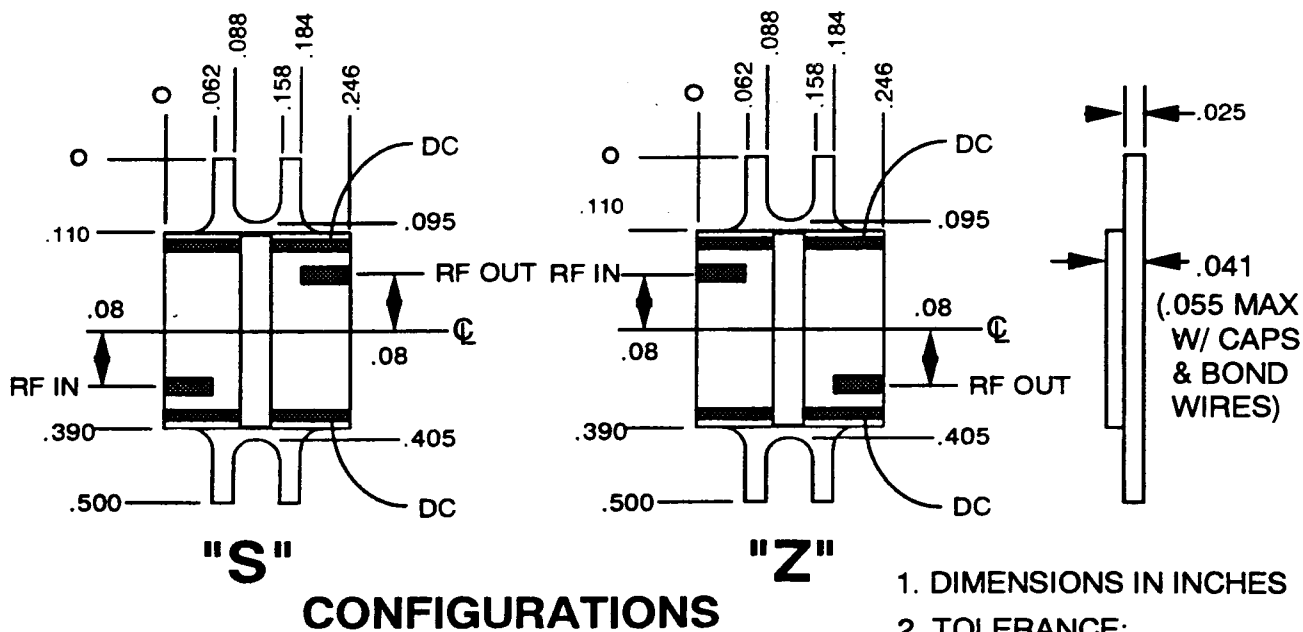

CONSTRUCTION:

The 15 mil alumina substrates and 10 mil copper FET ridge are brazed onto the 25 mil Cu-W carrier using AuGe preform. The GaAs FETs (standard 5 mil thickness) are attached to the Cu ridge using AuSn preform. All capacitors are attached using AuSn preforms. The flanges are designed to accommodate 0-80 UNF-2A socket or Fillister head screws on .400 center-to-center hole spacing. The modules are mechanically and electrically designed to be cascaded.

NOTES:

1. Custom module specifications and/or custom module mechanical configurations are available.
2. OPERATING TEMPERATURE RANGE IS -55°C to +105°C.
3. All modules are serialized and shipped with data measured at 25°C. Data includes swept small signal gain, swept input and output return loss. Noise figure and P-1dB are measured in 1 GHz increments. Special module testing is available.
4. Test fixtures are available.
5. Microwave Technology reserves the right to ship modules with gain and/or power above the typical specifications.

4268 Solar Way Fremont, CA 94538 510-651-6700 FAX 510-651-2208

10/22/91

All rights reserved. MicroWave Technology, Inc. All specifications subject to change without notice.