

HID & SYSTEM MANAGEMENT PRODUCTS, SYSTEM MGMT IC FAMILY

DESCRIPTION

The ACPItroller™ 342 UR8HC342 is a single IC that functions both as an 8042-type Human Input Device Controller (HIDC) and an ACPI-compliant Embedded Controller (EC). The UR8HC342 provides the typical functionality of an 8042-type HID Controller with embedded key and motion scanning. In addition, the UR8HC342 functions as an ACPI-compliant Embedded Controller (EC) and SMBus host.

The IC achieves unparalleled minimum power consumption (typically less than 1µA) due to Semtech's patented Zero-Power™ technologies for both PS/2 ports and the SMBus port - an industry first. The ACPItroller™ 342 can power down even when devices are connected and active. Based on Semtech's patented Zero-Power™ technology, the UR8HC342 always operates in the "STOP" mode, independently of the configuration and without any data or event losses.

Using the UR8HC342, system designers can implement systems that take advantage of the SMBus, the Smart Battery System, and the ACPI specifications, all using a single IC. The UR8HC342 can be customized easily through an extensive library of hardware and firmware modules in order to accommodate specialized configurations at low production cost.


FEATURES

- Acts as an 8042 HID and ACPI Embedded Controller
- Typically consumes less than 1µA
- Two external PS/2 ports for external keyboard and mouse with auto-detect and hot-plug support
- Patented Zero-Power™ operation of all PS/2 ports and the SMBus port - an industry first
- Simultaneous operation of external and internal input devices
- AlphaMouse™ Pointing Devices Manager provides Mousewheel support- a first for an EC
- Acts as a keyboard controller and encoder for an 8 x 16 keyboard matrix; supports all three keyboard scan code sets
- AlphaKey™ keyboard manager enables matrix programming
- Support of up to 6 ACPI GPE interrupt inputs
- 100% compatible with the ACPI specifications
- SMBus compatible host complies with version 1.0 of the SBS/SMBus specifications
- Firmware filters any dangerous SMBus commands
- Offers an Internal Virtual SMBus Device (IVSD), GPIO, and 10-bit A/D
- Three-volt and five-volt operation
- Customized versions available
- Supports active PS/2 multiplexing

APPLICATIONS

- Handhelds / Notebooks
- Industrial / Vertical systems
- ACPI-compatible systems
- Single Board Computers


PIN ASSIGNMENTS

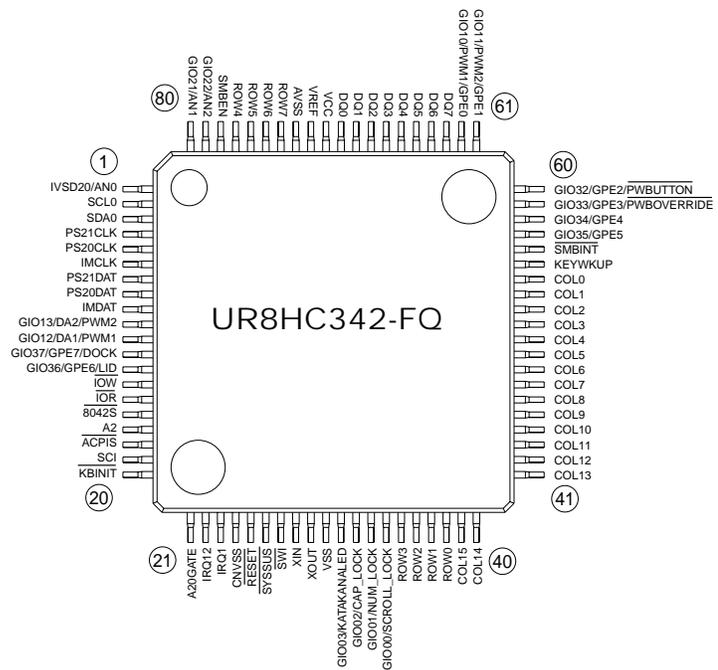

ORDERING CODE

Package options	Pitch in mm's	TA = 0°C to +75°C
80-pin, Plastic LQFP	0.5	UR8HC342-XX-FQ
Other materials	Type	Part number
Technical Reference Manual	Document	DOC8-342-TR-XXX

XX = Optional for customization
 XXX = Denotes revision number

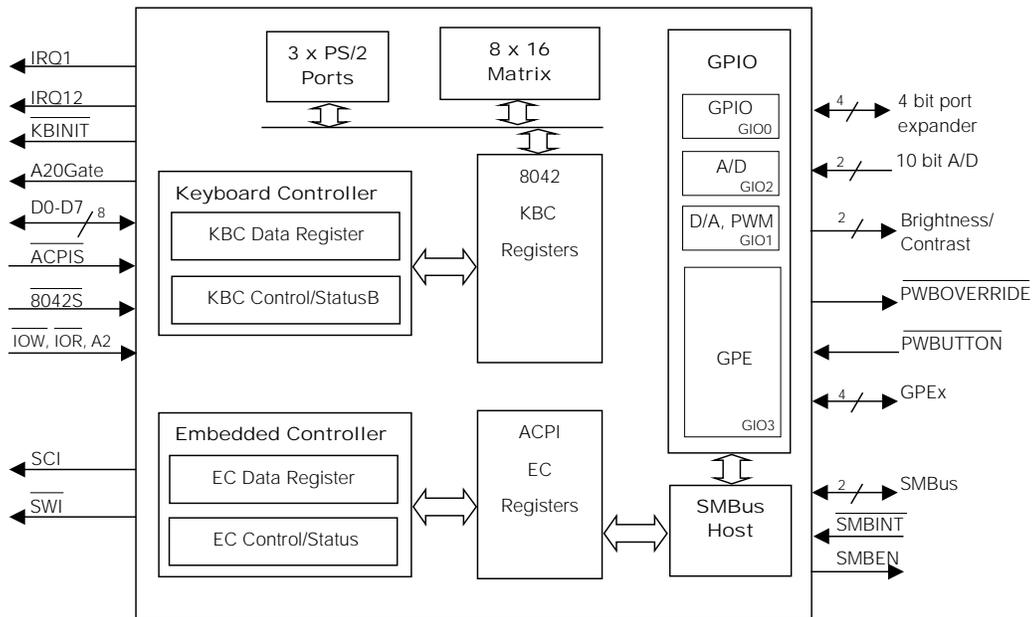ACPITROLLER™ 342 BLOCK DIAGRAM


PIN DEFINITIONS

Pin Numbers

Mnemonic	LQFP	Name and Function
Power Supply		
AVSS	73	Analog Signal Ground
CNVSS	24	Should be tied to ground
VCC	71	Vcc 3-5 Volts
VREF	72	Analog circuitry reference voltage
VSS	30	Ground
Oscillator pins		
XIN	28	Oscillator input (8 MHz operating freq)
XOUT	29	Oscillator output
Reset		
_RESET	25	Controller hardware reset pin
System bus interface pins		
_8042S	16	8042 keyboard controller port select signal input
_ACPIS	18	ACPI embedded controller port select signal output
_IOR	15	X-bus/ISA address I/O signal input
_IOW	14	X-bus/ISA address I/O write signal input
_IRQ1	23	Keyboard interrupt output
_IRQ12	22	Mouse interrupt output
_KBINIT	20	Keyboard initialize output
A2	17	X-bus / ISA address 2 input
A20GATE	21	A20 Gate output signal
DQ0-DQ7	70-63	X-bus/ ISA parallel data I/O ports

ACPI, SMBus, and general purpose I/O signals

SCI	19	System control interrupt output
_SMBINT	56	SMBus interrupt
_SWI	27	System wake-up event interrupt output
_SYSSUS	26	System suspend input
GIO00/SCROLL_LOCK	34	This pin can be programmed to act as a keyboard LED or as a GPIO pin.
GIO01/NUM_LOCK	33	This pin can be programmed to act as a keyboard LED or as a GPIO pin.
GIO02/CAP_LOCK	32	This pin can be programmed to act as a keyboard LED or as a GPIO pin.
GIO03/KATAKANALED	31	This pin can be programmed to act as a keyboard LED or as a GPIO pin.
GIO10/PWM1/GPE0	62	GIO1 bit 0 or PWM output or ACPI GPE
GIO11/PWM2/GPE1	61	GIO1 bit 1 or PWM output or ACPI GPE
GIO12/DA1/PWM1	11	This pin can be configured as GPIO, as D/A output, or as PWM output.

PIN DEFINITIONS (CON'T)

Pin Numbers		
Mnemonic	LQFP	Name and Function
ACPI, SMBus, and general purpose I/O signals (con't)		
GIO13/DA2/PWM2	10	This pin can be configured as GPIO, as D/A output, or as PWM output.
GIO20/AN0	1	This pin can be configured as a 10-bit A/D input or logic I/O.
GIO21/AN1	80	This pin can be configured as a 10-bit A/D input or logic I/O.
GIO22/AN2	79	This pin can be configured as a 10-bit A/D input or logic I/O.
GIO36/GPE6/LID	13	GIO3 bit 0 or ACPI general purpose event (GPE); capable of detecting both negative and positive signal transitions; typically serves the LID ACPI function
GIO37/GPE7/DOCK	12	GIO3 bit 1 or ACPI GPE; capable of detecting both negative and positive signal transitions; typically serves the DOCK ACPI function
GIO32/GPE2/_PWBUTTON	60	GIO3 bit 2 or ACPI GPE; typically an ACPI ""Power Button"" input
GIO33/GPE3/_PWBOVERRIDE	59	GIO3 bit 3 or ACPI GPE; typically an ACPI ""Power Button Override"" input
GIO34/GPE4	58	GIO3 bit 4 or ACPI GPE 4
GIO35/GPE5	57	GIO3 bit 5 or ACPI GPE 5
SCL0	2	This pin acts as the clock line for the SMBus
SDA0	3	This pin acts as the data line for the SMBus
SMBEN	78	This output pin allows the SMBus latch to notify the ACPItroller™ Basic when SMBus activity has been detected. It is used to wake the ACPItroller™ Basic from sleep mode, and to disable all PS/2 inputs while SMBus processing is taking place.
Scanned Matrix Pins		
COL0-COL15	54-39	Column matrix outputs
KEYWKUP	55	Key wake-up output
ROW0-ROW7	38-74	Row matrix inputs
PS/2 Ports		
IMCLK	6	PS/2 clock line for internal mouse
IMDAT	9	PS/2 data line for internal mouse
PS20CLK	5	Clock line for external PS/2 port 0; both external PS/2 ports support hot-plug ins and auto-select for keyboard or mouse
PS20DAT	8	Data line for external PS/2 port 0
PS21CLK	4	Clock line for external PS/2 port 1
PS21DAT	7	Data line for external PS/2 port 1

Note 1: An underscore in front of the pin mnemonic denotes an active low signal.



FEATURES

The following pages contain brief descriptions of the features provided by Semtech's UR8HC342. For more detailed information, please refer to the UR8HC342 ACPItroller™ 342 Technical Reference Manual, document number DOC8-342-TR-XXX.

EC INTERFACE

Semtech's UR8HC342 ACPI embedded controller (EC) interfaces to the Host's ISA bus via two I/O addresses. Three registers (Status, Command and Data) occupy the two I/O addresses. The operating system can communicate with the EC using the standard ACPI embedded controller command set. The host can either issue a command byte to the command register directly or send a data byte to the data port.

8042 HUMAN INPUT DEVICE CONTROLLER INTERFACE (HIDC)

The HIDC portion of Semtech's UR8HC342 interfaces the Host via two I/O addresses: 0x60 and 0x64. Three registers occupy the two I/O locations: Command, Status and Data. Any byte written by the Host system to the Command register is interpreted as a command. The UR8HC342 supports all the standard 8042 commands as well as many expanded commands.

Expanded commands provide such functionality as the ability to create password protection and disable an auxiliary input device.

SMBUS HOST CONTROLLER INTERFACE

The SMBus host manages one Zero-Power™ SMBus port for an SMBus device, such as a smart battery. Semtech's SMBus controller interfaces the system via ISA and complies with version v1.0 SBS and SMBus specifications.

The SMBus Host Controller Interface allows the Host processor, under control of the operating system, to manage both real and virtual devices on the SMBus, including those belonging to the Smart Battery System. Such devices include contrast/backlight controllers and temperature sensors. The SMBus Host Controller interface allows the OS to directly address devices on the SMBus. It provides a method of communicating with SMBus devices through a block of registers that reside in the Embedded Controller space. In addition, the UR8HC342's SMBus Host Controller handles certain SMBus functions related to alerts and error conditions.

INTERRUPT & GPE

The UR8H359 provides up to 5 customizable ACPI General Purpose Events (GPE). The IC generates two types of interrupts: SCI and SWI. The type of interrupt generated depends on the type of event that caused it. When a standard SMBus command occurs, the EC generates an SCI interrupt. For any other General Purpose Events (GPE), an SWI interrupt occurs. GPE events can include lid and dock events or power button presses.

SWI interrupts have the ability to wake-up the system if it is in suspend. SCI interrupts cannot do this.

POWER MANAGEMENT

The ACPItroller™ 342 typically consumes less than 1 μ A. For further power savings, the three PS/2 ports use Semtech's patented Zero-Power™ PS/2 technology and the one SMBus port uses Semtech's patented Zero-Power™ SMBus technology. The IC can power down even when devices are connected and active, and wake up when needed without data loss.

INTERNAL VIRTUAL SMBUS DEVICES

Modeled on SMBus devices, Internal Virtual SMBus Devices (IVSDs) are general-purpose devices that can be used for system tasks. The Host can address these devices through the ACPI EC interface in the same way it would address any external device residing on a SMBus port.

The IVSDs are implemented on shared pins of the UR8HC342. Specific pins can be used in other keyboard or embedded controller functions and the ISVDs need to be enabled through the configuration registers residing either in the EC or in the HID controller area. Once the devices are enabled, they can be accessed by the Host through standard interfaces defined in the relevant industry specification.

IVSDs can include port expanders, flat panel digital controls, 10 bit A/D or GPIO port.

ALPHAMOUSE™ POINTING DEVICES MANAGER

The AlphaMouse™ pointing devices manager can simultaneously support up to three mice (including those with MouseWheel) connected to both the external and internal PS/2 ports of the ACPItroller™ 342. Different types of standard mice (two-button, three-button, MouseWheel) can be connected simultaneously, as the AlphaMouse™ pointing device manager multiplexes the input. The manager supports hot plugging and hot swapping of standard two-button and three-button mice without a special driver, and of MouseWheel-enabled mice with a standard MouseWheel-capable driver.

The AlphaMouse™ pointing devices manager receives its pointing device input through one or more of the ACPItroller™ 342 PS/2 ports. The PS/2 Ports Driver will auto-detect the type of device connected to each PS/2 port. If the device reports itself as a pointing device, it will connect it to the AlphaMouse™ pointing devices manager for proper initialization and further data and command handling. The AlphaMouse™ pointing device manager communicates with the host system through the mouse port of the HID controller.

ALPHAMOUSE™ FEATURES

- Handles both internal and external mouse command communications
- Hot-plug and hot swapping support for external mice
- Transparent MouseWheel support for external mouse
- Simulates MouseWheel support for internal mouse
- Simulates MouseWheel operation, by merging normal mouse data with AlphaKey™ keyboard codes
- Merges internal and external mouse data
- Operates safely with PS/2 mouse protocol

ALPHAKEY™ FEATURES

- Supports IBM standard 101/102 keyboard including Windows®, On-Now Power keys and Japanese keyboard keys
- Programmable scan matrix
- Unique Zero-Power™ operation of the scanned matrix and the PS/2 embedded port
- Provides “Protocol Safe” handling of external PS/2 devices
- Allows hot-plug connection of external keyboard
- External and internal keyboards operate simultaneously; data is merged
- Auto-detects type of device in any external PS/2 port
- Interoperability between 3-Volt and 5-Volt PS/2 devices without the need for external level-shifting circuitry
- Supports all three Scan Code Sets
- Offers N-Key rollover and ghost key detection
- Enables single-hand data entry through “Sticky Key” mode of operation
- Supports embedded numeric keypad

ALPHAKEY™ KEYBOARD MANAGER

The AlphaKey™ Keyboard Manager is the most advanced keyboard management module in the industry today and the first one to integrate the laptop keyboard matrix with system management tasks through ACPI and SMBus.

Semtech’s AlphaKey™ provides OEMs with extreme flexibility both with PS/2 keyboard functionality as well as with designating which system management tasks users can control through the keyboard.

The AlphaKey™ Keyboard Manager communicates with the HID Controller, the ACPI EC, the Virtual SMBus Device Manager and the external PS/2 ports of the UR8HC342.

Semtech’s AlphaKey™ will simultaneously support both an external keyboard (including Windows® and Japanese layout keyboards) and an internal scanned key matrix. The internal scanned matrix layout can be programmed through an extended set of keyboard commands. AlphaKey™ handles PS/2 keyboard commands, supports external keyboard hot-plug-ins and merges internal and external data as if they were coming from one source.





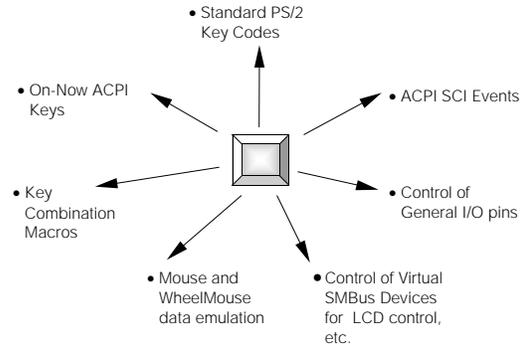


Figure 1: AlphaKey™ features

SUGGESTED INTERFACING FOR THE ACPITROLLER™ 342 UR8HC342-FQ

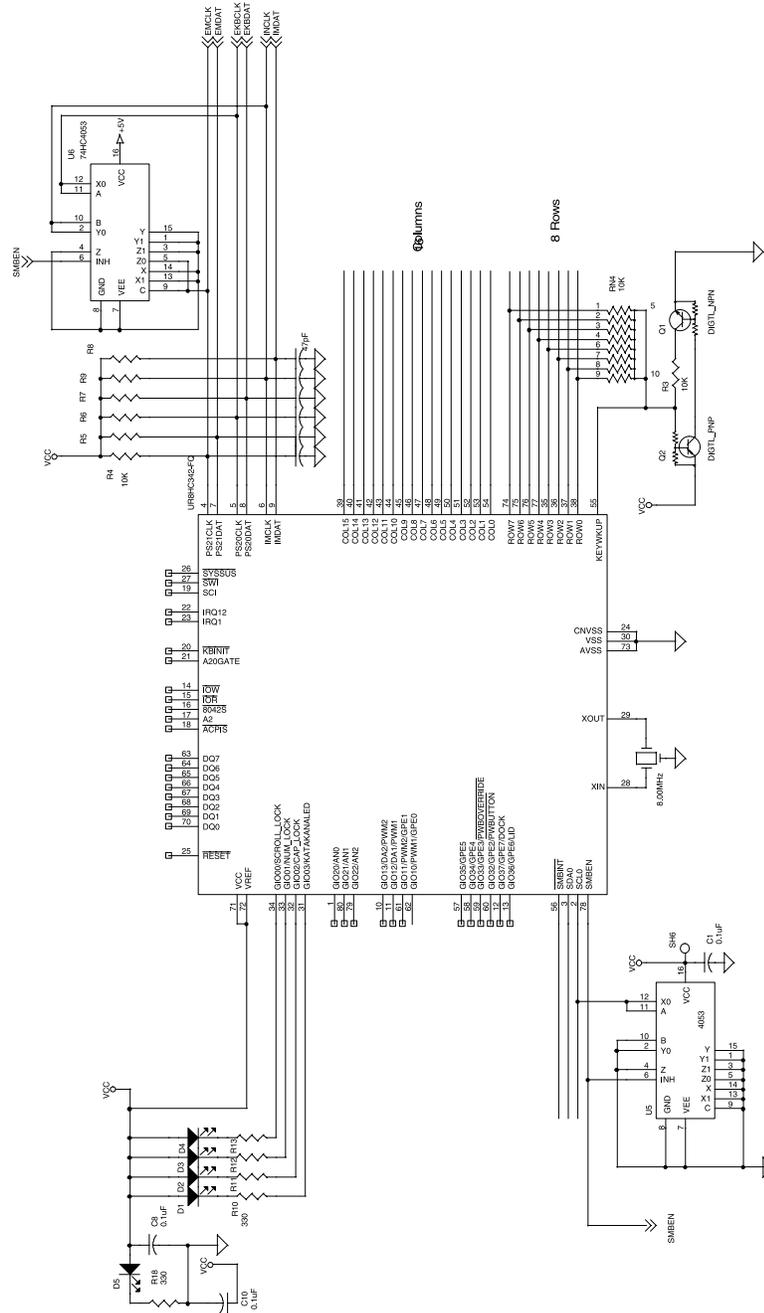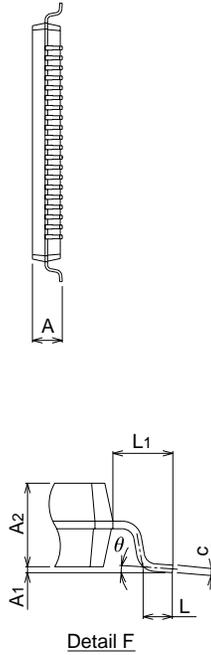

Copyright 1999-2000, Semtech Corp.
All rights reserved.

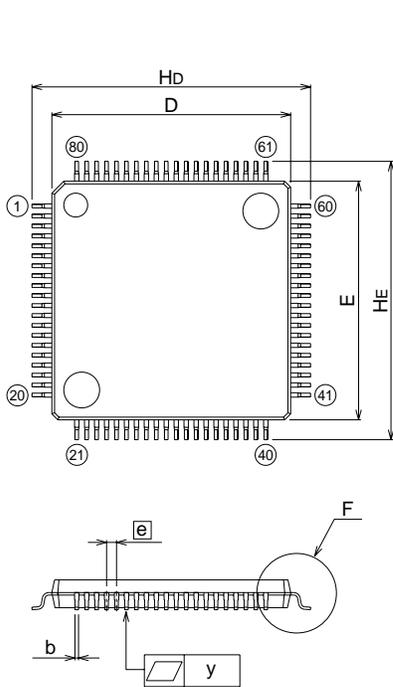

Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	1.7
A1	0	0.1	0.2
A2	-	1.4	-
b	0.13	0.18	0.28
c	0.105	0.125	0.175
D	11.9	12.0	12.1
E	11.9	12.0	12.1
e	-	0.5	-
Hd	13.8	14.0	14.2
HE	13.8	14.0	14.2
L	0.3	0.5	0.7
L1	-	1.0	-
y	-	-	0.1
θ	0°	-	10°
b2	-	0.225	-
l2	1.0	-	-
Md	-	12.4	-
ME	-	12.4	-

NOTES FOR ELECTRICALS
Note 1:

Current Consumption values do not include any loading on the Output pins or Analog Reference Current for the built-in A/D or D/A modules.

Note 2:

Since the built-in A/D module consumes current only during short periods of time (when A/D conversion is actually requested), the Analog Reference Current for the built-in A/D module is not a significant contributor to the overall power consumption.

Note 3:

The Analog Reference Current for the built-in D/A module correlates linearly to the Output Voltage. For D/A output of 0V, the Analog Reference Current is null. For D/A outputs approaching Full Scale (AVREF), the maximum Analog Reference Current is indicated in this Table. This current is a significant contributor to the overall power consumption.

UR8HC342 ELECTRICAL CHARACTERISTICS, (CON'T)
Recommended Operating Conditions, Digital Section

(VSS = 0V, Ambient Temperature TA is in the range TLOW to THIGH)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	VDD	2.7	3.0	5.5	V
Input logic high voltage					
All pins except 2-9	VIH	0.8VDD		VDD	V
Pins 2-9 (PS/2 ports xxxDAT, xxxCLK, GIO16/SW16, GIO17/SW17)	VIH	0.8VDD		5.5	V
Input logic low voltage					
All pins except 28	VIL	0		0.2VDD	V
Pin 28 (OSCI)	VIL	0		0.16VDD	V
Input current VI = Vss, VDD)	IIL / IIL	-5.0	0	5.0	µA
Input Pull-up Current (pins 56-58 / IP6-IP8, VI = Vss)	IPUP	-120		-10	µA
Output voltage					
IOH = -1.0 mA	VOH	VDD-1.0			V
IOL = 1.6 mA	VOL			0.4	V
Current Consumption (see note 1 below)					
Full Speed Mode (Fosc=4MHz)	IDD		3.5	7.0	mA
Reduced Power Mode (Fosc=4MHz)	IDD		750		µA
Stop Mode (Interrupts active, Fosc=0)	IDD		.1	1.0 (TA = 25°C) 10 (TA = 85°C)	µA

Recommended operating conditions, analog section

(VSS = 0V, Ambient Temperature TA is in the range TLOW to THIGH)

Parameter	Symbol	Min	Typ	Max	Unit
Analog Signal Ground	AVSS		0		V
Analog Reference Voltage	AVREF	2.7	VDD	VDD	V
A/D Resolution -				10	Bits
A/D Absolute Accuracy				± 4	LSb
A/D Analog Input Voltage Range	VIA	AVSS		AVREF	V
A/D Analog Input Current Analog Reference Current (see note 2) (A/D is active)	IiA IAVREF			5.0 200	µA
D/A Resolution -				8	Bits
D/A Absolute Accuracy -				2.5	%
D/A Output Impedance	Ro	1	2.5	4.0	KOhms
Analog Reference Current (see note 3) (D/A is active, Output = Full Scale)	IAVREF			3.2	mA

Note 1: please see left

Note 2: please see left

Note 3: please see left

This Page Left Intentionally Blank

For sales information
and product literature,
contact:

HID & System Mgmt Division
Semtech Corporation
568 Broadway
New York, NY 10012
hidinfo@semtech.com
<http://www.semtech.com>
212 226 2042 Telephone
212 226 3215 Telefax

Semtech Western Regional Sales
805-498-2111 Telephone
805-498-3804 Telefax

Semtech Central Regional Sales
972-437-0380 Telephone
972-437-0381 Telefax

Semtech Eastern Regional Sales
203-964-1766 Telephone
203-964-1755 Telefax

Semtech Asia-Pacific Sales Office
+886-2-2748-3380 Telephone
+886-2-2748-3390 Telefax

Semtech Japan Sales Office
+81-45-948-5925 Telephone
+81-45-948-5930 Telefax

Semtech Korea Sales Sales
+82-2-527-4377 Telephone
+82-2-527-4376 Telefax

Northern European Sales Office
+44 (0)2380-769008 Telephone
+44 (0)2380-768612 Telefax

Southern European Sales Office
+33 (0)1 69-28-22-00 Telephone
+33 (0)1 69-28-12-98 Telefax

Central European Sales Office
+49 (0)8161 140 123 Telephone
+49 (0)8161 140 124 Telefax

Copyright 2000-2001 Semtech Corporation. All rights reserved.
ACPI/Troller and Zero-Power are trademarks of Semtech Corporation. Semtech is a registered trademark of Semtech Company. All other trademarks belong to their respective companies.

INTELLECTUAL PROPERTY DISCLAIMER
This specification is provided "as is" with no warranties whatsoever including any warranty of merchantability, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. A license is hereby granted to reproduce and distribute this specification for internal use only. No other license, expressed or implied to any other intellectual property rights is granted or intended hereby. Authors of this specification disclaim any liability, including liability for infringement of proprietary rights, relating to the implementation of information in this specification. Authors of this specification also do not warrant or represent that such implementation(s) will not infringe such rights.