

## Power Management Module for ISDN NT1+


Rev. 03

Type	Vi	Vo	Po
NT1+/UR2	180<Vi1<264Vrms	+/-40V	4.5W
		+5V	720mW
		-21V	900mW
	40<Vi2<120 Vdc	-50V	100mW
		-150V	700mW

## FEATURES

- COMBINED AC+DC CONVERTER FOR ISDN NT1+ APPLICATION
- Uo INTERFACE (DC) AND MAIN (AC) INPUTS TO ENABLE NPM (Normal Power Mode) AND RPM (Restricted Power Mode) CONDITIONS
- INPUT FILTER TO MEET EMC REQUIREMENTS
- 5 INSULATED MAIN OUTPUTS
- PEAK INPUT OVERVOLTAGE WITHSTANDING
- INPUT FUSE ON AC MAIN INPUT
- INPUTS TO OUTPUTS INSULATION
- AUXILIARY LOGIC OUTPUT TTL-COMPATIBLE FOR NPM/RPM MODE INDICATION (EM SIGNAL & GREEN LED). 3mA OUTPUT SOURCE CURRENT
- AUXILIARY LOGIC OUTPUT TTL-COMPATIBLE FOR U-INTERFACE DETECTION (RED LED). 3mA OUTPUT SOURCE CURRENT

## PRODUCT VIEW

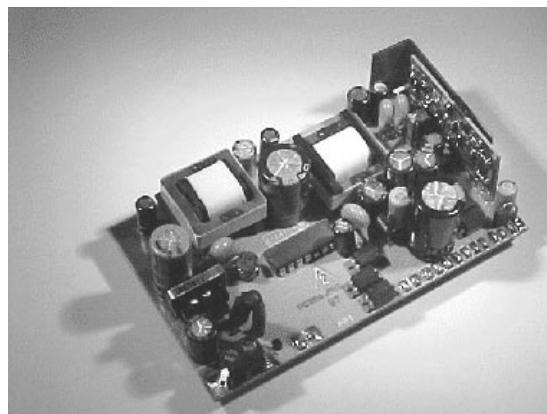

## ORDERING NUMBER: GS-NT1+/UR2

- AUXILIARY LOGIC OUTPUT TTL-COMPATIBLE FOR AUTO SETTING TO ISDN OR ANALOG PHONE CONNECTION TO U-INTERFACE (RELAY). 3mA OUTPUT SOURCE CURRENT
- INTERNAL RELAY FUNCTION FOR Vo1 POLARITY REVERSE
- ANALOG OUTPUTS EMERGENCY CONDITION PROGRAMMABLE VIA EXTERNAL COMMAND, TTL COMPATIBLE, 1mA SINK CURRENT
- U-INTERFACE ACCORDING TO ETR 080 WITH EXTERNAL CAPACITOR </= 2.2 uF
- S-INTERFACE ACCORDING TO ETS 300 012
- SAFETY COMPLIANCE ACCORDING TO EN60950
- MECHANICAL DIMENSIONS (LxWxH): 96x58x26.6

### DESCRIPTION

The NT1+/UR2 Power Management Module is a comprehensive solution for ISDN-NT1 "Plus" (Network Termination Basic Access type Plus) equipment, combining both AC-DC and DC-DC functions.

The NT1+ Power Management Module (NT1+ PMM) provide the NT1+ equipment with all necessary supply voltages as well as control signals to operate in the different operating modes, typically the Normal Power Mode (NPM) and the Restricted Power Mode (RPM).

Connected to the main, Input 1 is the AC input power to the NT1+ PMM, source of the whole necessary power in normal operating mode, namely in NPM. Input 2 is the DC power source when in RPM, therefore to connect to the U-Interface.

When the main is available (230 Vac in this version) NT1+ PMM operate in Normal Power Mode, therefore it supply +40V (output 1) to the S-Interface being the output power 4.5 W. Output 2 delivers 5V (up to 720mW) for the logics and output 3 delivers -21V (up to 900 mW). Out voltage 4 is -50V with 100 mW output power. Last, output 5 delivers -150V and the output power can reach peaks of 700 mW.

When the main is missing, the module remains active but only in Restricted Power Mode (RPM). The only power source in RPM is the Input 2, the U-Interface (Vi2). Therefore in RPM the following condition apply to outputs 1 and 2: output 1 reverses the voltage (it becomes -40V) and the maximum power Pout is reduced to 420 mW.

P2max is reduced to 450 mW typically, however the output power available at outputs 2,3,4,5 mainly depend on input power available from the "U Interface" Vi2, therefore subject of variation as per local application and regulation.

In RPM it is also possible to set a different "emergency condition" setting HIGH the auxiliary input 3 (analog emergency input, Vin3). In this case Pout1 is reduced to 25mW, voltage level being -40V.

The following tables give you details of the various parameters in the 3 different operating modes, namely NPM, RPM with Vi3 LOW, RPM with Vi3 HIGH.

Availability of the input AC main is also acknowledged by a specific auxiliary output (out 6, "EM signal"), a TTL-compatible signal set HIGH (to logic level "1") when the main is available and LOW when the AC main is missing.

An auxiliary output (Output RELAY, pin 11) is available for U-INTERFACE voltage level acknowledgement, the threshold level being fixed at 85 V. When U-INTERFACE voltage level is below 85 V, a POTS is connected therefore the auxiliary relay output is LOW. Vice versa, this output goes HIGH when U is higher than 85V (ISDN line card).

The presence of the "U" is detected by an other auxiliary output (out 7) that is HIGH only when  $V_{in2} > 34V$ .

The NT1+ PMM provides double insulation (3000 Vrms) between the inputs (1 and 2), and among the input 1 and all the outputs. Basic insulation exists among Out1 and all other outputs. The other outputs (including the 2 auxiliary outputs) and the input 3, share the same common ground.

Double insulation (2000 Vrms) is provided among Input 2 (DC "U") and all outputs.

The NT1+ Power Management Module operate in the range -10 to +70 °C, storage temperatures in the range -40 to +85 °C are allowed.

**ELECTRICAL CHARACTERISTICS** when in **NPM** (Tamb=25°C, unless otherwise specified.)**NPM Standard Condition:** Vin1 = 180 to 264 Vrms    Vin2 = 40 to 120 Vdc

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Vi1	AC Input Voltage 1		180		264	Vrms
Vi2	DC Input Voltage 2	any polarity	40		120	Vdc
fi	Vi1 Input Frequency	Vi1 = 230 Vrms	43		56	Hz
Vi1st	Start up Input 1 voltage	Output parameters as per NPM Standard Condition			175	Vrms
Pi1	Input 1 Apparent Power	NPM Standard Condition			15	VA
Vi2nd	Start up Input 2 voltage	Output parameters as per Std. Condition			40	Vdc
Vo1	Output Voltage 1	Standard condition	34	40	42	V
Vo2	Output Voltage 2	Standard condition	4.75	5	5.25	V
Vo3	Output Voltage 3	Standard condition	-20	-21	-24	V
Vo4	Output Voltage 4	Standard condition	-48	-50	-65	V
Vo5	Output Voltage 5	Standard condition	-140	-150	-170	V
Vo6	Auxiliary Output 6 (EM)	Standard condition	3.75	5	5.25	V
Vo7	Auxiliary Output 7 (red LED)	Standard condition	3.75	5	5.25	V
Vor1,3,4,5	Output Ripple voltage 1,3,4,5	Standard condition BW: 0-20 MHz			100	mVrms
Vor2	Output Ripple voltage 2	Standard condition BW: 0-20 MHz			30	mVrms
Po1	Output Power 1	Std. condition according to ETS300 012, E5.1.5, E5.1.6, E5.1.7 (n=4)			4.5	W
Po2	Output Power 2	Standard condition			720	mW
Po3	Output Power 3	Standard condition			900	mW
Po4	Output Power 4	Standard condition			100	mW
Po5	Output Power 5	The output is current limited at 3 mA +/- 0.2 mA, with 100uF capacitor			700	mW
Vi1th	NPM => RPM mode Vi1 threshold	Output parameters as per Standard Condition			160	Vrms
Ttr	Transition time	transition NPM => RPM and vice versa according to ETS300 012, E5.1.3 (n=4)			5	ms
Vi1pk	Input 1 Transient overvoltage	t = 10/700 us as per 1TR9 Dec. 96	2000			V
Vi1pk	Input 1 Transient overvoltage	common mode test according to ETS300 047-5p5.6	2500			V
Vi1pk	Input 1 Transient overvoltage	impuls transfer from main according to ETS300 047-5p5.7.1	2500			V
Vo1pk	Output 1 Transient overvoltage	t = 1,2/50 us	500			V
Vis	Insulation Voltage	Input 1 to outputs and input 1 to input 2, t=60s reinforced insulation as per EN60950	3000			V
Vist	Insulation Voltage	Input 1 to outputs t=10/700 us (pulse)	4000			V
th	Hold-up time	Vin = 180 Vrms Standard Condition	20			ms
MTBF	Mean Time Before Failure	Ground Fixed, MIL-HDBK-217E	1			Mh
Top	Oper. Ambient Temperature		-10		+70	°C


**ELECTRICAL CHARACTERISTICS** when in **RPM** (Tamb=25°C, unless otherwise specified.)**RPM Standard Condition:** Vin1 < 100 Vrms Vin2 = 40 to 120 Vdc Vin3 = LOW

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Vi1	AC Input Voltage 1			100	Vrms	
Vi2	DC Input Voltage 2	any polarity	40	120	Vdc	
Vi2nd	Start up Input 2 voltage	Output parameters as per Std. Condition		40	Vdc	
Vo1	Output Voltage 1	Standard condition	-34	-40	-42	V
Vo2	Output Voltage 2	Standard condition	4.75	5	5.25	V
Vo3	Output Voltage 3	Standard condition	-20	-21	-24	V
Vo4	Output Voltage 4	Standard condition	-48	-50	-65	V
Vo5	Output Voltage 5	Standard condition	-140	-150	-170	V
Vo6	Auxiliary Output 6 (EM)	Standard condition	0		1.25	V
Vo7	Auxiliary Output 7 (red LED)	Standard condition	3.75	5	5.25	V
Vor1,3,4,5	Output Ripple voltage 1,3,4,5	Standard condition BW: 0-20 MHz		100	mVrms	
Vor2	Output Ripple voltage 2	Standard condition BW: 0-20 MHz		30	mVrms	
Po1	Output Power 1	Std condition according to ETS300 012, E5.1.1, E5.1.4.1, E5.1.4.2, E5.1.5.3 (n=4)		420	mW	
Po2	Output Power 2	Standard condition	450		mW	
Po3	Output Power 3	Standard condition	450		mW	
Po4	Output Power 4	Standard condition	100		mW	
Po5	Output Power 5	Standard condition	700		mW	
Vi1st	RPM => NPM mode Vi1 threshold	Output parameters as per Standard Condition		175	Vrms	
Ttr	Transition time	transition NPM => RPM and vice versa according to ETS300 012, E5.1.3 (n=4)		5	ms	
Vi1pk	Input 1 Transient overvoltage	t = 10/700 us as per 1TR9 Dec. 96	2000		V	
Vi1pk	Input 1 Transient overvoltage	common mode test according to ETS300 047-5p5.6	2500		V	
Vi1pk	Input 1 Transient overvoltage	impuls transfer from main according to ETS300 047-5p5.7.1	2500		V	
Vo1pk	Output 1 Transient overvoltage	t = 1,2/50 us	500		V	
Vis	Insulation Voltage	Input 1 to outputs and input 1 to input 2, t=60s reinforced insulation as per EN60950	3000		V	
Vist	Insulation Voltage	Input 1 to outputs t=10/700 us (pulse)	4000		V	
th	Hold-up time	Vin = 180 Vrms Standard Condition	20		ms	
MTBF	Mean Time Before Failure	Ground Fixed, MIL-HDBK-217E	1		Mhours	
Top	Oper. Ambient Temperature		-10	+70	°C	
Tstg	Storage Temperature Range		-40	+85	°C	

**ELECTRICAL CHARACTERISTICS** when in **RPM** (Tamb=25°C, unless otherwise specified.)**RPM Standard Condition:** Vin1 < 100 Vrms   Vin2 = 40 to 120 Vdc   Vin3 =HIGH

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Vi1	AC Input Voltage 1		0		100	Vrms
Vi2	DC Input Voltage 2	any polarity	40		120	Vdc
Vi2nd	Start up Input 2 voltage	Output parameters as per Std. Condition			40	Vdc
Vo1	Output Voltage 1	Standard condition	-34	-40	-42	V
Vo2	Output Voltage 2	Standard condition	4.75	5	5.25	V
Vo3	Output Voltage 3	Standard condition	-20	-21	-24	V
Vo4	Output Voltage 4	Standard condition	-48	-50	-65	V
Vo5	Output Voltage 5	Standard condition	-140	-150	-170	V
Vo6	Auxiliary Output 6 (EM)	Standard condition	0		1.25	V
Vo7	Auxiliary Output 7 (red LED)	Standard condition	3.75	5	5.25	V
Vor1,3,4,5	Output Ripple voltage 1,3,4,5	Standard condition BW: 0-20 MHz			100	mVrms
Vor2	Output Ripple voltage 2	Standard condition BW: 0-20 MHz			30	mVrms
Po1	Output Power 1	Standard condition			25	mW
Po2	Output Power 2	Standard condition			450	mW
Po3	Output Power 3	Standard condition			450	mW
Po4	Output Power 4	Standard condition			100	mW
Po5	Output Power 5	Standard condition			700	mW
Vi1st	RPM => NPM mode Vi1 threshold	Output parameters as per Standard Condition			175	Vrms
Ttr	Transition time	transition NPM => RPM and vice versa according to ETS300 012, E5.1.3 (n=4)			5	ms
Vi1pk	Input 1 Transient overvoltage	t = 10/700 us as per 1TR9 Dec. 96	2000			V
Vi1pk	Input 1 Transient overvoltage	common mode test according to ETS300 047-5p5.6	2500			V
Vi1pk	Input 1 Transient overvoltage	impuls transfer from main according to ETS300 047-5p5.7.1	2500			V
Vo1pk	Output 1 Transient overvoltage	t = 1,2/50 us	500			V
Vis	Insulation Voltage	Input 1 to outputs and input 1 to input 2, t=60s reinforced insulation as per EN60950	3000			V
Vist	Insulation Voltage	Input 1 to outputs t=10/700 us (pulse)	4000			V
th	Hold-up time	Vin = 180 Vrms Standard Condition	20			ms
MTBF	Mean Time Before Failure	Ground Fixed, MIL-HDBK-217E	1			Mhours
Top	Oper. Ambient Temperature		-10		+70	°C
Tstg	Storage Temperature Range		-40		+85	°C

**NT1+ Power Management Module TOP VIEW** (dimensions in mm)

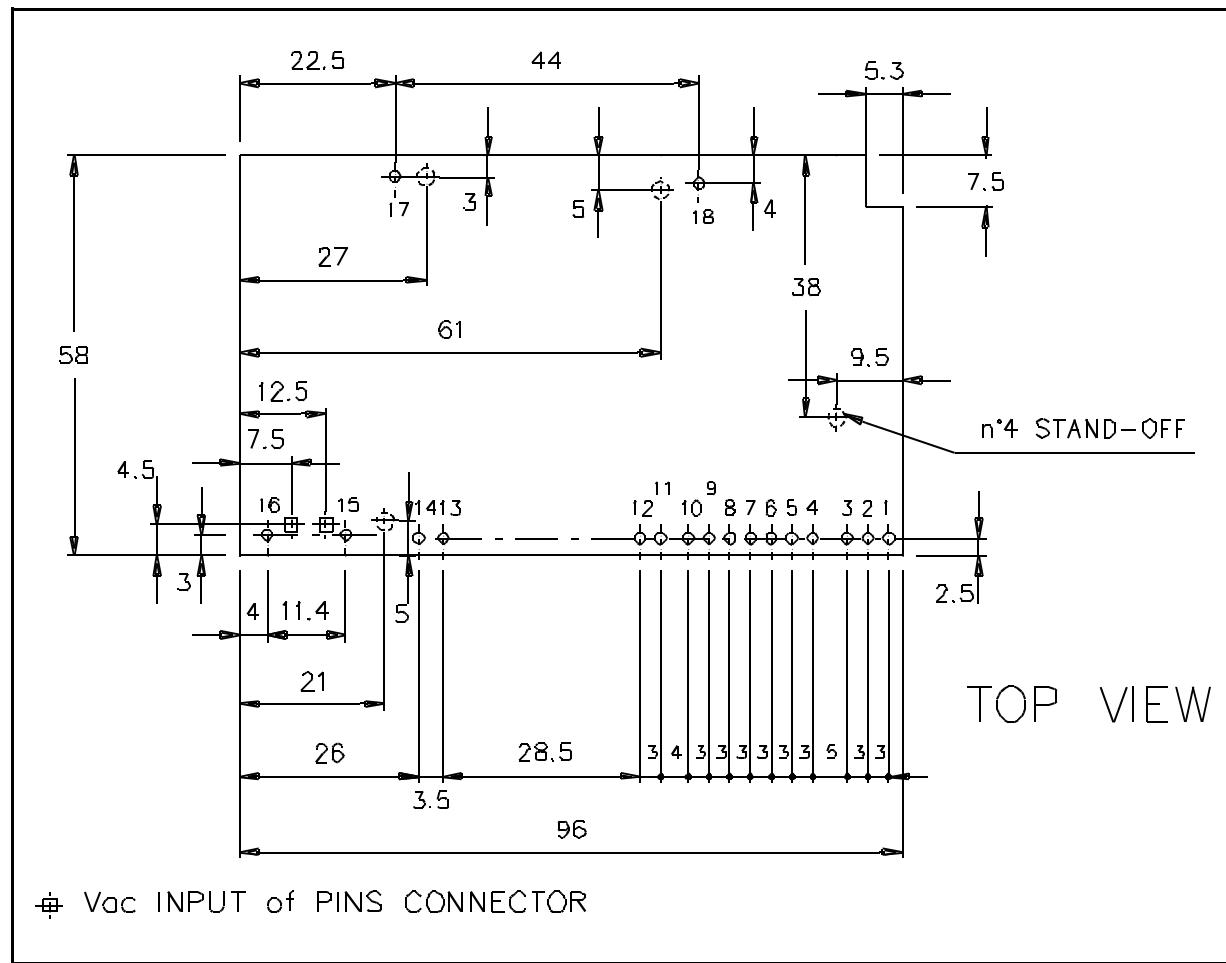


**PIN CONFIGURATION**

**Input 1 (230 Vac) applies to the Vac INPUT CONNECTOR**

Pin No	Signal	Pin No	Signal
1	Output 1 return	10	Output 7 (RED LED)
2	Output 1 (+/- 40 V)	11	Output RELAY
3	Output voltage for P.S. signal (PS20)	12	GND, Common return for output 2,3,4,5,6,7, Input 3
4	Output 3 (-21 V)	13	Vi2 Input Voltage 2, Vdc (any polarity)
5	Output 6 (EM, Green LED)	14	Vi2 Input Voltage 2, Vdc (any polarity)
6	Output 2 (+5 V)	15	Vi1 Input Voltage 1, VAC
7	Vin 3, Analog Emergency Input 3	16	Vi1 Input Voltage 1, VAC
8	Output 4 (-50 V)	17	N.C.
9	Output 5 (-150 V)	18	N.C.

## NT1+ Power Management Module SIDE VIEW (dimensions in mm)

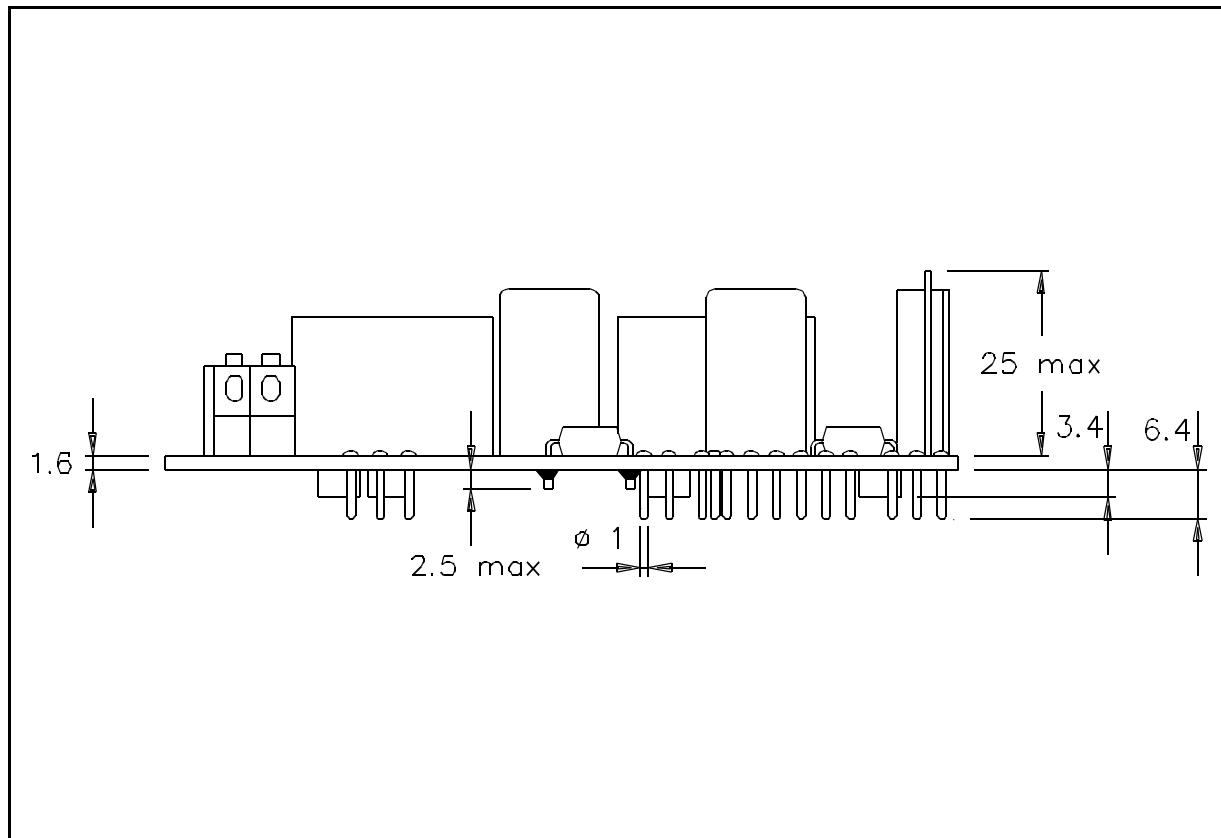

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -  
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>