
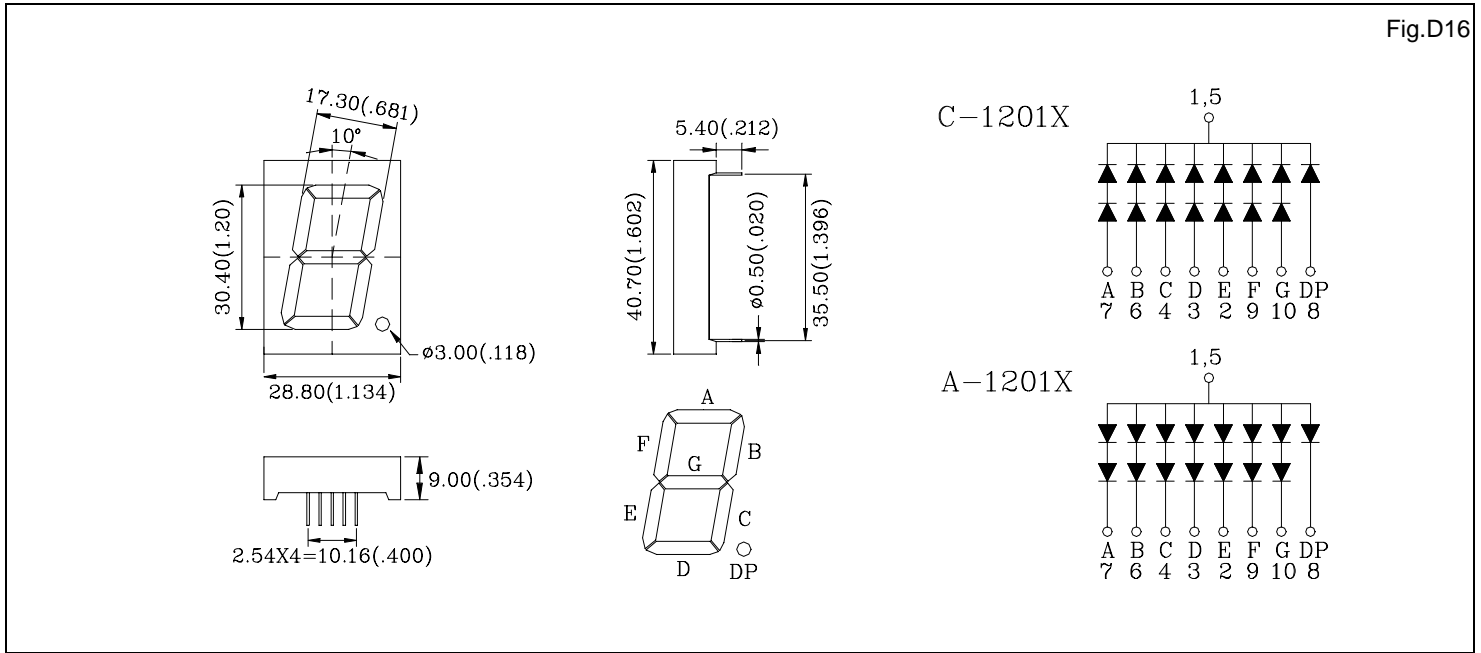


C/A-1021X, C/A-1201X SINGLE DIGIT DISPLAY

| Shape | Part No. | | Chip | | Wave Length λ_p (nm) | Electro-Optical Characteristics | | | Fig. No. |
|---|----------------|--------------|--------------|---------------|---------------------------------|---------------------------------|------|-------------|----------|
| | Common Cathode | Common Anode | Raw Material | Emitted Color | | Vf(V)20mA | | Iv(ucd)10mA | |
| | | | | | | Typ. | Max. | Typ. | |
|  | C-1021H | A-1021H | GaP | Red | 700 | 4.2 | 5.6 | 1000 | D15 |
| | C-1021E | A-1021E | GaAsP/GaP | Hi.effi Red | 635 | 4.0 | 5.6 | 4200 | |
| | C-1021G | A-1021G | GaP | Green | 565 | 4.2 | 5.6 | 4000 | |
| | C-1021Y | A-1021Y | GaAsP/GaP | Yellow | 585 | 4.2 | 5.6 | 3200 | |
| | C-1021SR | A-1021SR | GaAlAs | Super Red | 660 | 3.6 | 4.8 | 40000 | |
|  | C-1201H | A-1201H | GaP | Red | 700 | 4.2 | 5.6 | 1000 | D16 |
| | C-1201E | A-1201E | GaAsP/GaP | Hi.effi Red | 635 | 4.0 | 5.6 | 4200 | |
| | C-1201G | A-1201G | GaP | Green | 565 | 4.2 | 5.6 | 4000 | |
| | C-1201Y | A-1201Y | GaAsP/GaP | Yellow | 585 | 4.2 | 5.6 | 3200 | |
| | C-1201SR | A-1201SR | GaAlAs | Super Red | 660 | 3.6 | 4.8 | 40000 | |

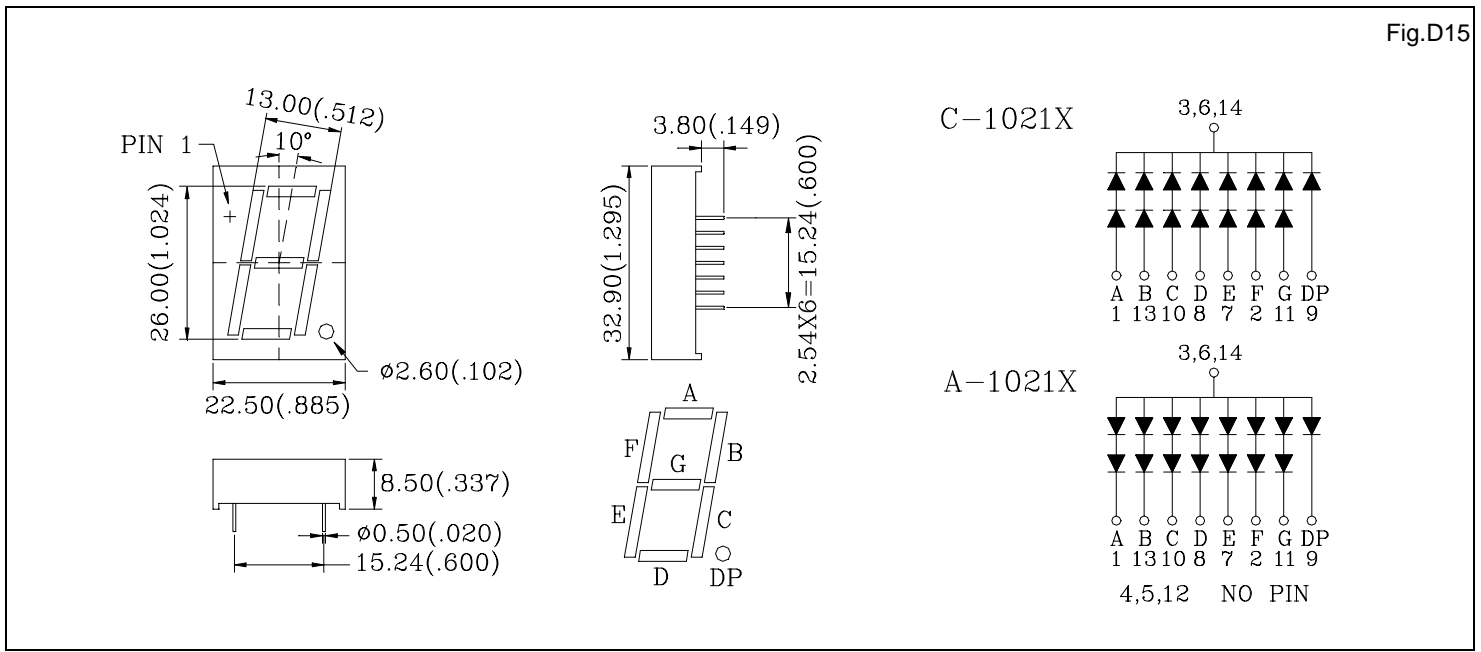

1.All dimension are in millimeters (inches).
2.Tolerance is ± 0.25 mm (0.01") unless otherwise specified.