


Glass Passivated Junction Rectifiers

Reverse Voltage
50 to 1000V
Forward Current 1.5A

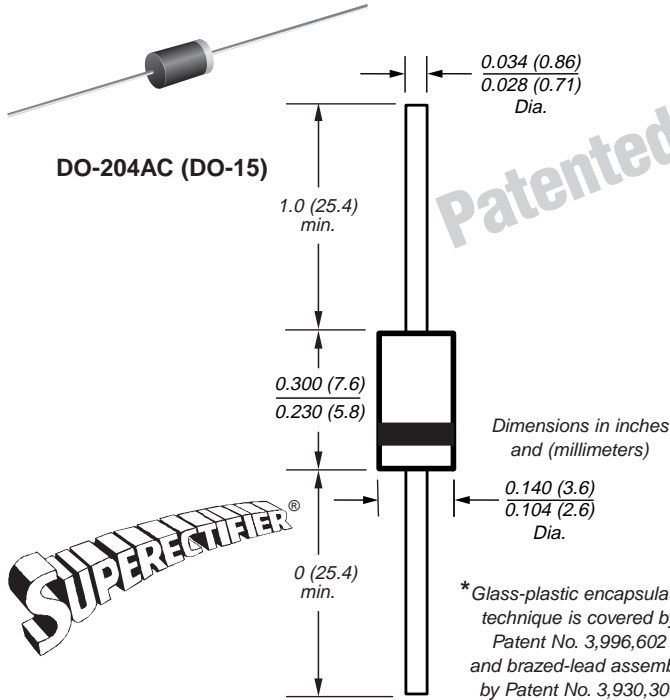

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.5 Ampere operation at $T_L = 70^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AC, molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.015 oz., 0.4 g

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symb.	1N5391GP	1N5392GP	1N5393GP	1N5394GP	1N5395GP	1N5396GP	1N5397GP	1N5398GP	1N5399GP	Unit
* Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	V
* Maximum RMS voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	V
* Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	V
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L = 70^\circ\text{C}$	$I_{F(AV)}$	1.5									A
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50									A
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A = 70^\circ\text{C}$	$I_{R(AV)}$	300									μA
Typical thermal resistance ⁽¹⁾	$R_{\theta JA}$	45									$^\circ\text{C}/\text{W}$
* Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175									$^\circ\text{C}$

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

* Max. instantaneous forward voltage at 1.5A $T_A = 70^\circ\text{C}$	V_F	1.4	V
* Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 150^\circ\text{C}$	I_R	5.0 300	μA
Typical reverse recovery time at $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$	t_{rr}	2.0	μs
Typical junction capacitance at 4.0V, 1MHz	C_J	15	pF

Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted *JEDEC registered values

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

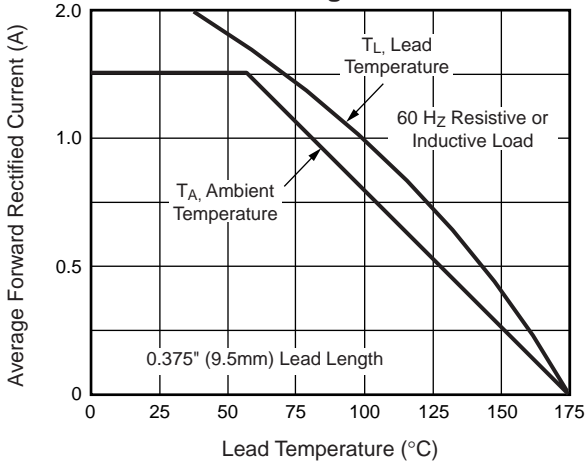


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

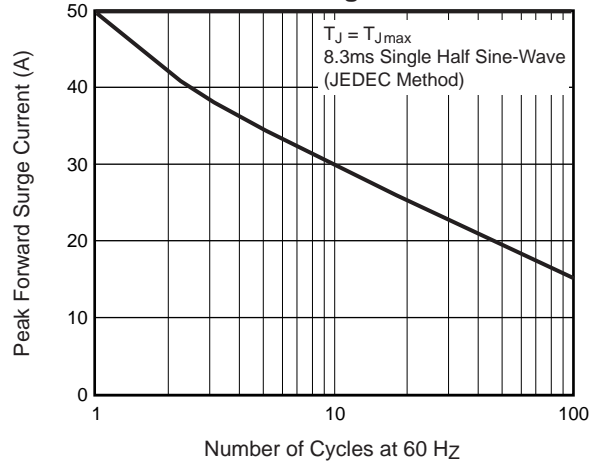


Fig. 3 – Typical Instantaneous Forward Characteristics

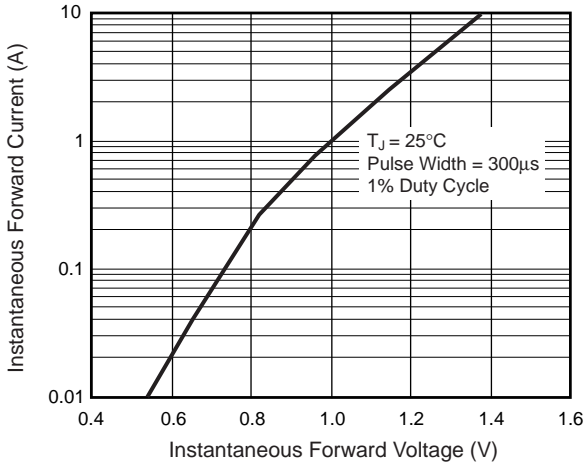


Fig. 4 – Typical Reverse Characteristics

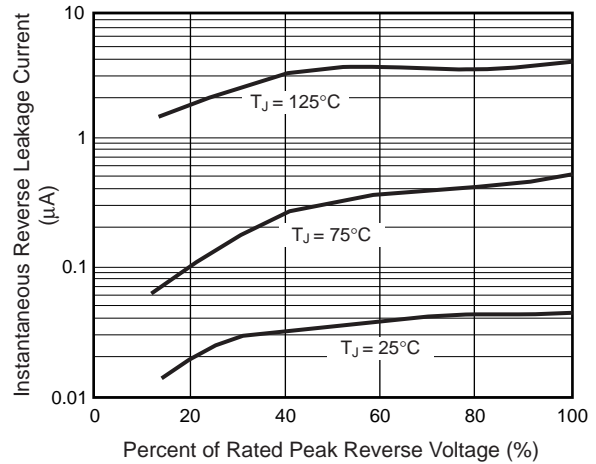


Fig. 5 – Typical Junction Capacitance


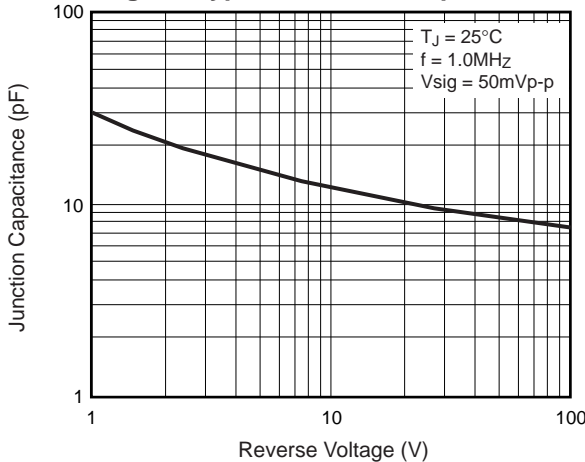


Fig. 6 – Typical Transient Thermal Impedance

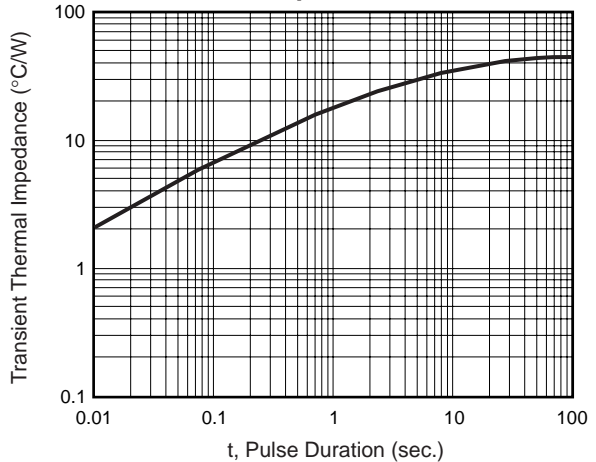

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.