

FST3384A 10-Bit Low Power Extended Input Voltage Bus Switch

General Description

The FST3384A provides 10 bits of high-speed CMOS TTL-compatible bus switches. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise. The device is organized as two 5-bit switches with separate bus enable (\overline{BE}) signals. When \overline{BE} is low, the switch is on and port A is connected to port B. When \overline{BE} is high, the switch is open and a high-impedance state exists between the two ports.

The FST3384A 10-bit bus switch is pin-for-pin and function compatible with the FST3384 device. It has the added feature of allowing extended negative input voltages on the I/O pins. The FST3384A bus switch, unlike most bus switches on the market, will not falsely turn on when \overline{BE} is high and negative undershoot voltages are encountered on the I/O pins. Thus it is "undershoot hardened" (see related application note) tolerating undershoots up to $-1.5V$.

Typical applications include IDE bus connector interfaces, PCI card interfaces, backplane card interfaces, and other noisy environments where switches are needed.

Features


- Extended input voltage design tolerates input undershoots up to $-1.5V$
- 10Ω switch connection between two ports
- Ultra low power with $2\mu A$ typical I_{CC}
- Zero ground bounce in flow-through mode
- Control inputs compatible with TTL level
- Available in SOIC, QSOP and TSSOP

Ordering Code:

Order Number	Package Number	Package Description
FST3384AWM	M24B	24-Lead (0.300" Wide) Small Outline Package, SOIC JEDEC
FST3384AQSC	MQA24	24-Lead (0.150" Wide) Shrink Small Outline Package, QSOP
FST3384AMTC	MTC24	24-Lead Thin Small Outline Package, TSSOP


Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Diagram



Connection Diagram

Pin Assignment
SOIC, QSOP and TSSOP



Pin Descriptions

Pin Names	Description
$\overline{\text{BE}} \text{ A}, \overline{\text{BE}} \text{ B}$	Bus Switch Enable
$\text{A}_0\text{--}\text{A}_9$	Bus A
$\text{B}_0\text{--}\text{B}_9$	Bus B

Truth Table

$\overline{\text{BE}} \text{ A}$	$\overline{\text{BE}} \text{ B}$	$\text{B}_0\text{--}\text{B}_4$	$\text{B}_5\text{--}\text{B}_9$	Function
L	L	$\text{A}_0\text{--}\text{A}_4$	$\text{A}_5\text{--}\text{A}_9$	Connect
L	H	$\text{A}_0\text{--}\text{A}_4$	HIGH-Z State	Connect
H	L	HIGH-Z State	$\text{A}_5\text{--}\text{A}_9$	Connect
H	H	HIGH-Z State	HIGH-Z State	Disconnect

Absolute Maximum Ratings (Note 1)

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Switch Voltage (V_S)	-0.5 to +7.0V
DC Input Input Voltage (V_I) (Note 2)	-0.5 to +7.0V
DC Input Diode Current with ($V_I < 0$)	-20 mA
DC Output (I_O) Sink Current	120 mA
Storage Temperature Range (T_{STG})	-65°C to +150°C
Power Dissipation	0.5W

Recommended Operating Conditions

Supply Voltage (V_{CC})	4.0V to 5.5V
Free Air Operating Temperature (T_A)	-40°C to +85°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

DC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	T _A = −40°C to +85°C			Units	Conditions
			Min	Typ (Note 5)	Max		
V _{IK}	Maximum Clamp Diode Voltage	4.75	−1.2			V	I _{IN} = −18 mA
V _{IH}	Minimum High Level Input Voltage	4.75–5.25	2.0			V	
V _{IL}	Maximum Low Level Input Voltage	4.75–5.25	0.8				
I _{IN}	Maximum Input Leakage Current	0	10			μA	0 ≤ V _{IN} ≤ 5.25V
		5.25	±1				
I _{OZ}	Maximum 3-STATE I/O Leakage	5.25	±10			μA	0 ≤ A, B ≤ V _{CC}
I _{OS}	Short Circuit Current	4.75	100			mA	V _I (A), V _I (B) = 0V, V _I (B), V _I (A) = 4.75V
R _{ON}	Switch On Resistance (Note 3)	4.75	6	12	Ω	V _I = 0V, I _{ON} = 30 mA	
			15	25	Ω	V _I = 2.4V, I _{ON} = 15 mA	
I _{CC}	Maximum Quiescent Supply Current	5.25	0.2	10	μA	V _I = V _{CC} , GND I _O = 0	
ΔI _{CC}	Increase in I _{CC} per Input (Note 4)	5.25	2.5			mA	V _{IN} = 3.15V, I _O = 0 Per Control Input

Note 3: Measured by voltage drop between A and B pin at indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 4: Per TTL driven Input ($V_{IN} = 3.15\text{V}$, control inputs only). A and B pins do not contribute to I_{CC} .

Note 5: All typical values are at $V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$.

AC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	T _A = -40°C to +85°C C _L = 50 pF			Units
			Min	Typ (Note 6)	Max	
T _{PLH} T _{PHL}	Data Propagation Delay An to Bn or Bn to An (Note 7)	4.75	0.50			ns
T _{PZL} T _{PZH}	Switch Enable Time \overline{BE}_A , \overline{BE}_B to An, Bn	4.75	1.5		6.8	ns
T _{PLZ} T _{PHZ}	Switch Disable Time \overline{BE}_A , \overline{BE}_B to An, Bn	4.75	1.5		6.0	ns

Note 6: All typical values are at V_{CC} = 5.0V, T_A = 25°C.


Note 7: This parameter is guaranteed by design but not tested. The bus switch contributes no propagation delay other than the RC delay of the On resistance of the switch and the load capacitance. The time constant for the switch and alone is of the order of 0.5 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Capacitance

(Note 8)


Symbol	Parameter	Typ	Max	Units	Conditions
C _{IN}	Control Input Capacitance	4	6	pF	V _{CC} = 5.0V
C _{I/O} (OFF)	Input/Output Capacitance	9	13	pF	V _{CC} = 5.0V

Note 8: Capacitance is characterized but not tested.

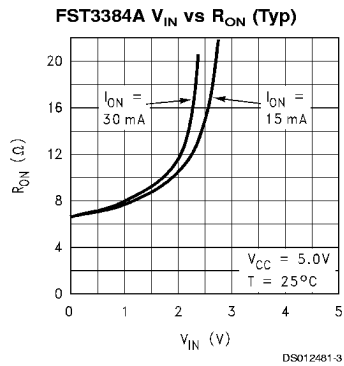





The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

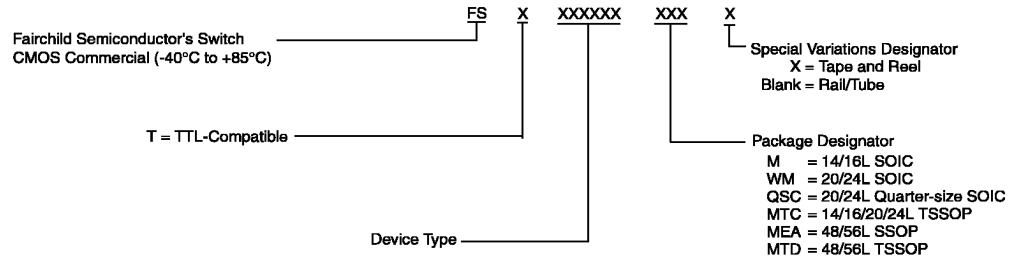

DS012481-4

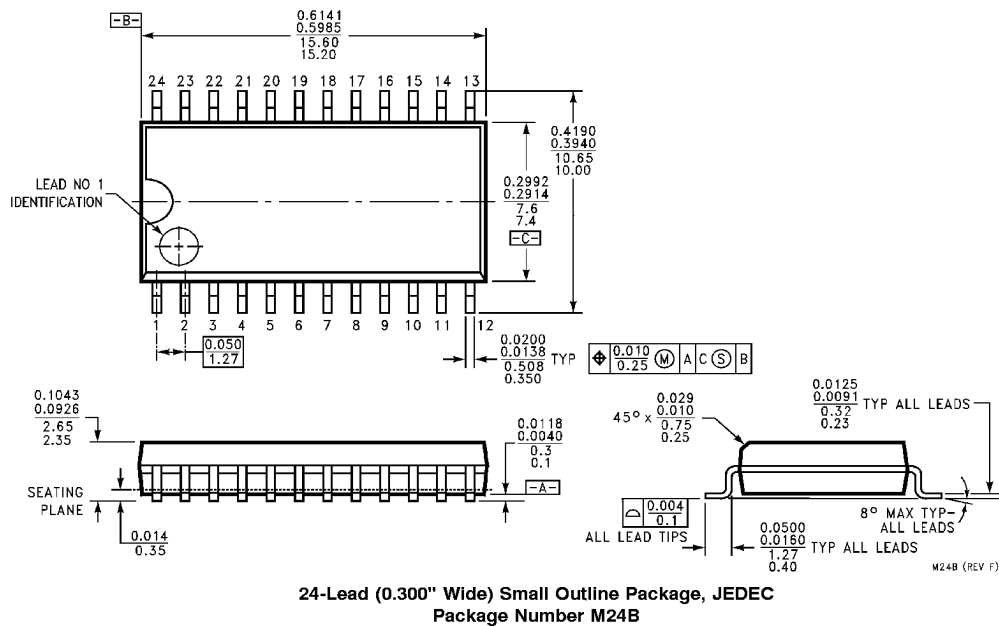Physical Dimensions inches (millimeters) unless otherwise noted


Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

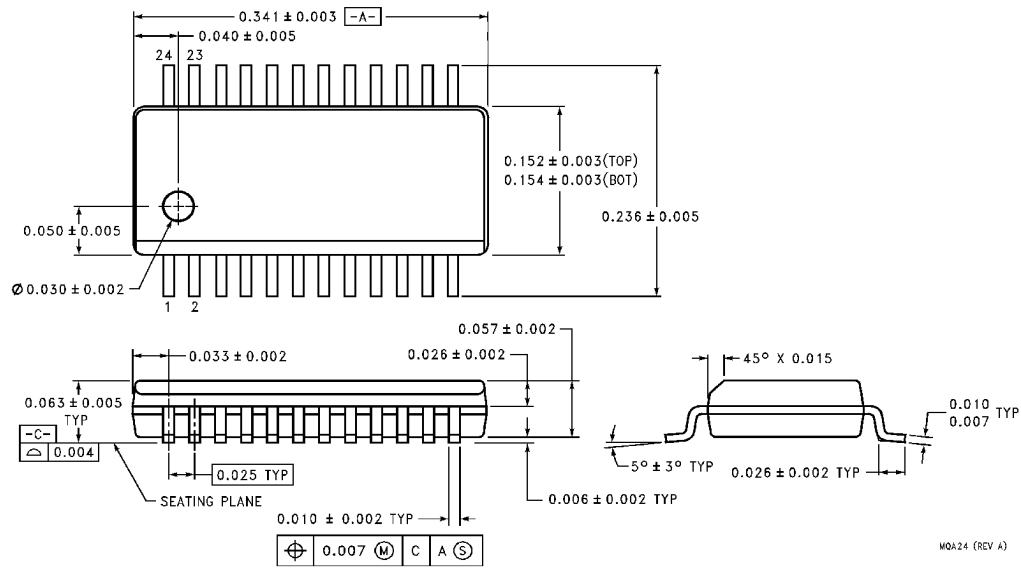

MQA24 (REV A)

24-Lead (0.150" Wide) Shrink Small Outline Package, JEDEC (QSC)
(also known as QSOP)
Package Number MQA24

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

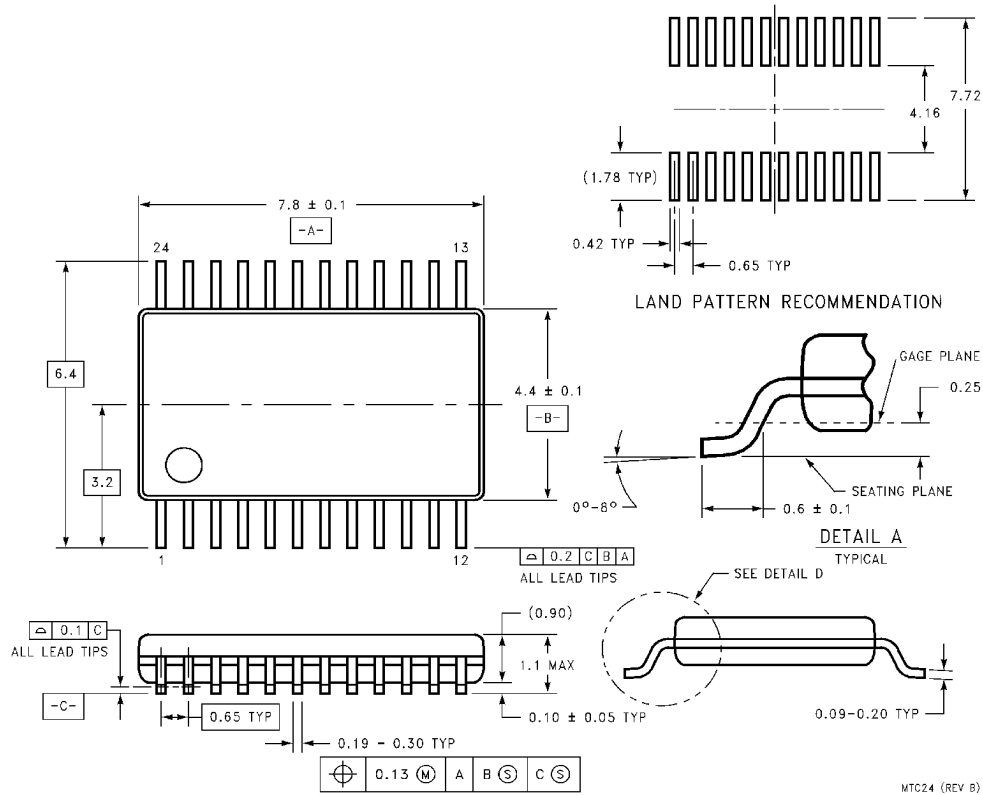

24-Lead Thin Small Outline Package, JEDEC (MTC)
Package Number MTC24

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor
Corporation
Americas
Customer Response Center
Tel: 1-888-522-5372

Fairchild Semiconductor
Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 8 141-35-0
English Tel: +44 (0) 1 793-85-68-56
Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor
Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: +852 2737-7200
Fax: +852 2314-0061

National Semiconductor
Japan Ltd.
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179

www.fairchildsemi.com

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.