

## DESIGNED TO MEET UL/CSA STANDARDS

### 5 x 20 mm Fast-Acting Type



- Designed to UL/CSA/ANCE 248 Standard.
- Available in Cartridge and Axial Lead Format.
- Available in ratings of 0.100 to 6 amperes.



#### ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Opening Time
110%	4 hours, <b>Minimum</b>
135%	1 hour, <b>Maximum</b>
200%	1 second, <b>Maximum</b>

**AGENCY APPROVALS:** Listed by Underwriters Laboratories and Certified by CSA. Approved by MITI from 1 through 5 amperes.

#### ORDERING INFORMATION:

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec.
235.100	236.100	.100	250	8.40	0.00160
235.125	236.125	.125	250	5.75	0.00280
235.200	236.200	.200	250	3.15	0.00890
235.250	236.250	.250	250	2.25	0.0170
235.300	236.300	.300	250	1.60	0.0330
235.400	236.400	.400	250	1.08	0.0600
235.500	236.500	.500	250	0.455	0.0710
235.600	236.600	.600	250	0.318	0.115
235.700	236.700	.700	250	0.263	0.160
235.800	236.800	.800	250	0.195	0.260
235.001	236.001	1	250	0.153	0.480
235.1.25	236.1.25	1.25	250	0.106	1.12
235.01.6	236.01.6	1.6	250	0.0775	2.08
235.002	236.002	2	250	0.0600	2.72
235.02.5	236.02.5	2.5	250	0.0438	5.59
235.003	236.003	3	250	0.0348	8.62
235.004	236.004	4	125	0.0248	17.60
235.005	236.005	5	125	0.0185	28.15
235.006	236.006	6	125	0.0150	48.60

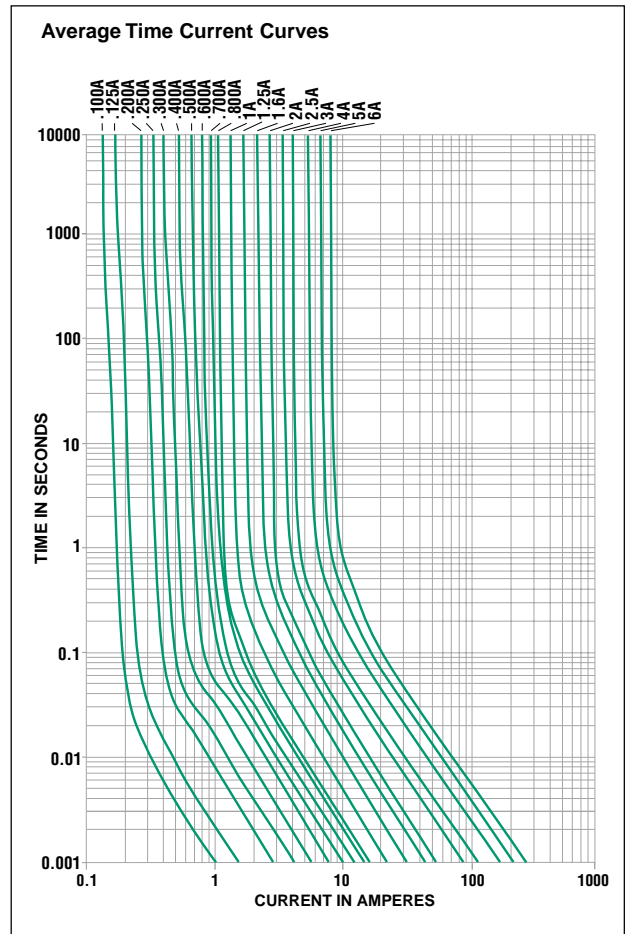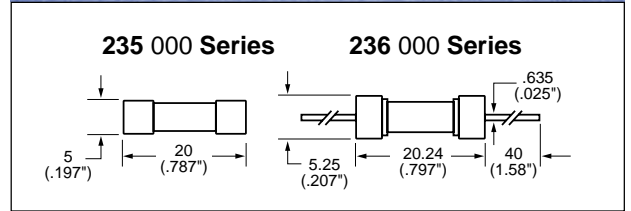

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.