


### Intellimod™ Modules Three Phase Converter IGBT Inverter Output 10 Amperes/1200 Volts

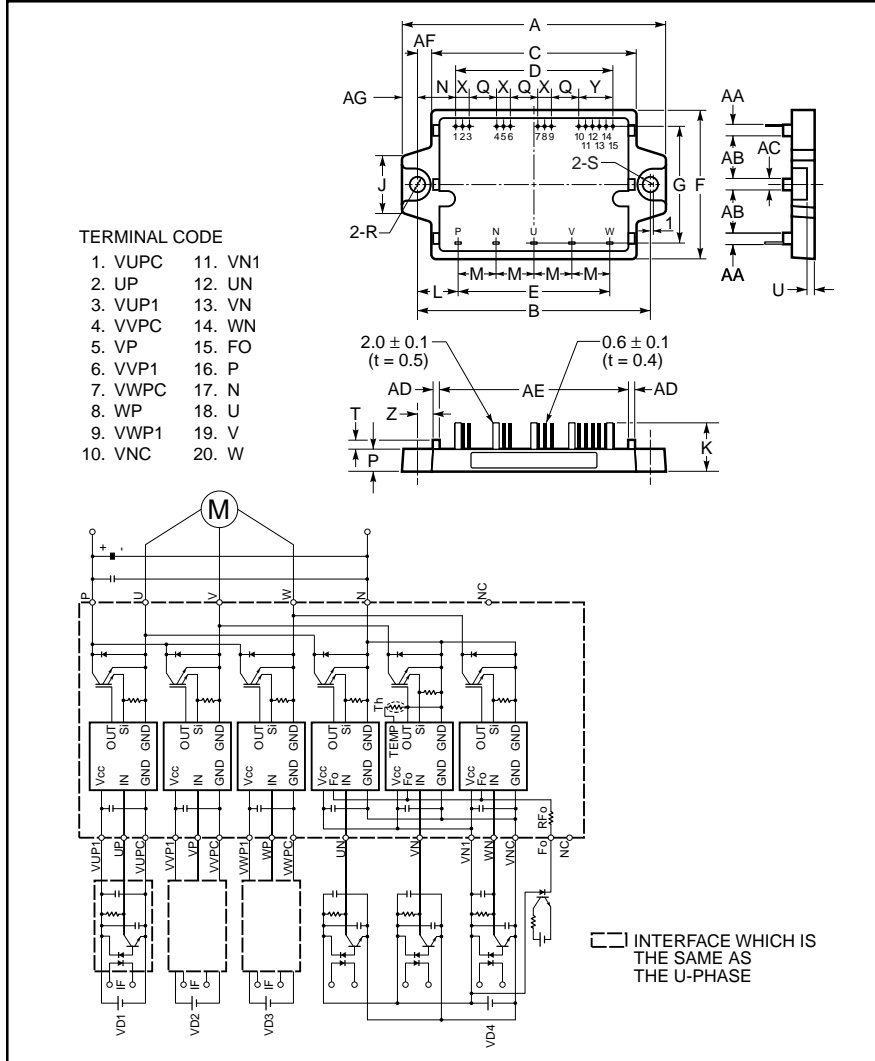

#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free wheel-diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over-Current
  - Over Temperature
  - Under Voltage

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the Complete part number from the table below -i.e. PM10CZF120 is a 1200V, 10 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.86±0.04	98.0±1.0
B	3.43±0.02	87.0±0.5
C	2.99	76.0
D	2.30	58.42
E	2.20±0.03	56.0±0.8
F	2.21±0.04	56.0±1.0
G	1.73±0.03	44.0±0.8
J	0.83	21.0
K	0.71±0.04	18.0±1.0
L	0.61	15.5
M	0.55±0.01	14.0±0.3
N	0.56	14.29
P	0.32±0.02	8.0±0.5
Q	0.40	10.16

Dimensions	Inches	Millimeters
R	0.22 Dia.	5.5 Dia.
S	0.24 Rad.	6.0 Rad.
T	0.14	3.5
U	0.12±0.02	3.0±0.5
X	0.1±0.01	2.54±0.3
Y	0.1±0.01	2.54±0.3
Z	0.24	6.0
AA	0.12	3.0
AB	0.69	17.5
AC	0.16	4.0
AD	0.10	2.5
AE	2.76	70.0
AF	0.22	5.5
AG	0.22	5.5

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	10	120



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM10CZF120**  
**Intellimod™ Modules**  
**Three Phase Converter IGBT Inverter Output**  
**10 Amperes/1200 Volts**

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM10CZF120	Units
Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque M5 Mounting Screws	-	17	in-lb
Module Weight (Typical)	-	80	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 \sim 16.5\text{V}$ , Inverter Part)	$V_{CC(prot)}$	800	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{RMS}$	2500	Volts

**Control Sector**

Supply Voltage Applied between ( $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $U_P$ , $V_P$ , $W_P$ , $U_N$ , $V_N$ , $W_N$ )	$V_{CIN}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_{NC}$ )	$V_{FO}$	20	Volts
Fault Output Current	$I_{FO}$	20	mA

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	1200	Volts
Collector Current, $\pm$	$I_C$	10	Amperes
Peak Collector Current, $\pm$	$I_{CP}$	20	Amperes
Supply Voltage (Applied between P-N)	$V_{CC}$	900	Volts
Supply Voltage, Surge (Applied between P-N,)	$V_{CC(surge)}$	1000	Volts
Collector Dissipation	$P_C$	62	Watts



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM10CZF120**  
**Intellimod™ Modules**  
**Three Phase Converter IGBT Inverter Output**  
**10 Amperes/1200 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	15	27	–	Amperes
Short Circuit Trip Level	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	–	41	–	Amperes
Over Current Delay Time	$t_{\text{off}}(\text{OC})$	$V_D = 15\text{V}$	–	10	–	$\mu\text{S}$
Over Temperature Protection	OT	Trip Level	100	110	120	$^\circ\text{C}$
	$\text{OT}_R$	Reset Level	–	90	–	$^\circ\text{C}$
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	$\text{UV}_R$	Reset Level	–	12.5	–	Volts
Supply Voltage	$V_D$	Applied between $V_{\text{UP}1}\text{-}V_{\text{UPC}}$ , $V_{\text{VP}1}\text{-}V_{\text{VPC}}$ , $V_{\text{WP}1}\text{-}V_{\text{WPC}}$ , $V_{\text{N}1}\text{-}V_{\text{NC}}$	13.5	15.0	16.5	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{N}1}\text{-}V_{\text{NC}}$	–	18	25	mA
		$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{XP}1}\text{-}V_{\text{XPC}}$	–	7	10	mA
Input ON Threshold Voltage	$V_{\text{CIN}(\text{on})}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN}(\text{off})}$	$U_P$ , $V_P$ , $W_P$ , $U_N$ , $V_N$ , $W_N$	1.7	2.0	2.3	Volts
PWM Input Frequency	$f_{\text{PWM}}$	3- $\emptyset$ Sinusoidal	–	15	20	kHz
Fault Output Current	$I_{\text{FO}(\text{H})}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	–	0.01	mA
	$I_{\text{FO}(\text{L})}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	10	15	mA
Minimum Fault Output Pulse Width	$t_{\text{FO}}$	$V_D = 15\text{V}$	1.0	1.8	–	mS



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM10CZF120**  
**Intellimod™ Modules**  
**Three Phase Converter IGBT Inverter Output**  
**10 Amperes/1200 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	-	-	10	mA
FwDi Forward Voltage	$V_{EC}$	$-I_C = 10A, V_D = 15V, V_{CIN} = 15V$	-	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 10A, T_j = 25^\circ\text{C}$	-	2.7	3.7	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 10A, T_j = 125^\circ\text{C}$	-	2.5	3.4	Volts
Inductive Load Switching Times	$t_{on}$		0.3	0.6	1.3	$\mu\text{S}$
	$t_{rr}$	$V_D = 15V, V_{CIN} = 0 \sim 15V,$	-	0.15	-	$\mu\text{S}$
	$t_{C(on)}$	$V_{CC} = 600V, I_C = 10A,$	-	0.3	1.0	$\mu\text{S}$
	$t_{off}$	$T_j = 125^\circ\text{C},$ Inductive Load	-	1.8	3.3	$\mu\text{S}$
	$t_{C(off)}$		-	0.8	1.5	$\mu\text{S}$

**Thermal Characteristics**

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	-	-	2.0	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each FwDi	-	-	5.5	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	-	-	0.067	$^\circ\text{C/Watt}$

**Recommended Conditions for Use**


Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 800	Volts
	$V_D$	Applied between $V_{UP1}-V_{UPC},$ $V_{N1}-V_{NC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}$	$15 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N$	$4.0 \sim V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	$\geq 3.0$	$\mu\text{S}$




Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM10CZF120**  
**Intellimod™ Modules**  
**Three Phase Converter IGBT Inverter Output**  
**10 Amperes/1200 Volts**


**SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

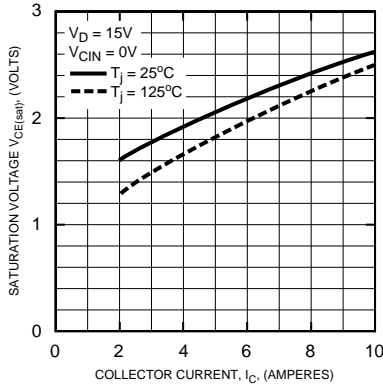


**COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

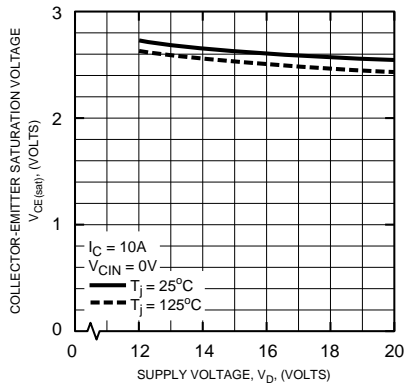


**OUTPUT CHARACTERISTICS (TYPICAL)**

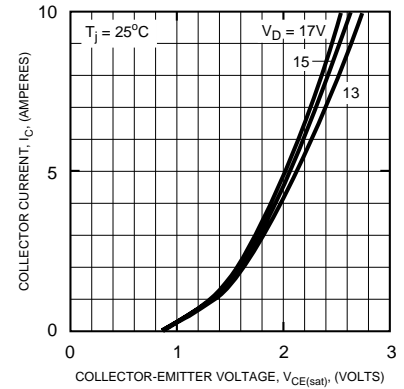


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

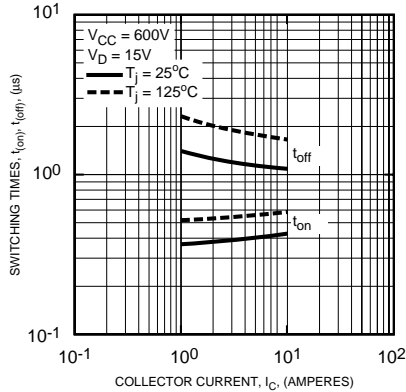


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

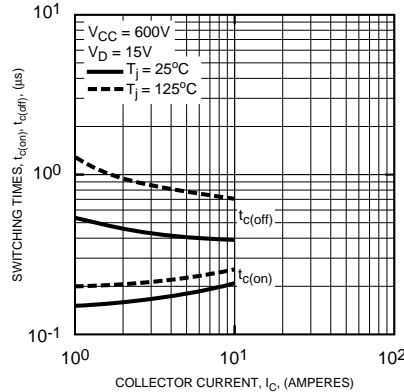

**REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)**

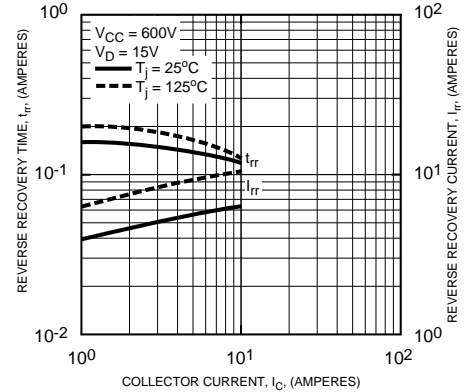

**FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)**

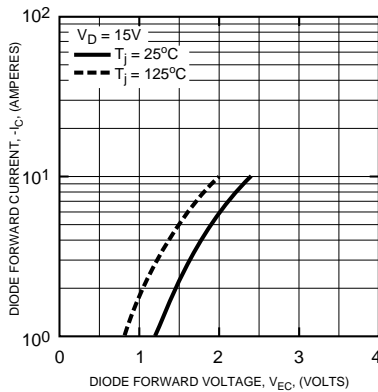

**PM10CZF120**  
**Intellimod™ Modules**  
**Three Phase Converter IGBT Inverter Output**  
 10 Amperes/1200 Volts

