


The RF Line  
**NPN Silicon**  
**Low Noise, High-Frequency**  
**Transistors**

Designed for use in high gain, low noise small-signal amplifiers. This series features excellent broadband linearity and is offered in a variety of packages.


- Fully Implanted Base and Emitter Structure
- 9 Finger, 1.25 Micron Geometry with Gold Top Metal
- Gold Sintered Back Metal
- Available in tape and reel packaging options:
  - T1 suffix = 3,000 units per reel
  - T3 suffix = 10,000 units per reel

**MMBR941**  
**MRF947**  
**MRF9411**  
**SERIES**


$I_C = 50 \text{ mA}$   
**LOW NOISE**  
**HIGH-FREQUENCY**  
**TRANSISTORS**



**CASE 318-08, STYLE 6**  
**SOT-23**  
**LOW PROFILE**  
**MMBR941LT1, T3, MMBR941BLT1**



**CASE 419-02, STYLE 3**  
**MRF947AT1, MRF947BT1,**  
**MRF947T1, T3**



**CASE 318A-05, STYLE 1**  
**SOT-143**  
**LOW PROFILE**  
**MRF9411LT1**



## MAXIMUM RATINGS

| Rating   | Symbol                | MMBR941LT1, T3 | MRF9411LT1   | MRF947 Series | Unit                          |
|--|-----------------------|----------------|--------------|---------------|-------------------------------|
| Collector–Emitter Voltage  | $V_{CEO}$             | 10             | 10           | 10            | Vdc                           |
| Collector–Base Voltage   | $V_{CBO}$             | 20             | 20           | 20            | Vdc                           |
| Emitter–Base Voltage   | $V_{EBO}$             | 1.5            | 1.5          | 1.5           | Vdc                           |
| Power Dissipation (1) $T_C = 75^\circ\text{C}$<br>Derate linearly above $T_{\text{case}} = 75^\circ\text{C}$ @ | $P_{D\text{max}}$     | 0.25<br>3.33   | 0.25<br>3.33 | 0.188<br>2.5  | Watts<br>mW/ $^\circ\text{C}$ |
| Collector Current — Continuous (2)   | $I_C$                 | 50             | 50           | 50            | mA                            |
| Maximum Junction Temperature   | $T_{J\text{max}}$     | 150            | 150          | 150           | $^\circ\text{C}$              |
| Storage Temperature  | $T_{\text{stg}}$      | –55 to +150    | –55 to +150  | –55 to +150   | $^\circ\text{C}$              |
| Thermal Resistance,<br>Junction to Case  | $R_{\theta\text{JC}}$ | 300            | 300          | 400           | $^\circ\text{C}/\text{W}$     |

## DEVICE MARKING

|                                    |                                   |                  |               |
|------------------------------------|-----------------------------------|------------------|---------------|
| MMBR941LT1 = 7Y<br>MRF9411LT1 = 10 | MMBR941BLT1 = 7N<br>MRF947AT1 = G | MRF947T1, T3 = A | MRF947BT1 = H |
|------------------------------------|-----------------------------------|------------------|---------------|

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS (3)

|  |     |                             |    |    |     |                 |
|--|-----|-----------------------------|----|----|-----|-----------------|
| Collector–Emitter Breakdown Voltage<br>( $I_C = 0.1\text{ mA}$ , $I_B = 0$ ) | All | $V_{(\text{BR})\text{CEO}}$ | 10 | 12 | —   | Vdc             |
| Collector–Base Breakdown Voltage<br>( $I_C = 0.1\text{ mA}$ , $I_E = 0$ )    | All | $V_{(\text{BR})\text{CBO}}$ | 20 | 23 | —   | Vdc             |
| Emitter Cutoff Current<br>( $V_{EB} = 1.0\text{ V}$ , $I_C = 0$ )            | All | $I_{EBO}$                   | —  | —  | 0.1 | $\mu\text{Adc}$ |
| Collector Cutoff Current<br>( $V_{CB} = 10\text{ V}$ , $I_E = 0$ )           | All | $I_{CBO}$                   | —  | —  | 0.1 | $\mu\text{Adc}$ |

### ON CHARACTERISTICS (3)

|  |  |                                     |                 |             |                 |   |
|--|--|-------------------------------------|-----------------|-------------|-----------------|---|
| DC Current Gain<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ ) (MMBR941LT1, MRF9411LT1)<br>(MMBR941BLT1) |  | $h_{FE}$                            | 50<br>100       | —<br>—      | 200<br>200      | — |
| DC Current Gain ( $V_{CE} = 1.0\text{ V}$ , $I_C = 500\text{ }\mu\text{A}$ )                                     | MRF947T1, MRF947BT1                    | $h_{FE1}$                           | 50              | —           | —               | — |
| DC Current Gain<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ )   | MRF947T1, T3<br>MRF947AT1<br>MRF947BT1 | $h_{FE2}$<br>$h_{FE3}$<br>$h_{FE4}$ | 50<br>75<br>100 | —<br>—<br>— | —<br>150<br>200 | — |

### DYNAMIC CHARACTERISTICS

|   |     |          |   |      |   |     |
|---|-----|----------|---|------|---|-----|
| Collector–Base Capacitance<br>( $V_{CB} = 10\text{ V}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )                   | All | $C_{cb}$ | — | 0.35 | — | pF  |
| Current Gain — Bandwidth Product<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1.0\text{ GHz}$ ) | All | $f_T$    | — | 8.0  | — | GHz |

#### NOTE:

- To calculate the junction temperature use  $T_J = P_D \times R_{\theta\text{JC}} + T_{\text{CASE}}$ . Case temperature measured on collector lead immediately adjacent to body of package.
- $I_C$  — Continuous (MTBF  $\approx 10$  years).
- Pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$  pulsed.


**PERFORMANCE CHARACTERISTICS**

| Conditions   | Symbol             | MRF9411LT1 |     |     | MMBR941LT1, T3 |     |     | MRF947 Series |      |     | Unit |
|--|--------------------|------------|-----|-----|----------------|-----|-----|---------------|------|-----|------|
|  |                    | Min        | Typ | Max | Min            | Typ | Max | Min           | Typ  | Max |      |
| Insertion Gain<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1.0\text{ GHz}$ )<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 2.0\text{ GHz}$ )                             | $ S_{21} ^2$       | —          | 16  | —   | —              | 14  | —   | —             | 14   | —   | dB   |
| Maximum Unilateral Gain (1)<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 1.0\text{ GHz}$ )<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 15\text{ mA}$ , $f = 2.0\text{ GHz}$ )                | $G_{U\text{ max}}$ | —          | 18  | —   | —              | 16  | —   | —             | 14.8 | —   | dB   |
| Noise Figure — Minimum (Figure 9)<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ )<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ , $f = 2.0\text{ GHz}$ )        | NF <sub>MIN</sub>  | —          | 1.5 | —   | —              | 1.5 | —   | —             | 1.5  | —   | dB   |
| Associated Gain at Minimum NF (Figure 9)<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ )<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ , $f = 2.0\text{ GHz}$ ) | $G_{NF}$           | —          | 15  | —   | —              | 14  | —   | —             | 14   | —   | dB   |
| Noise Figure — 50 ohm Source<br>( $V_{CE} = 6.0\text{ V}$ , $I_C = 5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ )   | NF <sub>50 Ω</sub> | —          | 1.9 | 2.8 | —              | 1.9 | 2.8 | —             | 1.9  | 2.8 | dB   |


NOTE:

1. Maximum Unilateral Gain is  $G_{U\text{ max}} = \frac{|S_{21}|^2}{(1-|S_{11}|^2)(1-|S_{22}|^2)}$


**TYPICAL CHARACTERISTICS**  
**MMBR941LT1, T3; MMBR941BLT1; MRF9411LT1; MRF9411BLT1**

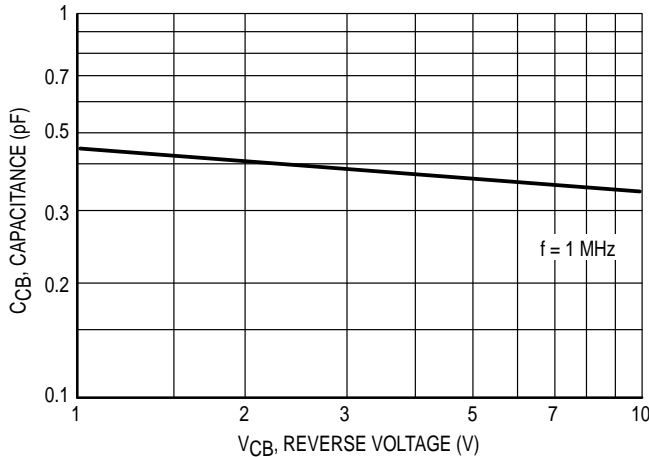


**Figure 1. Collector-Base Capacitance versus Voltage**

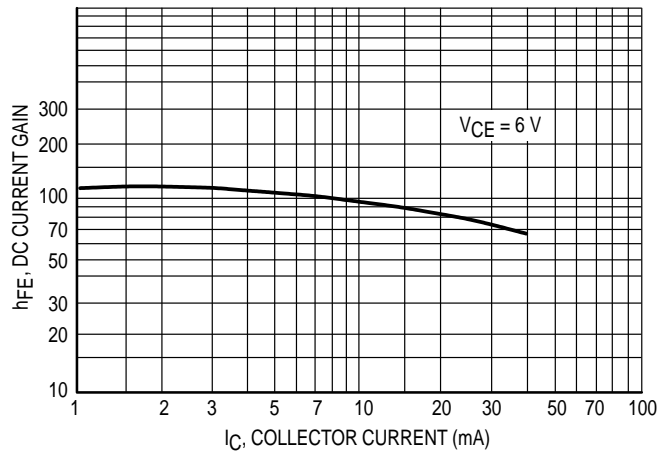

**Figure 2. DC Current Gain versus Collector Current**

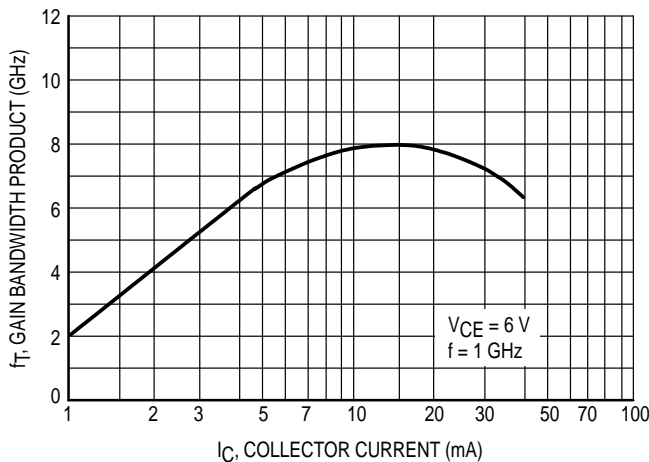


**Figure 3. Gain Bandwidth Product versus Collector Current**

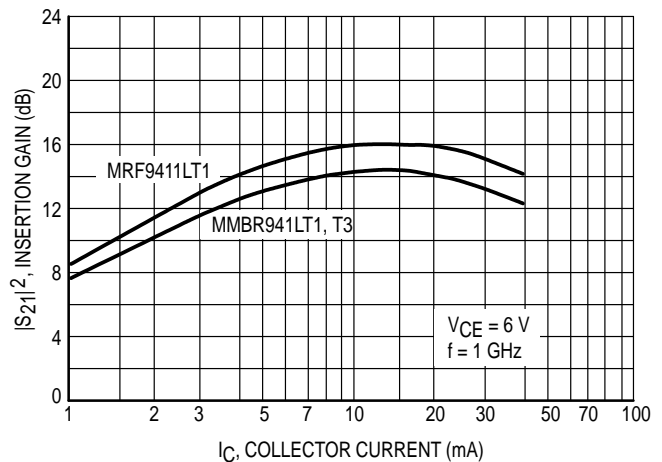


**Figure 4. Insertion Gain versus Collector Current**


## FORWARD INSERTION GAIN AND MAXIMUM UNILATERAL GAIN versus FREQUENCY

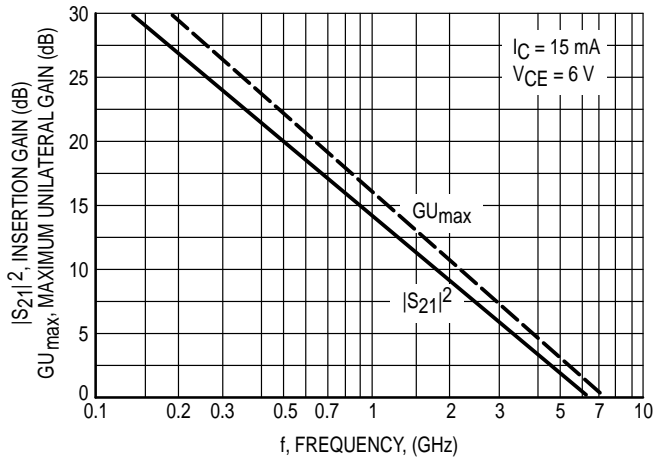


**Figure 5. MMBR941LT1, T3**

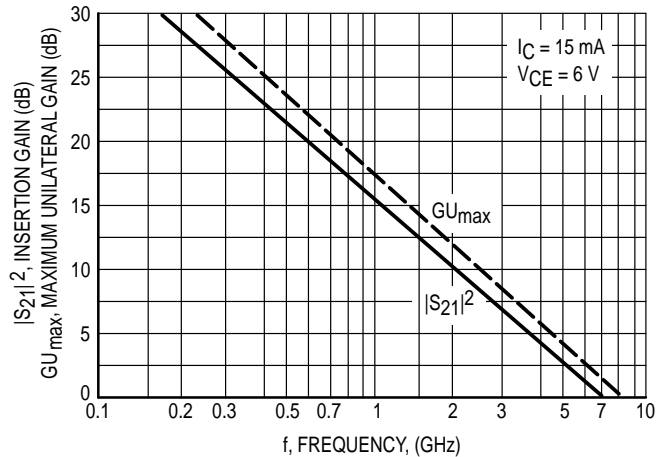


**Figure 6. MRF9411LT1**

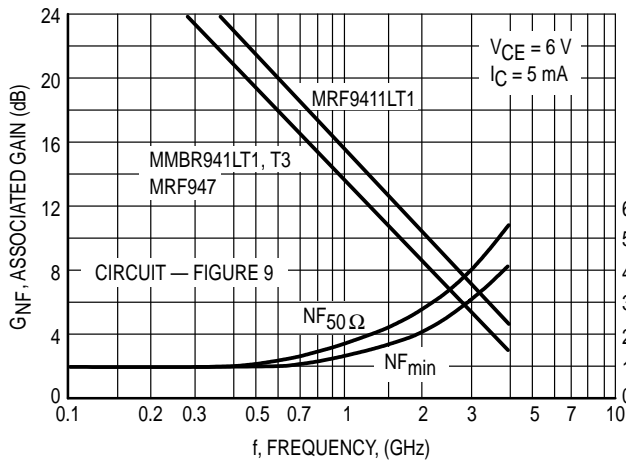

**Figure 7. Noise Figure and Associated Gain  
versus Frequency**

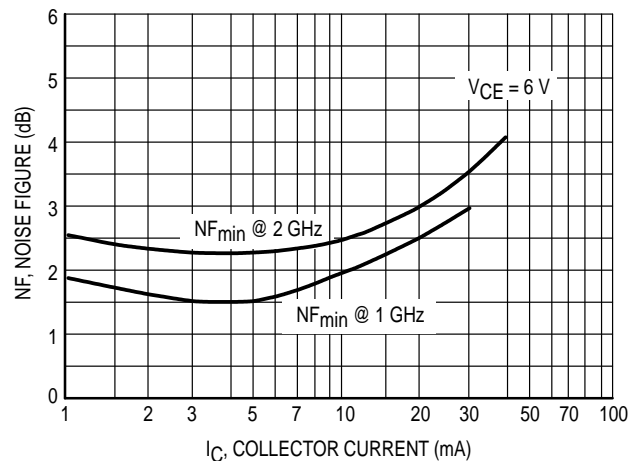

**Figure 8. Minimum Noise Figure versus  
Collector Current**

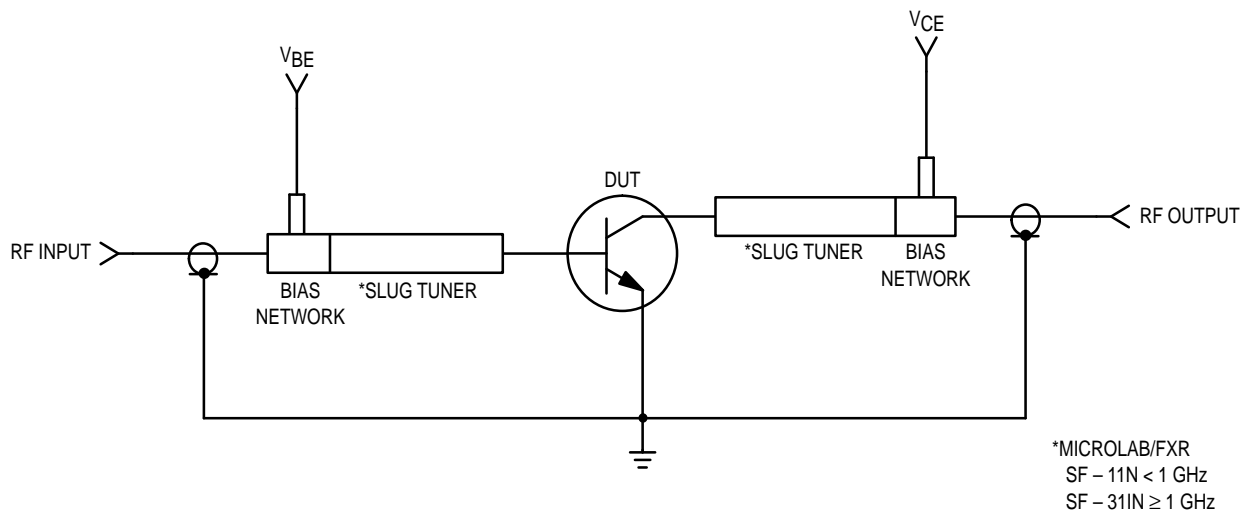

**Figure 9. Functional Circuit Schematic (all devices)**

TYPICAL CHARACTERISTICS  
MRF947 SERIES

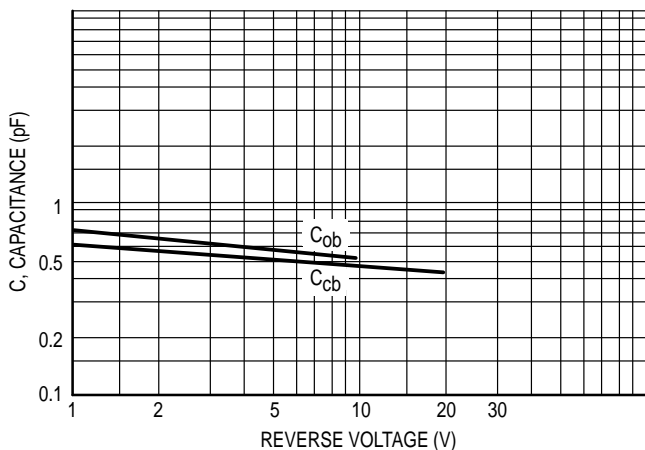


Figure 10. Capacitance versus Voltage

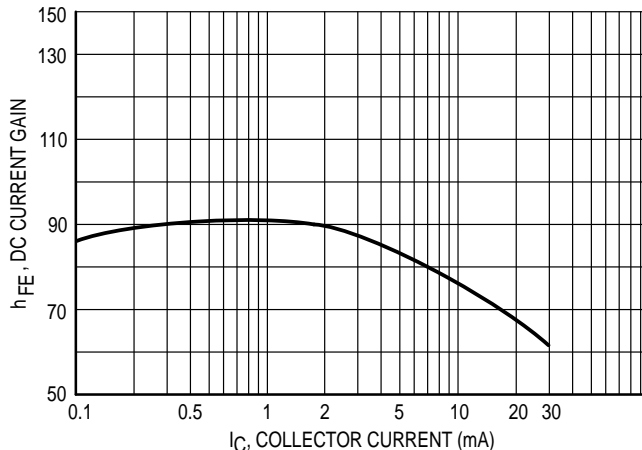


Figure 11. DC Current Gain versus Collector Current

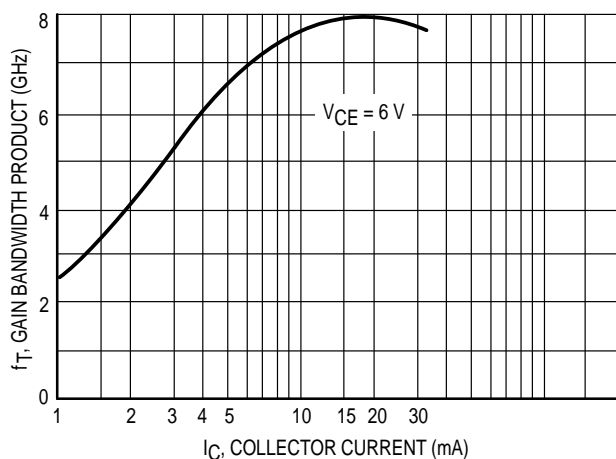


Figure 12. Gain-Bandwidth Product versus Collector Current

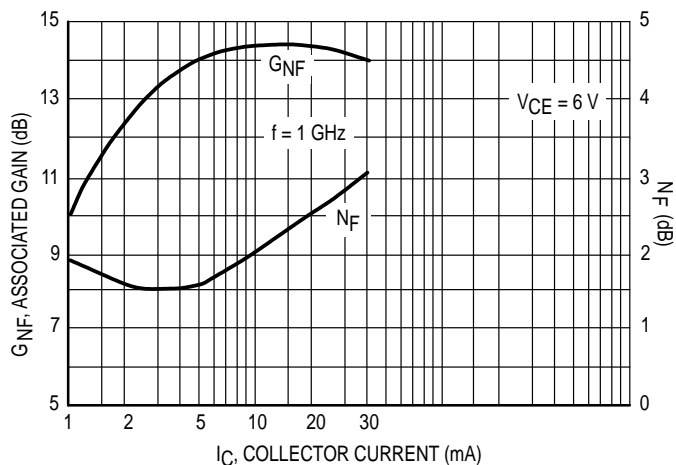


Figure 13. Associated Gain and Minimum Noise Figure versus Collector Current

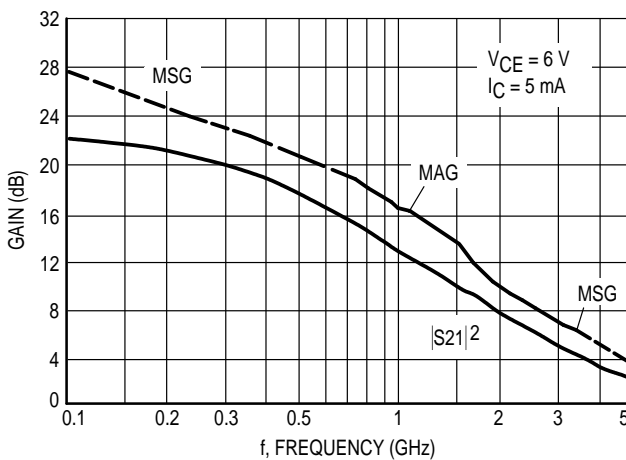


Figure 14. Forward Insertion Gain and Maximum Stable/Available Power Gain versus Frequency

| V <sub>CE</sub><br>(Volts) | I <sub>C</sub><br>(mA) | f<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |      | S <sub>12</sub> |      | S <sub>22</sub> |      |     |
|----------------------------|------------------------|------------|-----------------|------|-----------------|------|-----------------|------|-----------------|------|-----|
|                            |                        |            | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ   |     |
| 1.0                        | 0.5                    | 100        | 0.97            | -11  | 1.78            | 170  | 0.03            | 83   | 0.99            | -4.7 |     |
|                            |                        | 200        | 0.96            | -22  | 1.74            | 161  | 0.06            | 76   | 0.99            | -9.1 |     |
|                            |                        | 500        | 0.90            | -53  | 1.60            | 133  | 0.13            | 56   | 0.93            | -21  |     |
|                            |                        | 900        | 0.75            | -89  | 1.37            | 105  | 0.18            | 37   | 0.83            | -33  |     |
|                            |                        | 1000       | 0.72            | -98  | 1.32            | 100  | 0.18            | 33   | 0.82            | -36  |     |
|                            |                        | 1500       | 0.63            | -132 | 1.07            | 74   | 0.19            | 20   | 0.75            | -47  |     |
|                            |                        | 2000       | 0.57            | -163 | 0.89            | 55   | 0.16            | 15   | 0.72            | -57  |     |
|                            |                        | 3000       | 0.55            | 144  | 0.67            | 30   | 0.15            | 40   | 0.71            | -76  |     |
|                            | 1.0                    | 100        | 0.95            | -13  | 3.37            | 169  | 0.03            | 81   | 0.99            | -6.2 |     |
|                            |                        | 200        | 0.93            | -27  | 3.27            | 158  | 0.06            | 73   | 0.98            | -12  |     |
|                            |                        | 500        | 0.81            | -62  | 2.85            | 128  | 0.12            | 52   | 0.86            | -26  |     |
|                            |                        | 900        | 0.63            | -101 | 2.21            | 101  | 0.15            | 37   | 0.73            | -38  |     |
|                            |                        | 1000       | 0.60            | -110 | 2.08            | 96   | 0.15            | 34   | 0.71            | -40  |     |
|                            |                        | 1500       | 0.51            | -144 | 1.59            | 73   | 0.16            | 27   | 0.64            | -49  |     |
| 2000                       |                        | 0.46       | -173            | 1.28 | 56              | 0.16 | 29              | 0.61 | -58             |      |     |
| 3000                       |                        | 0.46       | 138             | 0.95 | 30              | 0.19 | 44              | 0.60 | -75             |      |     |
| 6.0                        | 5.0                    | 100        | 0.82            | -25  | 14.6            | 159  | 0.02            | 77   | 0.94            | -13  |     |
|                            |                        | 200        | 0.75            | -47  | 12.6            | 142  | 0.04            | 68   | 0.85            | -22  |     |
|                            |                        | 400        | 0.55            | -79  | 9.2             | 120  | 0.05            | 61   | 0.69            | -31  |     |
|                            |                        | 600        | 0.42            | -98  | 6.9             | 106  | 0.07            | 60   | 0.60            | -32  |     |
|                            |                        | 800        | 0.33            | -114 | 5.3             | 97   | 0.08            | 61   | 0.56            | -33  |     |
|                            |                        | 1000       | 0.28            | -129 | 4.5             | 90   | 0.09            | 62   | 0.52            | -33  |     |
|                            |                        | 1500       | 0.25            | -155 | 3.1             | 77   | 0.13            | 67   | 0.51            | -37  |     |
|                            |                        | 2000       | 0.16            | 176  | 2.4             | 66   | 0.16            | 68   | 0.51            | -36  |     |
|                            |                        | 2500       | 0.21            | 151  | 2.0             | 57   | 0.20            | 69   | 0.48            | -40  |     |
|                            |                        | 3000       | 0.18            | 122  | 1.7             | 50   | 0.23            | 68   | 0.48            | -44  |     |
|                            |                        | 3500       | 0.30            | 108  | 1.5             | 42   | 0.27            | 66   | 0.45            | -46  |     |
|                            |                        | 4000       | 0.29            | 91   | 1.4             | 37   | 0.32            | 64   | 0.42            | -53  |     |
|                            |                        | 10         | 100             | 0.67 | -37             | 23.5 | 149             | 0.02 | 74              | 0.88 | -18 |
|                            |                        |            | 200             | 0.54 | -64             | 18.1 | 129             | 0.03 | 68              | 0.73 | -28 |
|                            | 400                    |            | 0.37            | -96  | 11.3            | 108  | 0.05            | 67   | 0.56            | -31  |     |
|                            | 600                    |            | 0.26            | -114 | 8.0             | 98   | 0.06            | 67   | 0.50            | -30  |     |
|                            | 800                    |            | 0.21            | -130 | 6.0             | 91   | 0.08            | 70   | 0.47            | -30  |     |
|                            | 1000                   |            | 0.18            | -147 | 5.1             | 85   | 0.09            | 70   | 0.45            | -30  |     |
|                            | 1500                   |            | 0.18            | -167 | 3.4             | 74   | 0.13            | 72   | 0.46            | -34  |     |
|                            | 2000                   |            | 0.11            | 159  | 2.6             | 64   | 0.17            | 71   | 0.46            | -34  |     |
|                            | 2500                   |            | 0.17            | 140  | 2.2             | 56   | 0.21            | 69   | 0.44            | -38  |     |
|                            | 3000                   |            | 0.15            | 107  | 1.8             | 59   | 0.25            | 67   | 0.45            | -41  |     |
|                            | 15                     | 100        | 0.56            | -46  | 28.6            | 143  | 0.02            | 73   | 0.83            | -22  |     |
|                            |                        | 200        | 0.43            | -75  | 20.2            | 122  | 0.03            | 67   | 0.65            | -30  |     |
|                            |                        | 400        | 0.29            | -107 | 11.8            | 104  | 0.04            | 70   | 0.50            | -30  |     |
|                            |                        | 600        | 0.22            | -125 | 8.2             | 95   | 0.06            | 74   | 0.46            | -28  |     |
|                            |                        | 800        | 0.18            | -141 | 6.2             | 88   | 0.08            | 74   | 0.45            | -27  |     |
|                            |                        | 1000       | 0.16            | -158 | 5.1             | 83   | 0.09            | 74   | 0.43            | -28  |     |
|                            |                        | 1500       | 0.17            | -174 | 3.4             | 72   | 0.13            | 73   | 0.44            | -32  |     |
|                            |                        | 2000       | 0.11            | 150  | 2.6             | 63   | 0.17            | 72   | 0.45            | -33  |     |
|                            |                        | 2500       | 0.17            | 138  | 2.2             | 55   | 0.21            | 70   | 0.43            | -37  |     |
|                            |                        | 3000       | 0.15            | 102  | 1.9             | 49   | 0.25            | 67   | 0.44            | -39  |     |
| 3500                       |                        | 0.28       | 98              | 1.7  | 42              | 0.29 | 65              | 0.40 | -41             |      |     |
| 4000                       |                        | 0.25       | 82              | 1.5  | 37              | 0.32 | 61              | 0.38 | -47             |      |     |

Table 1. MMBR941LT1, T3 Common Emitter S-Parameters

| VCE<br>(Volts) | I <sub>C</sub><br>(mA) | f<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |     | S <sub>12</sub> |    | S <sub>22</sub> |     |
|----------------|------------------------|------------|-----------------|------|-----------------|-----|-----------------|----|-----------------|-----|
|                |                        |            | Mag             | ∠φ   | Mag             | ∠φ  | Mag             | ∠φ | Mag             | ∠φ  |
| 6.0            | 20                     | 100        | 0.49            | -52  | 31.5            | 139 | 0.01            | 70 | 0.79            | -23 |
|                |                        | 200        | 0.36            | -84  | 21.1            | 118 | 0.02            | 69 | 0.60            | -29 |
|                |                        | 400        | 0.25            | -115 | 12.1            | 101 | 0.04            | 73 | 0.48            | -29 |
|                |                        | 600        | 0.20            | -134 | 8.3             | 93  | 0.06            | 74 | 0.45            | -26 |
|                |                        | 800        | 0.16            | -150 | 6.2             | 87  | 0.07            | 75 | 0.44            | -26 |
|                |                        | 1000       | 0.15            | -166 | 5.1             | 82  | 0.09            | 75 | 0.42            | -26 |
|                |                        | 1500       | 0.16            | -176 | 3.5             | 75  | 0.14            | 74 | 0.44            | -31 |
|                |                        | 2000       | 0.12            | 144  | 2.6             | 63  | 0.17            | 73 | 0.45            | -32 |
|                |                        | 2500       | 0.17            | 133  | 2.2             | 55  | 0.22            | 70 | 0.43            | -36 |
|                |                        | 3000       | 0.16            | 101  | 1.9             | 49  | 0.25            | 68 | 0.44            | -39 |
|                |                        | 3500       | 0.28            | 98   | 1.6             | 41  | 0.29            | 65 | 0.41            | -40 |
|                |                        | 4000       | 0.26            | 82   | 1.5             | 36  | 0.33            | 61 | 0.39            | -47 |
|                | 30                     | 100        | 0.41            | -65  | 34.3            | 134 | 0.01            | 70 | 0.74            | -25 |
|                |                        | 200        | 0.30            | -99  | 21.6            | 113 | 0.02            | 70 | 0.56            | -28 |
|                |                        | 400        | 0.23            | -131 | 11.9            | 98  | 0.04            | 76 | 0.47            | -25 |
|                |                        | 600        | 0.20            | -147 | 8.1             | 91  | 0.06            | 76 | 0.45            | -24 |
|                |                        | 800        | 0.18            | -163 | 6.1             | 84  | 0.07            | 78 | 0.44            | -23 |
|                |                        | 1000       | 0.17            | -177 | 5.0             | 80  | 0.09            | 78 | 0.43            | -24 |
|                |                        | 1500       | 0.18            | 174  | 3.4             | 70  | 0.13            | 76 | 0.45            | -30 |
|                |                        | 2000       | 0.14            | 141  | 2.5             | 61  | 0.17            | 74 | 0.47            | -31 |
|                |                        | 2500       | 0.20            | 131  | 2.1             | 54  | 0.21            | 71 | 0.45            | -36 |
|                |                        | 3000       | 0.18            | 104  | 1.8             | 47  | 0.25            | 69 | 0.46            | -39 |
|                |                        | 3500       | 0.31            | 100  | 1.6             | 40  | 0.29            | 65 | 0.42            | -42 |
|                |                        | 4000       | 0.29            | 84   | 1.5             | 35  | 0.33            | 62 | 0.40            | -48 |

Table 1. MMBR941LT1, T3 Common Emitter S-Parameters (continued)

| VCE<br>(Volts) | I <sub>C</sub><br>(mA) | f<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |      | S <sub>12</sub> |      | S <sub>22</sub> |      |
|----------------|------------------------|------------|-----------------|------|-----------------|------|-----------------|------|-----------------|------|
|                |                        |            | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ   |
| 1.0            | 0.5                    | 100        | 0.97            | -10  | 1.78            | 171  | 0.03            | 83   | 100             | -4.7 |
|                |                        | 200        | 0.97            | -20  | 1.75            | 163  | 0.05            | 77   | 100             | -9.2 |
|                |                        | 500        | 0.93            | -49  | 1.62            | 137  | 0.12            | 57   | 0.94            | -21  |
|                |                        | 900        | 0.81            | -84  | 1.43            | 110  | 0.18            | 36   | 0.86            | -35  |
|                |                        | 1000       | 0.79            | -92  | 1.38            | 104  | 0.19            | 32   | 0.84            | -38  |
|                |                        | 1500       | 0.72            | -125 | 1.12            | 78   | 0.20            | 14   | 0.77            | -50  |
|                |                        | 2000       | 0.68            | -152 | 0.92            | 57   | 0.20            | 1    | 0.74            | -61  |
|                |                        | 3000       | 0.66            | 169  | 0.68            | 27   | 0.16            | -11  | 0.73            | -82  |
|                |                        | 1.0        | 100             | 0.95 | -13             | 3.37 | 170             | 0.03 | 82              | 0.99 |
|                | 200                    |            | 0.94            | -25  | 3.30            | 161  | 0.05            | 74   | 0.98            | -12  |
|                | 500                    |            | 0.88            | -59  | 2.96            | 133  | 0.16            | 53   | 0.89            | -27  |
|                | 1000                   |            | 0.70            | -107 | 2.26            | 101  | 0.16            | 29   | 0.74            | -44  |
|                | 1500                   |            | 0.64            | -139 | 1.72            | 78   | 0.17            | 15   | 0.66            | -55  |
|                | 2000                   |            | 0.61            | -165 | 1.36            | 59   | 0.17            | 6.7  | 0.62            | -65  |
|                | 3000                   |            | 0.61            | 160  | 0.97            | 32   | 0.14            | 3.0  | 0.61            | -84  |

Table 2. MRF9411LT1 Common Emitter S-Parameters

| VCE<br>(Volts) | IC<br>(mA) | f<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |      | S <sub>12</sub> |      | S <sub>22</sub> |     |
|----------------|------------|------------|-----------------|------|-----------------|------|-----------------|------|-----------------|-----|
|                |            |            | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ   | Mag             | ∠φ  |
| 6.0            | 5.0        | 100        | 0.73            | -24  | 14              | 164  | 0.02            | 92   | 0.96            | -11 |
|                |            | 200        | 0.74            | -47  | 12.9            | 150  | 0.03            | 65   | 0.90            | -20 |
|                |            | 400        | 0.66            | -83  | 10.4            | 129  | 0.05            | 56   | 0.75            | -32 |
|                |            | 600        | 0.62            | -108 | 8.4             | 115  | 0.06            | 45   | 0.65            | -40 |
|                |            | 800        | 0.56            | -127 | 6.7             | 105  | 0.07            | 46   | 0.60            | -43 |
|                |            | 1000       | 0.54            | -141 | 5.6             | 96   | 0.07            | 51   | 0.57            | -46 |
|                |            | 1500       | 0.46            | -166 | 3.9             | 82   | 0.08            | 55   | 0.52            | -50 |
|                |            | 2000       | 0.43            | 172  | 2.9             | 70   | 0.09            | 56   | 0.50            | -54 |
|                |            | 2500       | 0.41            | 151  | 2.3             | 62   | 0.11            | 61   | 0.48            | -60 |
|                |            | 3000       | 0.44            | 128  | 1.9             | 55   | 0.14            | 62   | 0.49            | -65 |
|                |            | 3500       | 0.49            | 117  | 1.6             | 47   | 0.15            | 61   | 0.46            | -74 |
|                |            | 4000       | 0.57            | 101  | 1.4             | 42   | 0.16            | 62   | 0.47            | -81 |
|                | 5000       | 0.60       | 92              | 1.2  | 32              | 0.21 | 60              | 0.46 | -105            |     |
|                | 6000       | 0.58       | 88              | 1.0  | 20              | 0.25 | 61              | 0.51 | -137            |     |
|                | 10         | 100        | 0.64            | -39  | 23.6            | 157  | 0.01            | 59   | 0.91            | -16 |
|                |            | 200        | 0.60            | -71  | 20              | 139  | 0.02            | 70   | 0.80            | -27 |
|                |            | 400        | 0.54            | -112 | 13.9            | 117  | 0.03            | 57   | 0.61            | -39 |
|                |            | 600        | 0.52            | -135 | 10.3            | 104  | 0.04            | 50   | 0.51            | -43 |
|                |            | 800        | 0.49            | -151 | 8.0             | 96   | 0.05            | 54   | 0.46            | -44 |
|                |            | 1000       | 0.47            | -161 | 6.5             | 89   | 0.06            | 60   | 0.46            | -46 |
|                |            | 1500       | 0.41            | 177  | 4.4             | 77   | 0.08            | 62   | 0.44            | -47 |
|                |            | 2000       | 0.40            | 158  | 3.2             | 67   | 0.09            | 65   | 0.43            | -52 |
|                |            | 2500       | 0.39            | 139  | 2.6             | 60   | 0.11            | 68   | 0.41            | -56 |
|                |            | 3000       | 0.44            | 118  | 2.1             | 53   | 0.13            | 69   | 0.43            | -62 |
|                |            | 3500       | 0.49            | 110  | 1.8             | 47   | 0.15            | 67   | 0.39            | -72 |
|                |            | 4000       | 0.54            | 96   | 1.6             | 42   | 0.18            | 65   | 0.41            | -78 |
|                | 5000       | 0.63       | 88              | 1.3  | 32              | 0.23 | 61              | 0.40 | -101            |     |
|                | 6000       | 0.58       | 86              | 1.1  | 20              | 0.26 | 62              | 0.44 | -136            |     |
|                | 15         | 100        | 0.56            | -51  | 29.5            | 152  | 0.01            | 78   | 0.87            | -20 |
|                |            | 200        | 0.53            | -88  | 23.5            | 131  | 0.02            | 63   | 0.73            | -31 |
|                |            | 400        | 0.51            | -128 | 15.1            | 111  | 0.03            | 63   | 0.54            | -40 |
|                |            | 600        | 0.49            | -148 | 11.8            | 99   | 0.04            | 56   | 0.46            | -42 |
|                |            | 800        | 0.48            | -161 | 8.3             | 92   | 0.04            | 59   | 0.42            | -41 |
|                |            | 1000       | 0.46            | -170 | 6.7             | 86   | 0.05            | 59   | 0.41            | -44 |
|                |            | 1500       | 0.41            | -171 | 4.4             | 75   | 0.07            | 70   | 0.42            | -45 |
|                |            | 2000       | 0.40            | 152  | 3.3             | 66   | 0.09            | 71   | 0.41            | -50 |
|                |            | 2500       | 0.39            | 135  | 2.6             | 59   | 0.11            | 71   | 0.41            | -55 |
|                |            | 3000       | 0.45            | 116  | 2.2             | 53   | 0.14            | 73   | 0.42            | -61 |
|                |            | 3500       | 0.50            | 108  | 1.9             | 46   | 0.17            | 70   | 0.39            | -70 |
|                |            | 4000       | 0.55            | 94   | 1.6             | 41   | 0.19            | 67   | 0.41            | -76 |
|                | 5000       | 0.61       | 87              | 1.3  | 32              | 0.22 | 62              | 0.34 | -114            |     |
|                | 6000       | 0.58       | 85              | 1.1  | 21              | 0.27 | 63              | 0.43 | -135            |     |
|                | 30         | 100        | 0.45            | -82  | 36.3            | 142  | 0.01            | 62   | 0.79            | -23 |
|                |            | 200        | 0.48            | -121 | 25.5            | 121  | 0.01            | 48   | 0.62            | -31 |
|                |            | 400        | 0.49            | -152 | 14.6            | 103  | 0.02            | 58   | 0.47            | -33 |
|                |            | 600        | 0.50            | -166 | 10.2            | 93   | 0.03            | 60   | 0.44            | -34 |
|                |            | 800        | 0.49            | -175 | 7.7             | 87   | 0.04            | 65   | 0.42            | -34 |
|                |            | 1000       | 0.48            | 177  | 6.1             | 81   | 0.05            | 76   | 0.43            | -37 |
| 1500           |            | 0.45       | 162             | 4.1  | 71              | 0.07 | 75              | 0.45 | -39             |     |
| 2000           |            | 0.45       | 145             | 3.0  | 62              | 0.09 | 78              | 0.44 | -46             |     |
| 2500           |            | 0.44       | 130             | 2.4  | 56              | 0.11 | 79              | 0.44 | -53             |     |
| 3000           |            | 0.50       | 113             | 1.9  | 50              | 0.13 | 79              | 0.45 | -58             |     |
| 3500           |            | 0.55       | 105             | 1.6  | 43              | 0.15 | 75              | 0.44 | -70             |     |
| 4000           |            | 0.61       | 92              | 1.5  | 39              | 0.19 | 73              | 0.45 | -76             |     |
| 5000           | 0.65       | 84         | 1.2             | 30   | 0.24            | 68   | 0.43            | -100 |                 |     |
| 6000           | 0.61       | 82         | 1.0             | 19   | 0.28            | 64   | 0.48            | -135 |                 |     |

Table 2. MRF9411LT1 Common Emitter S-Parameters (continued)



| V <sub>CE</sub><br>(Vdc) | I <sub>C</sub><br>(mA) | f<br>(MHz) | NF <sub>min</sub><br>(dB) | Γ <sub>o</sub><br>(MAG, ANGLE) | Γ <sub>N</sub> |
|--------------------------|------------------------|------------|---------------------------|--------------------------------|----------------|
| 6                        | 5                      | 1000       | 1.5                       | 0.33 ∠ 77                      | 0.28           |
|                          |                        | 1500       | 1.75                      | 0.26 ∠ 141                     | 0.3            |


Table 3. MRF947 Series Typical Noise Parameters

| V <sub>CE</sub><br>(Volts) | I <sub>C</sub><br>(mA) | f<br>(MHz) | S <sub>11</sub> |       | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |     |
|----------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-----|
|                            |                        |            | Mag             | ∠φ    | Mag             | ∠φ    | Mag             | ∠φ    | Mag             | ∠φ  |
| 1.0                        | 0.5                    | 100        | 0.966           | -11   | 1.776           | 170   | 0.031           | 83    | 0.998           | -5  |
|                            |                        | 200        | 0.956           | -23   | 1.735           | 161   | 0.061           | 75    | 0.991           | -9  |
|                            |                        | 500        | 0.892           | -55   | 1.587           | 132   | 0.135           | 55    | 0.923           | -21 |
|                            |                        | 900        | 0.749           | -91   | 1.355           | 104   | 0.185           | 35    | 0.827           | -34 |
|                            |                        | 1000       | 0.720           | -100  | 1.300           | 98    | 0.190           | 32    | 0.808           | -36 |
|                            |                        | 1500       | 0.637           | -134  | 1.057           | 73    | 0.196           | 18    | 0.743           | -47 |
|                            |                        | 2000       | 0.587           | -164  | 0.883           | 53    | 0.176           | 12    | 0.708           | -58 |
|                            | 3000                   | 0.572      | 149             | 0.672 | 27              | 0.149 | 33              | 0.680 | -82             |     |
|                            | 1.0                    | 100        | 0.941           | -14   | 3.391           | 168   | 0.031           | 81    | 0.991           | -6  |
|                            |                        | 200        | 0.921           | -28   | 3.285           | 158   | 0.060           | 73    | 0.974           | -12 |
|                            |                        | 500        | 0.806           | -65   | 2.844           | 128   | 0.123           | 51    | 0.852           | -27 |
|                            |                        | 900        | 0.638           | -104  | 2.196           | 101   | 0.158           | 35    | 0.717           | -39 |
|                            |                        | 1500       | 0.533           | -146  | 1.580           | 72    | 0.168           | 25    | 0.619           | -50 |
|                            |                        | 2000       | 0.495           | -174  | 1.281           | 55    | 0.164           | 25    | 0.581           | -60 |
| 3000                       |                        | 0.494      | 144             | 0.956 | 29              | 0.187 | 39              | 0.554 | -81             |     |
| 2.0                        | 0.5                    | 100        | 0.979           | -9    | 1.827           | 173   | 0.030           | 85    | 0.996           | -4  |
|                            |                        | 200        | 0.960           | -18   | 1.909           | 165   | 0.060           | 80    | 0.991           | -9  |
|                            |                        | 500        | 0.920           | -43   | 1.652           | 144   | 0.132           | 65    | 0.940           | -19 |
|                            |                        | 1000       | 0.749           | -77   | 1.451           | 116   | 0.196           | 47    | 0.842           | -32 |
|                            |                        | 1500       | 0.674           | -105  | 1.190           | 94    | 0.214           | 36    | 0.774           | -39 |
|                            |                        | 2000       | 0.548           | -128  | 1.077           | 79    | 0.189           | 33    | 0.692           | -43 |
|                            |                        | 3000       | 0.480           | -178  | 0.808           | 60    | 0.153           | 55    | 0.625           | -52 |
|                            | 2.0                    | 100        | 0.907           | -16   | 6.640           | 167   | 0.029           | 81    | 0.977           | -9  |
|                            |                        | 200        | 0.846           | -32   | 6.419           | 156   | 0.054           | 73    | 0.944           | -17 |
|                            |                        | 500        | 0.711           | -68   | 4.874           | 128   | 0.104           | 57    | 0.770           | -32 |
|                            |                        | 1000       | 0.495           | -106  | 3.178           | 103   | 0.138           | 50    | 0.603           | -41 |
|                            |                        | 1500       | 0.405           | -131  | 2.358           | 86    | 0.157           | 52    | 0.542           | -45 |
|                            |                        | 2000       | 0.314           | -155  | 1.910           | 75    | 0.173           | 58    | 0.490           | -44 |
|                            | 5.0                    | 100        | 0.780           | -28   | 14.100          | 159   | 0.027           | 78    | 0.932           | -15 |
|                            |                        | 200        | 0.676           | -51   | 12.219          | 142   | 0.046           | 67    | 0.831           | -27 |
|                            |                        | 500        | 0.470           | -95   | 7.373           | 113   | 0.078           | 59    | 0.568           | -40 |
|                            |                        | 1000       | 0.327           | -132  | 4.148           | 92    | 0.114           | 62    | 0.436           | -43 |
|                            |                        | 1500       | 0.271           | -153  | 2.921           | 81    | 0.151           | 66    | 0.413           | -44 |
|                            |                        | 2000       | 0.218           | -177  | 2.295           | 72    | 0.188           | 69    | 0.394           | -41 |
|                            |                        | 3000       | 0.237           | 138   | 1.661           | 58    | 0.265           | 70    | 0.372           | -43 |

Table 4. MRF947 Series Common Emitter S-Parameters

| V <sub>CE</sub><br>(Volts) | I <sub>C</sub><br>(mA) | f<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |     | S <sub>12</sub> |    | S <sub>22</sub> |     |
|----------------------------|------------------------|------------|-----------------|------|-----------------|-----|-----------------|----|-----------------|-----|
|                            |                        |            | Mag             | ∠φ   | Mag             | ∠φ  | Mag             | ∠φ | Mag             | ∠φ  |
| 2.0                        | 10                     | 100        | 0.608           | -43  | 21.812          | 149 | 0.022           | 72 | 0.859           | -23 |
|                            |                        | 200        | 0.488           | -73  | 16.618          | 129 | 0.038           | 65 | 0.689           | -35 |
|                            |                        | 500        | 0.330           | -119 | 8.427           | 103 | 0.065           | 66 | 0.438           | -41 |
|                            |                        | 1000       | 0.262           | -152 | 4.484           | 87  | 0.109           | 71 | 0.354           | -40 |
|                            |                        | 1500       | 0.227           | -169 | 3.114           | 77  | 0.155           | 73 | 0.358           | -42 |
|                            |                        | 2000       | 0.197           | 166  | 2.423           | 69  | 0.198           | 73 | 0.355           | -38 |
|                            |                        | 3000       | 0.233           | 128  | 1.755           | 57  | 0.281           | 71 | 0.338           | -40 |
|                            | 30                     | 100        | 0.353           | -100 | 25.543          | 131 | 0.018           | 70 | 0.653           | -29 |
|                            |                        | 200        | 0.353           | -135 | 15.823          | 112 | 0.026           | 68 | 0.484           | -34 |
|                            |                        | 500        | 0.346           | -163 | 6.979           | 93  | 0.054           | 76 | 0.367           | -29 |
|                            |                        | 1000       | 0.337           | 177  | 3.637           | 80  | 0.103           | 79 | 0.351           | -30 |
|                            |                        | 1500       | 0.324           | 166  | 2.518           | 71  | 0.150           | 79 | 0.372           | -36 |
|                            |                        | 2000       | 0.319           | 148  | 1.975           | 63  | 0.197           | 78 | 0.378           | -35 |
|                            |                        | 3000       | 0.374           | 122  | 1.441           | 51  | 0.290           | 75 | 0.363           | -42 |
| 6.0                        | 0.5                    | 100        | 0.978           | -9   | 1.791           | 173 | 0.024           | 86 | 0.995           | -4  |
|                            |                        | 200        | 0.964           | -17  | 1.889           | 166 | 0.049           | 80 | 0.994           | -7  |
|                            |                        | 500        | 0.932           | -40  | 1.643           | 146 | 0.110           | 67 | 0.953           | -16 |
|                            |                        | 1000       | 0.765           | -73  | 1.473           | 121 | 0.165           | 50 | 0.869           | -28 |
|                            |                        | 1500       | 0.688           | -100 | 1.206           | 98  | 0.184           | 39 | 0.812           | -35 |
|                            |                        | 2000       | 0.554           | -123 | 1.099           | 84  | 0.162           | 38 | 0.735           | -38 |
|                            |                        | 3000       | 0.463           | -174 | 0.823           | 64  | 0.136           | 63 | 0.671           | -46 |
|                            | 2.0                    | 100        | 0.918           | -15  | 6.614           | 168 | 0.023           | 84 | 0.983           | -7  |
|                            |                        | 200        | 0.862           | -29  | 6.456           | 157 | 0.045           | 75 | 0.956           | -14 |
|                            |                        | 500        | 0.729           | -62  | 5.010           | 131 | 0.089           | 60 | 0.809           | -27 |
|                            |                        | 1000       | 0.504           | -99  | 3.344           | 106 | 0.121           | 53 | 0.654           | -35 |
|                            |                        | 1500       | 0.397           | -123 | 2.485           | 90  | 0.137           | 55 | 0.599           | -38 |
|                            |                        | 2000       | 0.295           | -146 | 2.013           | 78  | 0.152           | 62 | 0.553           | -37 |
|                            |                        | 3000       | 0.257           | 162  | 1.452           | 62  | 0.202           | 73 | 0.523           | -40 |
|                            | 5.0                    | 100        | 0.806           | -24  | 14.025          | 161 | 0.022           | 78 | 0.947           | -13 |
|                            |                        | 200        | 0.704           | -45  | 12.425          | 144 | 0.040           | 70 | 0.861           | -23 |
|                            |                        | 500        | 0.487           | -85  | 7.751           | 116 | 0.068           | 62 | 0.627           | -33 |
|                            |                        | 1000       | 0.316           | -120 | 4.399           | 95  | 0.101           | 65 | 0.505           | -35 |
|                            |                        | 1500       | 0.245           | -141 | 3.112           | 83  | 0.134           | 69 | 0.488           | -36 |
|                            |                        | 2000       | 0.177           | -166 | 2.447           | 74  | 0.167           | 72 | 0.473           | -33 |
|                            |                        | 3000       | 0.185           | 140  | 1.743           | 61  | 0.237           | 74 | 0.457           | -36 |
|                            | 10                     | 100        | 0.657           | -37  | 22.098          | 151 | 0.019           | 75 | 0.888           | -18 |
|                            |                        | 200        | 0.526           | -64  | 17.304          | 132 | 0.033           | 68 | 0.741           | -29 |
|                            |                        | 500        | 0.328           | -105 | 9.028           | 106 | 0.056           | 67 | 0.509           | -33 |
|                            |                        | 1000       | 0.228           | -138 | 4.844           | 89  | 0.096           | 73 | 0.438           | -31 |
|                            |                        | 1500       | 0.184           | -156 | 3.359           | 80  | 0.138           | 75 | 0.440           | -34 |
|                            |                        | 2000       | 0.140           | 175  | 2.591           | 72  | 0.175           | 76 | 0.441           | -31 |
|                            |                        | 3000       | 0.172           | 126  | 1.852           | 60  | 0.249           | 75 | 0.430           | -33 |
|                            | 20                     | 100        | 0.492           | -53  | 28.934          | 142 | 0.017           | 72 | 0.808           | -23 |
|                            |                        | 200        | 0.372           | -85  | 19.971          | 121 | 0.028           | 70 | 0.630           | -31 |
|                            |                        | 500        | 0.249           | -127 | 9.335           | 100 | 0.053           | 74 | 0.454           | -28 |
|                            |                        | 1000       | 0.201           | -156 | 4.878           | 86  | 0.094           | 78 | 0.418           | -27 |
|                            |                        | 1500       | 0.174           | -171 | 3.358           | 77  | 0.138           | 79 | 0.432           | -30 |
|                            |                        | 2000       | 0.149           | 161  | 2.580           | 70  | 0.177           | 78 | 0.444           | -28 |
|                            |                        | 3000       | 0.193           | 121  | 1.852           | 58  | 0.253           | 76 | 0.435           | -32 |


Table 4. MRF947 Series Common Emitter S-Parameters (continued)

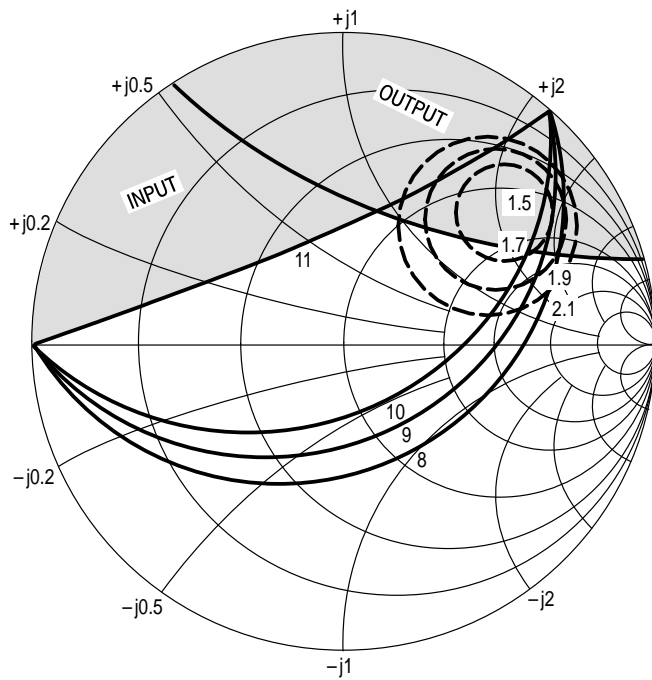

$V_{CE} = 1.0 \text{ V}$   
 $I_C = 0.5 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 0.5     | 1.54        | $0.71 \angle 39^\circ$ | 38    | 0.28 |


**Figure 15. MMBR941LT1, T3 Constant Gain and Noise Figure Contours (f = 1.0 GHz)**

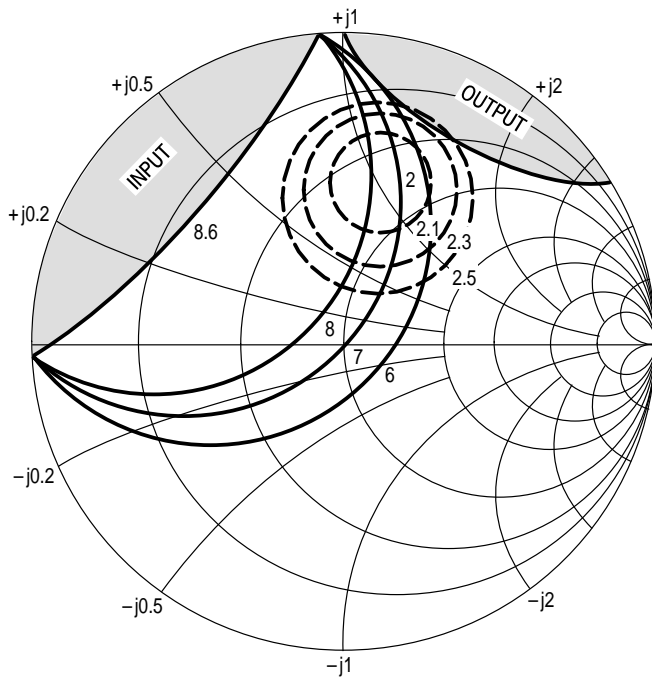

$V_{CE} = 1.0 \text{ V}$   
 $I_C = 0.5 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 1.0     | 1.95        | $0.55 \angle 76^\circ$ | 28    | 0.51 |


**Figure 16. MMBR941LT1, T3 Constant Gain and Noise Figure Contours (f = 0.5 GHz)**

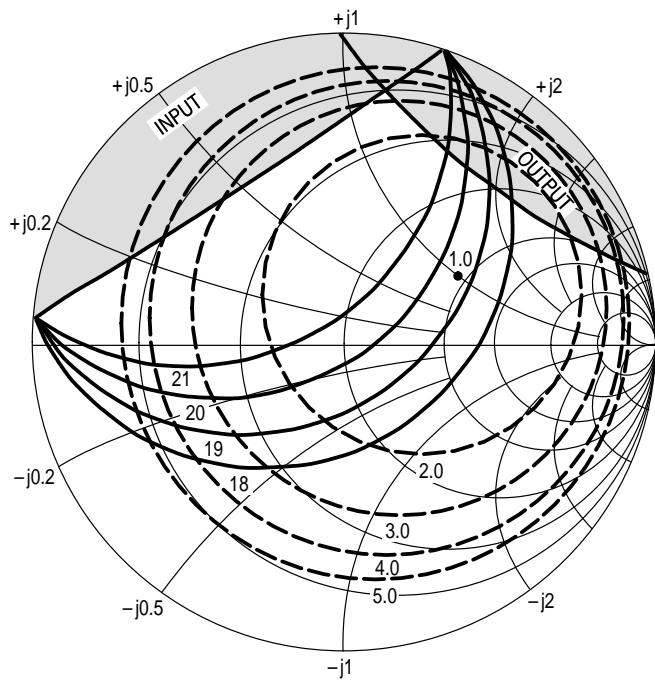

$V_{CE} = 6.0 \text{ V}$   
 $I_C = 5.0 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 0.5     | 1.0         | $0.43 \angle 30^\circ$ | 18    | 0.58 |


Figure 17. MMBR941LT1, T3 Constant Gain and Noise Figure Contours (f = 0.5 GHz)

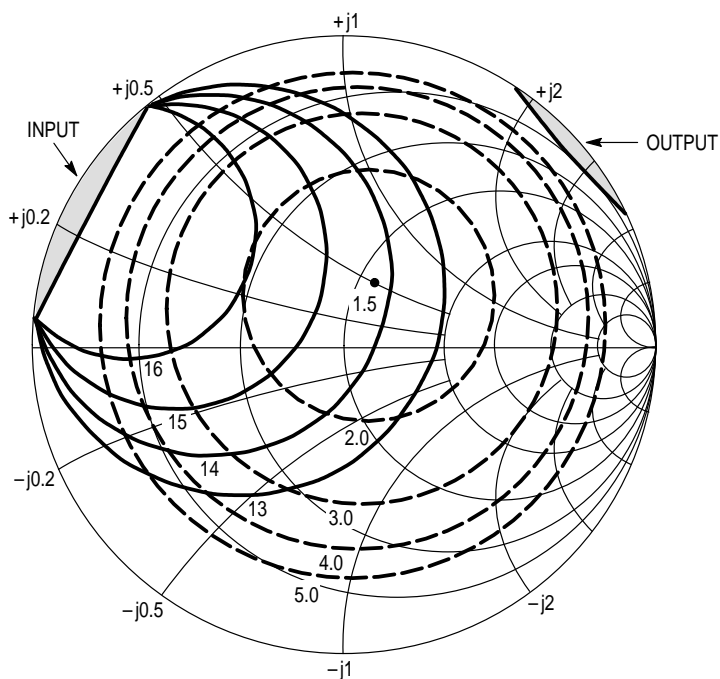

$V_{CE} = 6.0 \text{ V}$   
 $I_C = 5.0 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 1.0     | 1.5         | $0.22 \angle 64^\circ$ | 13    | 0.93 |


Figure 18. MMBR941LT1, T3 Constant Gain and Noise Figure Contours (f = 1.0 GHz)

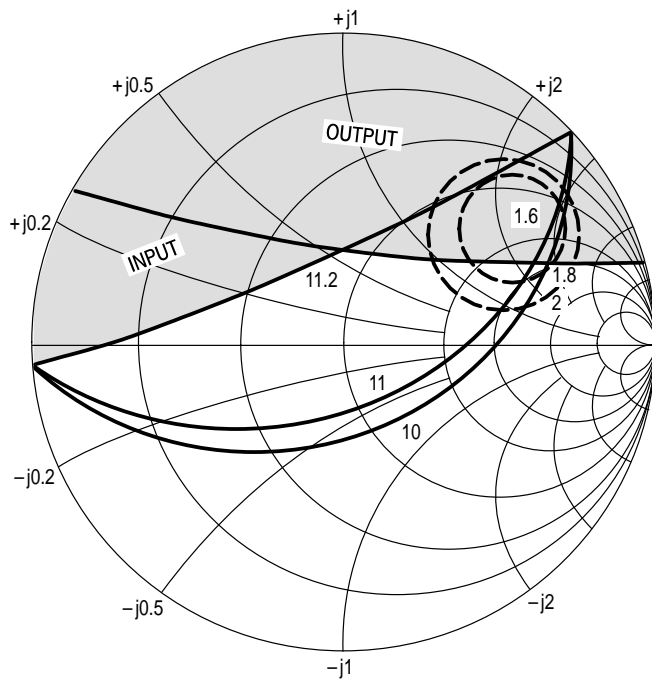

$V_{CE} = 1.0 \text{ V}$   
 $I_C = 0.5 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 0.5     | 1.60        | $0.70 \angle 35^\circ$ | 40    | 0.22 |


**Figure 19. MRF9411LT1 Constant Gain and Noise Figure Contours (f = 0.5 GHz)**

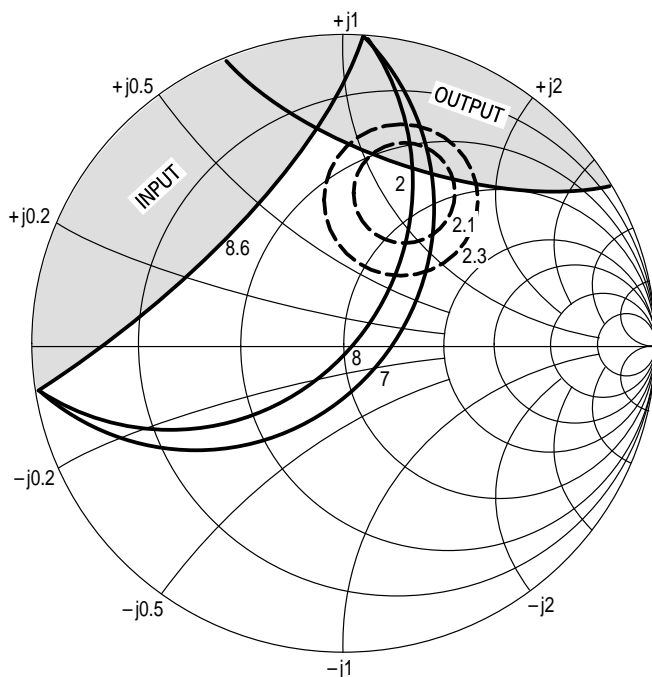

$V_{CE} = 1.0 \text{ V}$   
 $I_C = 0.5 \text{ mA}$   
 □ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 1.0     | 1.95        | $0.55 \angle 69^\circ$ | 30    | 0.39 |

**Figure 20. MRF9411LT1 Constant Gain and Noise Figure Contours (f = 1.0 GHz)**

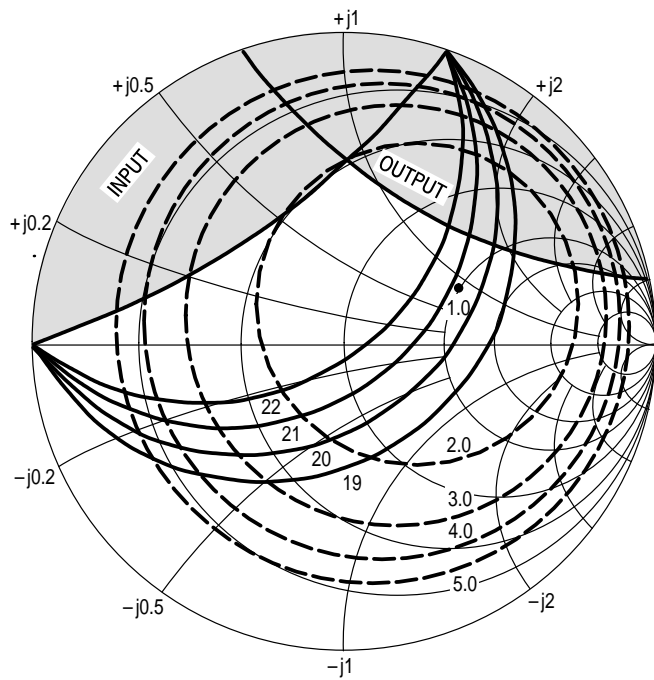


$V_{CE} = 6.0 \text{ V}$

$I_C = 5.0 \text{ mA}$

▭ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 0.5     | 1.0         | $0.40 \angle 28^\circ$ | 17    | 0.29 |

Figure 21. MRF9411LT1 Constant Gain and Noise Figure Contours  
(f = 0.5 GHz)

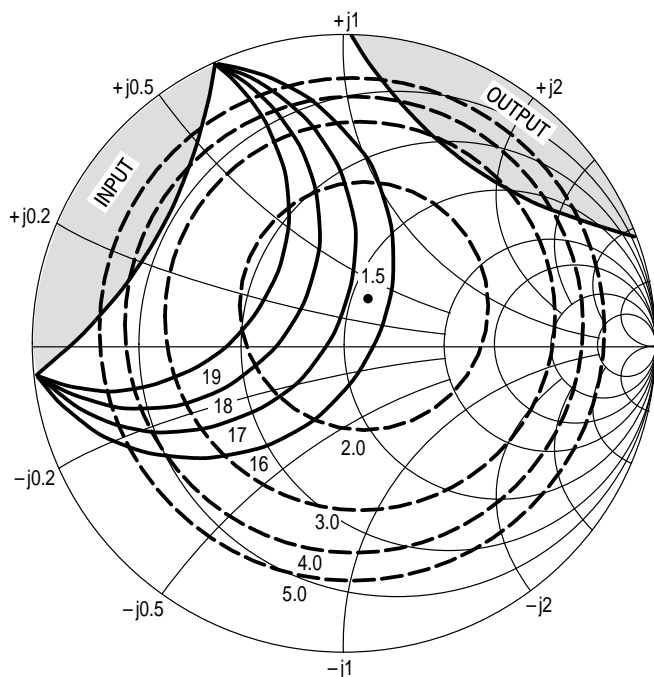

$V_{CE} = 6.0 \text{ V}$

$I_C = 5.0 \text{ mA}$


▭ — AREA OF INSTABILITY

| f (GHz) | NF OPT (dB) | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|-------------|------------------------|-------|------|
| 1.0     | 1.5         | $0.17 \angle 60^\circ$ | 13    | 0.53 |

Figure 22. MRF9411LT1 Constant Gain and Noise Figure Contours  
(f = 1.0 GHz)

$V_{CE} = 6\text{ V}$   
 $I_C = 5\text{ mA}$


| f (GHz) | NF OPT | $\Gamma_O$             | $R_N$ | K    |
|---------|--------|------------------------|-------|------|
| 1.0     | 1.5 dB | $0.33 \angle 77^\circ$ | 14    | 0.87 |

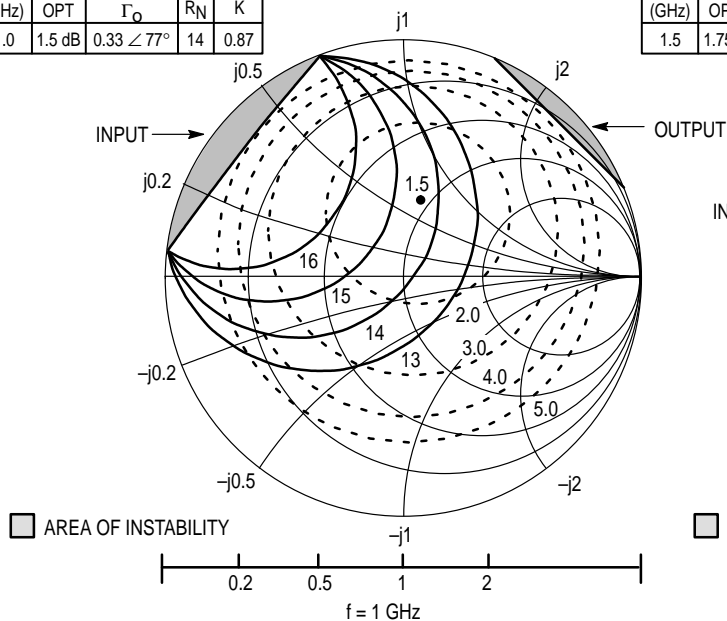

**Figure 23. MRF947 Series Constant Gain and Noise Figure Contours**

$V_{CE} = 6\text{ V}$   
 $I_C = 5\text{ mA}$


| f (GHz) | NF OPT  | $\Gamma_O$              | $R_N$ | K    |
|---------|---------|-------------------------|-------|------|
| 1.5     | 1.75 dB | $0.26 \angle 141^\circ$ | 15    | 0.96 |

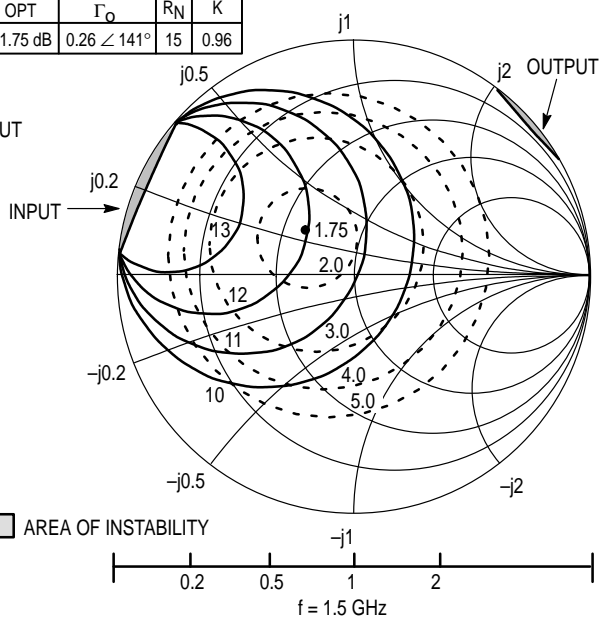

**Figure 24. MRF947 Series Constant Gain and Noise Figure Contours**


$V_{CE} = 1\text{ V}$   
 $I_C = 0.5\text{ mA}$

| f (GHz) | NF OPT  | $\Gamma_{MS}$ NF OPT   | $R_N$ | K    |
|---------|---------|------------------------|-------|------|
| 1.0     | 1.95 dB | $0.59 \angle 72^\circ$ | 30    | 0.50 |

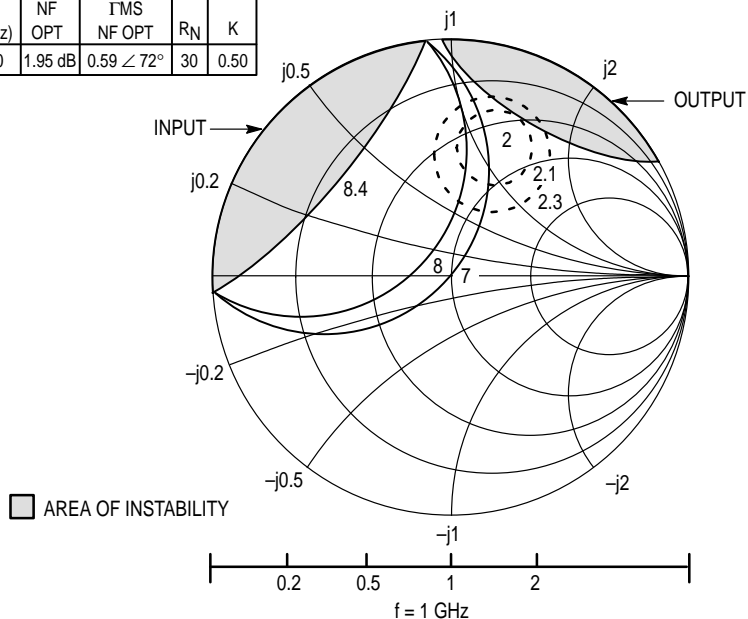

**Figure 25. MRF947 Series Constant Gain and Noise Figure Contours**

## PACKAGE DIMENSIONS

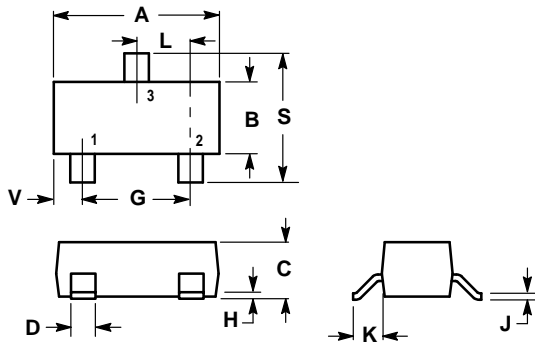


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM | INCHES |        | MILLIMETERS |       |
|-----|--------|--------|-------------|-------|
|     | MIN    | MAX    | MIN         | MAX   |
| A   | 0.1102 | 0.1197 | 2.80        | 3.04  |
| B   | 0.0472 | 0.0551 | 1.20        | 1.40  |
| C   | 0.0350 | 0.0440 | 0.89        | 1.11  |
| D   | 0.0150 | 0.0200 | 0.37        | 0.50  |
| G   | 0.0701 | 0.0807 | 1.78        | 2.04  |
| H   | 0.0005 | 0.0040 | 0.013       | 0.100 |
| J   | 0.0034 | 0.0070 | 0.085       | 0.177 |
| K   | 0.0140 | 0.0285 | 0.35        | 0.69  |
| L   | 0.0350 | 0.0401 | 0.89        | 1.02  |
| S   | 0.0830 | 0.1039 | 2.10        | 2.64  |
| V   | 0.0177 | 0.0236 | 0.45        | 0.60  |

- STYLE 6:  
 PIN 1. BASE  
 2. EMITTER  
 3. COLLECTOR

**CASE 318-08  
 ISSUE AF  
 MMBR941LT1, T3, MMBR941BLT1**

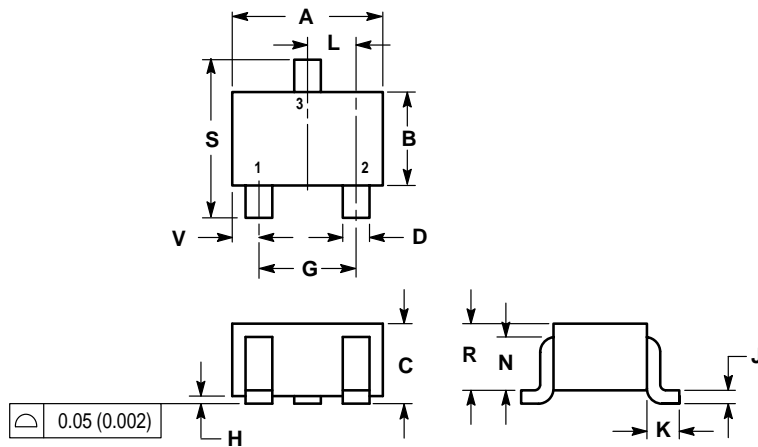


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.035     | 0.049 | 0.90        | 1.25 |
| D   | 0.012     | 0.016 | 0.30        | 0.40 |
| G   | 0.047     | 0.055 | 1.20        | 1.40 |
| H   | 0.000     | 0.004 | 0.00        | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.017 REF |       | 0.425 REF   |      |
| L   | 0.026 BSC |       | 0.650 BSC   |      |
| N   | 0.028 REF |       | 0.700 REF   |      |
| R   | 0.031     | 0.039 | 0.80        | 1.00 |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |
| V   | 0.012     | 0.016 | 0.30        | 0.40 |

- STYLE 3:  
 PIN 1. BASE  
 2. EMITTER  
 3. COLLECTOR

**CASE 419-02  
 ISSUE H  
 MRF947AT1, MRF947BT1,  
 MRF947T1, T3**



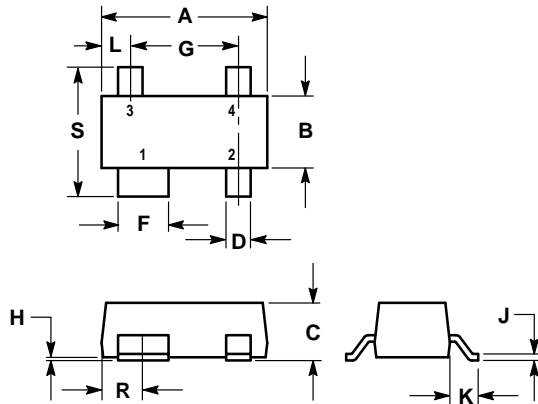


NOTES:  
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 5. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS |      | INCHES |       |
|-----|-------------|------|--------|-------|
|     | MIN         | MAX  | MIN    | MAX   |
| A   | 2.80        | 3.04 | 0.110  | 0.120 |
| B   | 1.20        | 1.39 | 0.047  | 0.055 |
| C   | 0.84        | 1.14 | 0.033  | 0.045 |
| D   | 0.39        | 0.50 | 0.015  | 0.020 |
| F   | 0.79        | 0.93 | 0.031  | 0.037 |
| G   | 1.78        | 2.03 | 0.070  | 0.080 |
| H   | 0.013       | 0.10 | 0.0005 | 0.004 |
| J   | 0.08        | 0.15 | 0.003  | 0.006 |
| K   | 0.46        | 0.60 | 0.018  | 0.024 |
| L   | 0.445       | 0.60 | 0.0175 | 0.024 |
| R   | 0.72        | 0.83 | 0.028  | 0.033 |
| S   | 2.11        | 2.48 | 0.083  | 0.098 |

STYLE 1:  
 PIN 1. COLLECTOR  
 2. EMITTER  
 3. EMITTER  
 4. BASE

**CASE 318A-05  
 ISSUE R  
 MRF9411LT1**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**  
**USA / EUROPE:** Motorola Literature Distribution;  
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609  
**INTERNET:** http://Design-NET.com

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

