

Technical Data Sheet (Preliminary) Surface Mount Device (Power Top View LED)

67-31A/SAC-AV1W2Z5/2T

Features

- PLCC-3 package.
- High flux output.
- High current capability.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Suitable for reflow and wave solder processes.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

The 67-31A series is available in soft orange, red and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector.

This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide

	Lens Color	
Material	Emitted Color	Lens Color
AlGaInP	Reddish Orange	Water Clear



Everlight Electronics Co., Ltd.

Device No.:

prepared date:28-Dec-2005

http://www.everlight.com


Rev. 1

Page: 1 of 10



67-31A/SAC-AV1W2Z5/2T

Package Dimensions

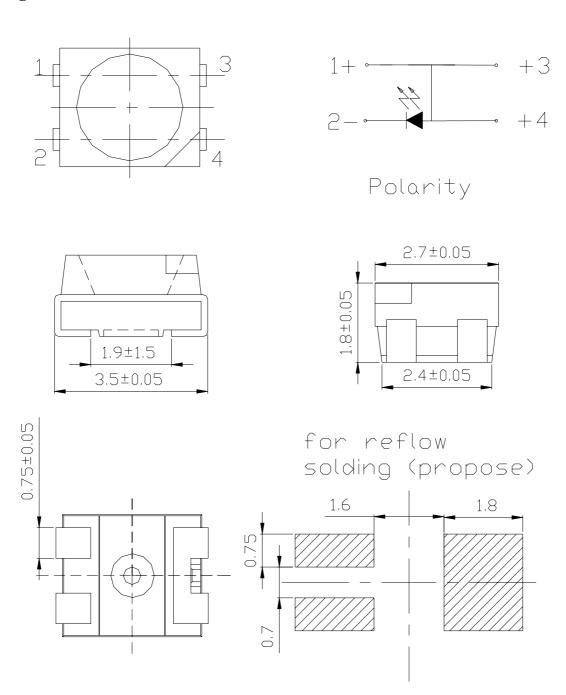

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm



67-31A/SAC-AV1W2Z5/2T

Absolute Maximum Ratings (T_A=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	70	mA
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\! \mathbb{C}$
Electrostatic Discharge(HBM)	ESD	2000	V
Power Dissipation	Pd	220	mW
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	150	mA
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Electronic Optical Characteristics:

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_{v}	715		1800	mcd	I _F =50mA
Viewing Angle	$2 heta_{ ext{1/2}}$		120		deg	I _F =50mA
Peak Wavelength	λp		621		nm	I _F =50mA
Dominant Wavelength	λ_d	606		622	nm	I _F =50mA
Spectrum Radiation Bandwidth	Δλ		18		nm	I _F =50mA
Forward Voltage	V_{F}		2.6	3.0	V	I _F =50mA
Reverse Current	I_R			10	μ A	$V_R=5V$

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2. Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com prepared date:28-Dec-2005 Rev. 1

Page: 3 of 10



67-31A/SAC-AV1W2Z5/2T

Bin Range Of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
E1	606	610		nm I _F =50mA
E2	610	614	nm	
E3	614	618		
E4	618	622		

Bin Range Of Luminous Intensity

	· · · · · · · · · · · · · · · · · · ·				
Bin	Min	Max	Unit	Condition	
V1	715	900	mcd		
V2	900	1120		IF=50mA	
W1	1120	1420			
W2	1420	1800			

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd.


Device No.:


http://www.everlight.com prepared date:28-Dec-2005 Rev. 1


Page: 4 of 10


67-31A/SAC-AV1W2Z5/2T

Typical Electro-Optical Characteristic Curves











Forward Voltage(V)-volts



Forward Current $I_F(mA)$






67-31A/SAC-AV1W2Z5/2T

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

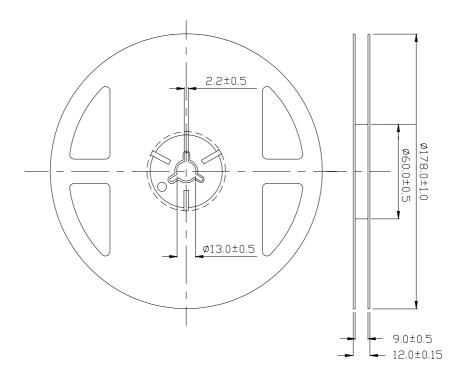

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


67-31A/SAC-AV1W2Z5/2T

Carrier Tape Dimensions; Loaded quantity per reel 2000 PCS/reel

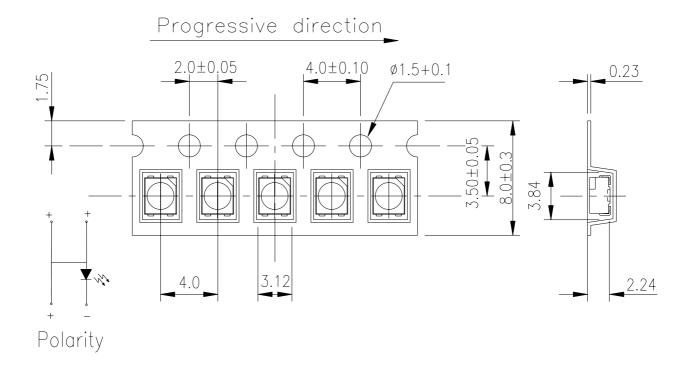

Note: Tolerances Unless Dimension ± 0.1 mm Unit = mm

Moisture Resistant Packaging

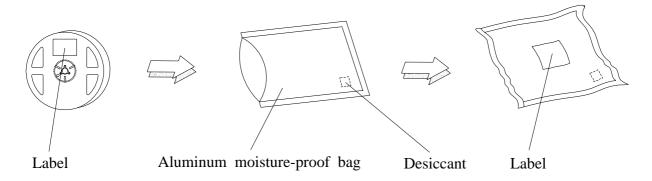

Everlight Electronics Co., Ltd.

Device No.:

http://www.everlight.com prepared date:28-Dec-2005

Rev. 1

Page: 7 of 10



67-31A/SAC-AV1W2Z5/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 PCS	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°€	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$If = 20 \text{ mA} / 25^{\circ}\text{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Rev. 1

Prepared by: Venis Wu

Page: 8 of 10



67-31A/SAC-AV1W2Z5/2T

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

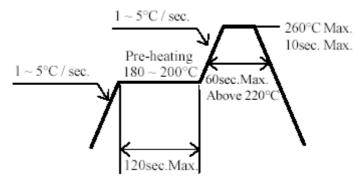

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Device No.:

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd.

http://www.everlight.com prepared date:28-Dec-2005 Rev. 1


Page: 9 of 10



67-31A/SAC-AV1W2Z5/2T

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

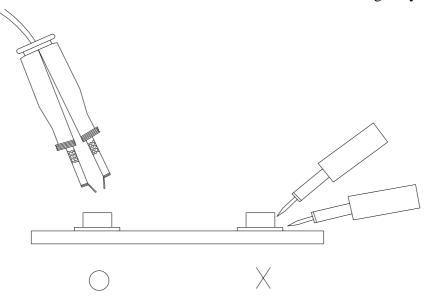

EVERLIGHT ELECTRONICS CO., LTD.

Device No.:

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

Rev. 1

Page: 10 of 10

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com

prepared date:28-Dec-2005 Prepared by: Venis Wu