



## Features

- Data rate 155Mbps
- 1310nm FP laser and PIN photodetector for 15km and 40km transmission
- SFP MSA package with duplex LC connector
- +3.3V single power supply
- Power consumption less than 1W
- Operating case temperature  
Standard temp: -5~+70°C  
Industrial temp: -40~+85°C
- RoHS compliant

## Regulatory Compliance

**Table 1 - Regulatory Compliance**

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2	Compliant with standard
Electromagnetic Interference (EMI)	FCC Part 15 Class B	Compliant with standard
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN (IEC) 60825-1,2	Compliant with Class I laser product.
RoHS	2002/95/EC 4.1&4.2 2005/747/EC	Compliant with RoHS

## Absolute Maximum Ratings

**Table 2 - Absolute Maximum Ratings**

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	T <sub>s</sub>	-40	-	+85	°C	
Supply Voltage	V <sub>CC</sub>	-0.5	-	+3.6	V	
Operating Relative Humidity	RH	+5	-	+95	%	

## Recommended Operating Conditions

**Table 3 – Recommended Operating Conditions**

Parameter		Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	Standard	$T_C$	-5	-	+70	°C	
	Industrial		-40	-	+85	°C	
Power Supply Voltage		$V_{CC}$	3.13	3.3	3.47	V	
Power Supply Current		$I_{CC}$	-	-	300	mA	
Power Dissipation		$P_D$	-	-	1	W	
Data Rate				155		Mbps	

## Optical Characteristics

**Table 4 – Optical Characteristics**

SP-03-IR1-CNFM SP-03-IR1-INFM (1310nm FP and PIN, 15km)

Transmitter						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Centre Wavelength	$\lambda_C$	1261		1360	nm	
Average Output Power	P <sub>OUT</sub>	-15		-8	dBm	1
Spectral Width (RMS)	$\Delta\lambda$			7.7	nm	
Extinction Ratio	EX	8.2			dB	
Jitter Generation (RMS)				0.01	UI	
Jitter Generation (pk-pk)				0.1	UI	
Optical Eye Mask	Compliant with Telcordia GR-253-CORE and ITU-T G.957					2
Receiver						
Centre Wavelength	$\lambda_C$	1260		1580	nm	
Receiver Sensitivity	P <sub>IN</sub>			-28	dBm	3
Receiver Overload	P <sub>IN</sub>	-8			dBm	3
Optical Path Penalty				1	dB	4
LOS Assert	LOS <sub>A</sub>	-45			dBm	
LOS Deassert	LOS <sub>D</sub>			-31	dBm	
LOS Hysteresis		0.5		4	dB	

Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps.
3. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps,  $BER \leq 1 \times 10^{-10}$ .
4. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps, over 15km G.652 SMF,  $BER \leq 1 \times 10^{-10}$ .

**Table 5 – Optical Characteristics**

**SP-03-LR1-CNFM SP-03-LR1-INFM (1310nm FP and PIN, 40km)**

Transmitter						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Centre Wavelength	$\lambda_C$	1263		1360	nm	
Average Output Power	P <sub>OUT</sub>	-5		0	dBm	1
Spectral Width (RMS)	$\Delta\lambda$			3	nm	
Extinction Ratio	EX	10			dB	
Jitter Generation (RMS)				0.01	UI	
Jitter Generation (pk-pk)				0.1	UI	
Optical Eye Mask	Compliant with Telcordia GR-253-CORE and ITU-T G.957					2
Receiver						
Centre Wavelength	$\lambda_C$	1260		1580	nm	
Receiver Sensitivity	P <sub>IN</sub>			-34	dBm	3
Receiver Overload	P <sub>IN</sub>	-10			dBm	3
Optical Path Penalty				1	dB	4
LOS Assert	LOS <sub>A</sub>	-45			dBm	
LOS Deassert	LOS <sub>D</sub>			-37	dBm	
LOS Hysteresis		0.5		4	dB	

Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps.
3. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps,  $BER \leq 1 \times 10^{-10}$ .
4. Measured with a PRBS  $2^{23}-1$  test pattern @155Mbps, over 40km G.652 SMF,  $BER \leq 1 \times 10^{-10}$ .

## Electrical Characteristics

**Table 6– Electrical Characteristics**


Transmitter						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Data Input Swing Differential	$V_{IN}$	500		2400	mV	1
Input Differential Impedance	$Z_{IN}$	90	100	110	$\Omega$	
Tx_DIS Disable	$V_D$	2.0		$V_{CC}$	V	
Tx_DIS Enable	$V_{EN}$	GND		GND+0.8	V	
TX_ Fault (Fault)		2.0		Vcc+0.3	V	
TX_ Fault (Normal)		0		0.8	V	
Receiver						
Data Output Swing Differential	$V_{OUT}$	370		2000	mV	1
Rx_LOS Fault	$V_{LOS-Fault}$	2.0		Vcc+0.3	V	

Rx_LOS Normal	$V_{\text{LOS-Normal}}$	GND		GND+0.8	V	
---------------	-------------------------	-----	--	---------	---	--

Notes:


1. Internally AC coupled

## Recommended Host Board Power Supply Circuit

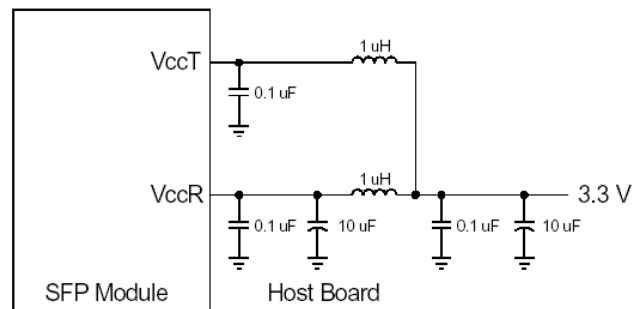

### Figure 1, Recommended Host Board Power Supply Circuit

## Recommended Interface Circuit

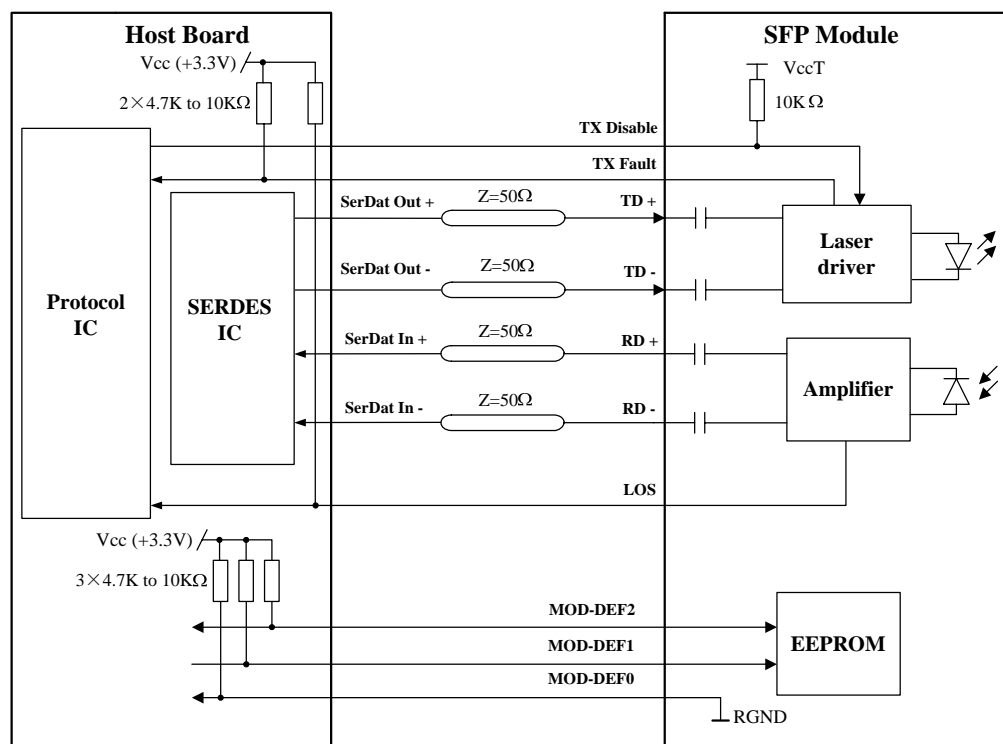

### Figure 2, Recommended Interface Circuit

## Pin Definitions

Figure 3 below shows the pin numbering of SFP electrical interface. The pin functions are described in Table

7 with some accompanying notes.

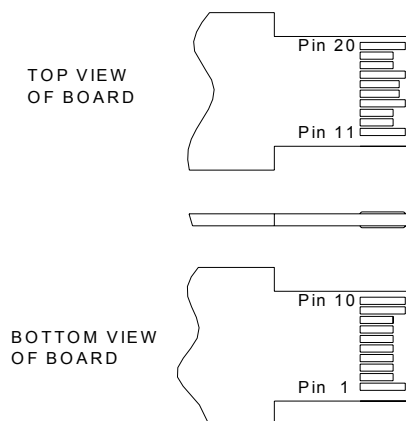


Figure 3, Pin View

Table 7 - Pin Function Definitions

Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2
4	MOD-DEF2	Module Definition 2	3	Note 3
5	MOD-DEF1	Module Definition 1	3	Note 3
6	MOD-DEF0	Module Definition 0	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	VeeR	Receiver Ground	1	
10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	VeeT	Transmitter Ground	1	

**Notes:**

- TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module

with a 4.7k~10k $\Omega$  resistor. Its states are:

Low (0~0.8V):	Transmitter on
(>0.8V, <2.0V):	Undefined
High (2.0~3.465V):	Transmitter Disabled
Open:	Transmitter Disabled

- MOD-DEF 0,1,2 are the module definition pins. They should be pulled up with a 4.7k~10k $\Omega$  resistor on the host board. The pull-up voltage shall be VccT or VccR.  
MOD-DEF 0 is grounded by the module to indicate that the module is present  
MOD-DEF 1 is the clock line of two wires serial interface for serial ID  
MOD-DEF 2 is the data line of two wires serial interface for serial ID
- LOS is an open collector output, which should be pulled up with a 4.7k~10k $\Omega$  resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates loss of signal. In the low state, the output will be pulled to less than 0.8V.
- These are the differential receiver output. They are internally AC-coupled 100 $\Omega$  differential lines which should be terminated with 100 $\Omega$  (differential) at the user SERDES.
- These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 $\Omega$  differential termination inside the module.

## EEPROM Information

The SFP MSA defines a 256-byte memory map in EEPROM describing the transceiver's capabilities, standard interfaces, manufacturer, and other information, which is accessible over a 2 wire serial interface at the 8-bit address 1010000X (A0h). The memory contents refer to Table 8.


Table 8 - EEPROM Serial ID Memory Contents (A0h)

Addr.	Field Size (Bytes)	Name of Field	Hex	Description
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	MOD4
2	1	Connector	07	LC
3—10	8	Transceiver	00 xx xx 00 00 00 00 00	OC 3, Single mode inter. or long reach
11	1	Encoding	03	NRZ
12	1	BR, nominal	02	155Mbps
13	1	Reserved	00	
14	1	Length (9um)-km	0F/28	15km/40km
15	1	Length (9um)	96/FF	15km/40km
16	1	Length (50um)	00	
17	1	Length (62.5um)	00	
18	1	Length (copper)	00	
19	1	Reserved	00	

20—35	16	Vendor name	53 4F 55 52 43 45 50 48 4F 54 4F 4E 49 43 53 20	“SOURCEPHOTONICS”(ASC II )
36	1	Reserved	00	
37—39	3	Vendor OUI	00 1F 22	
40—55	16	Vendor PN	53 50 30 33 xx xx xx xx 4E 46 4D 20 20 20 20 20	“SP03xxxxNFM” (ASC II )
56—59	4	Vendor rev	31 30 20 20	ASC II ( “31 30 20 20” means 1.0 revision)
60-61	2	Wavelength	05 1E	1310nm
62	1	Reserved	00	
63	1	CC BASE	xx	Check sum of bytes 0 - 62
64—65	2	Options	00 1A	LOS, TX_FAULT and TX_DISABLE
66	1	BR, max	00	
67	1	BR, min	00	
68—83	16	Vendor SN	xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx	ASC II .
84—91	8	Vendor date code	xx xx xx xx xx xx 20 20	Year (2 bytes), Month (2 bytes), Day (2 bytes)
92—94	3	Reserved	00 00 00	
95	1	CC EXT	xx	Check sum of bytes 64 - 94
96—255	160	Vendor specific		

Note: The “xx” byte should be filled in according to practical case. For more information, please refer to the related document of SFP Multi-Source Agreement (MSA).

## Mechanical Diagram

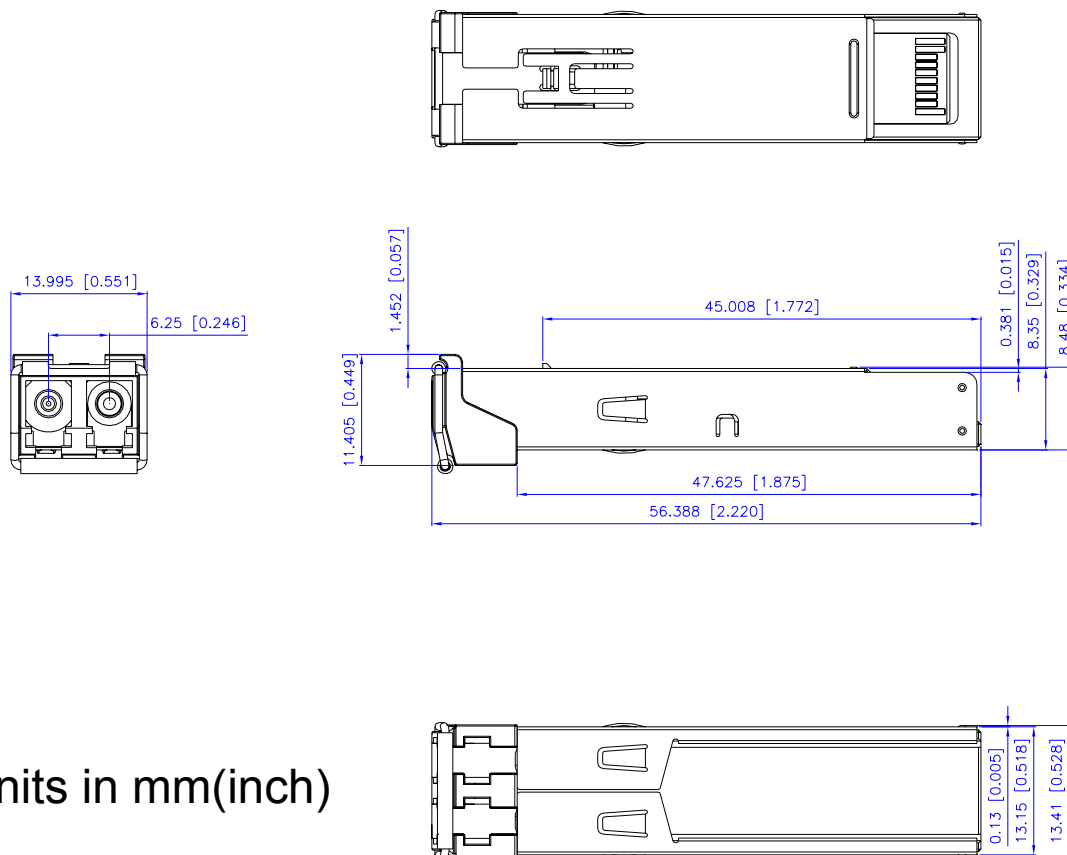

Units in mm(inch)

Figure 4, Mechanical Design Diagram of the SFP

## Order Information

Table 9– Order Information

Part No.	Application	Temperature	Data Rate	Laser Source	Fiber Type
SP-03-IR1-CNFM	SDH STM-1, S-1.1 SONET OC-3 IR1	-5~+70°C	155Mbps	1310nm FP	SMF
SP-03-IR1-INFM	SDH STM-1, S-1.1 SONET OC-3 IR1	-40~+85°C	155Mbps	1310nm FP	SMF
SP-03-LR1-CNFM	SDH STM-1, L-1.1 SONET OC-3 LR1	-5~+70°C	155Mbps	1310nm FP	SMF
SP-03-LR1-INFM	SDH STM-1, L-1.1 SONET OC-3 LR1	-40~+85°C	155Mbps	1310nm FP	SMF

## Warnings

**Handling Precautions:** This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.



**Laser Safety:** Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

## **Legal Notice**

### **IMPORTANT NOTICE!**

All information contained in this document is subject to change without notice, at Source Photonics's sole and absolute discretion. Source Photonics warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and Source Photonics expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

Source Photonics assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Source Photonics makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Source Photonics customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Source Photonics for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that Source Photonics is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Source Photonics to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

## **Contact**

### **U.S.A. Headquarters**

20550 Nordhoff Street  
Chatsworth, CA 91311  
USA  
Tel: +1-818-773-9044  
Fax: +1-818-773-0261

Building #2&5, West Export Processing Zone

No. 8 Kexin Road, Hi-Tech Zone

Chengdu, 611731, China

Tel: +86-28-8795-8788

Fax: +86-28-8795-8789

9F, No 81, Shui Lee Rd.

Hsinchu, Taiwan, R.O.C.

Tel: +886-3-5169222

Fax: +886-3-5169213

**China**

**Taiwan**

© Copyright Source Photonics, Inc. 2007~2008

All rights reserved