




TL431X

Programmable Precision Shunt Regulator

SOT-89

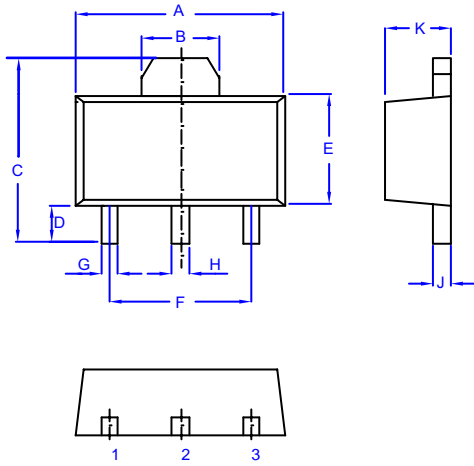

1. REFERENCE
 2. ANODE
 3. CATHODE

DIM	DIMENSIONS				NOTES
	INCHES		MM		
A	.173	.181	4.39	4.60	
B	.061	----	1.55	----	REF.
C	.154	.165	3.91	4.25	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118	----	3.00	----	TYP
G	.013	.019	0.33	0.48	
H	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
K	.055	.063	1.40	1.60	

Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Output voltage can be adjusted to 36V
- Trapping current capability is 1 to 100 mA
- The effective temperature compensation in the working range of full temperature

Maximum Ratings @ T_{opr}, Applies Unless Otherwise Noted

Parameter	Symbol	Value	Unit
Input Voltage (V _o =5.8V)	V ₁	37	V
Operating Junction Temperature	T _{opr}	0---70	°C
Storage Temperature Range	T _{stg}	-55---+150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Sym	Min	Typ	Max	Test conditions
Reference Input Voltage	V _{ref}	2.44V 0V	2.49V 5V	2.55V 0V	V _{KA} =V _{REF} , I _{KA} =10mA
Deviation of reference input voltage	ΔV _{ref} /ΔT		4.5mV	17mV	V _{KA} =V _{REF} , I _{KA} =10mA T _{min} ≤ T _a ≤ T _{max}
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	ΔV _{ref} /ΔV _{KA}		-1.0	-2.7	ΔV _{KA} = 10V~V _{ref} I _{KA} =10mA
Reference Input Current	I _{ref}		1.5uA	4uA	I _{KA} =10mA, R1=10KΩ R2=∞
Deviation of Reference Input Current Over Full Temperature Range	ΔI _{ref} /ΔT		0.4uA	1.2uA	I _{KA} =10mA, R1=10KΩ R2=∞ T _A =full Temperature
Minimum Cathode Current for Regulation	I _{KA} (min)		0.45m A	1.0mA	V _{KA} =V _{REF}
Off-State Cathode Current	I _{KA} (OFF)		0.05uA	1.0uA	V _{KA} =36V, V _{REF} =0V
Dynamic Impedance	Z _{KA}		0.15Ω	0.5Ω	V _{KA} =V _{REF} , I _{KA} =1 to 100mA, f ≤ 1.0KHz

*Note: Bypass Capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators

Fig. 1 – Cathode Current vs. Cathode Voltage

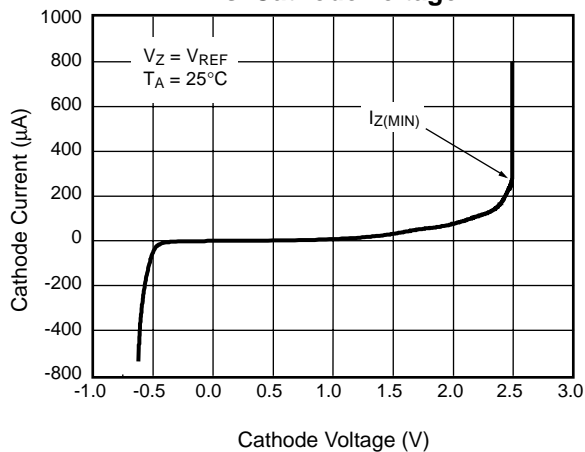


Fig. 2– Reference Voltage vs. Temperature

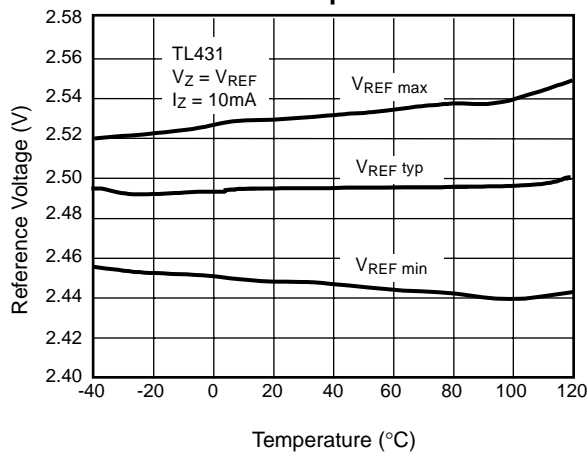


Fig. 3 – Reference Input Current vs. Temperature

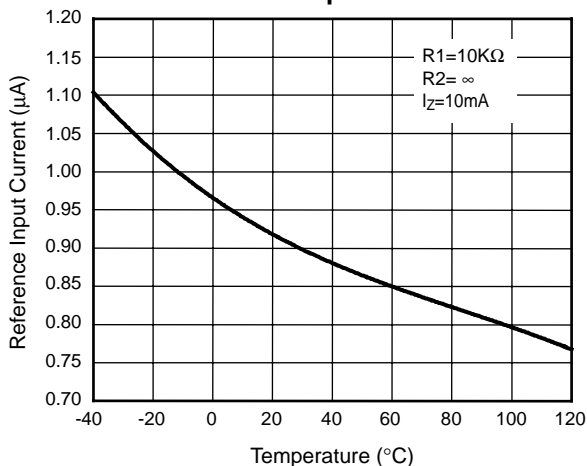


Fig. 4 – Dynamic Impedance vs. Temperature

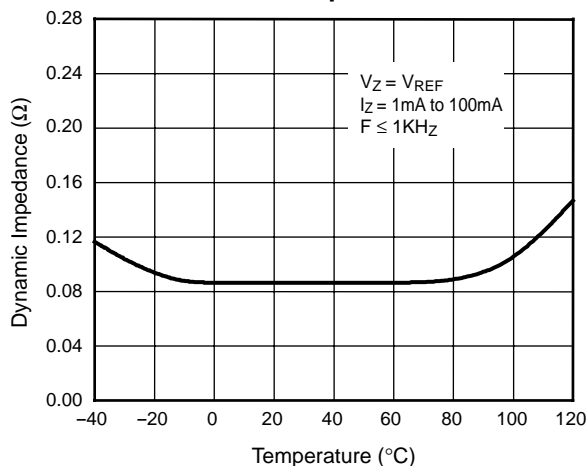


Fig. 5 – Change in Reference Voltage vs. Cathode Voltage


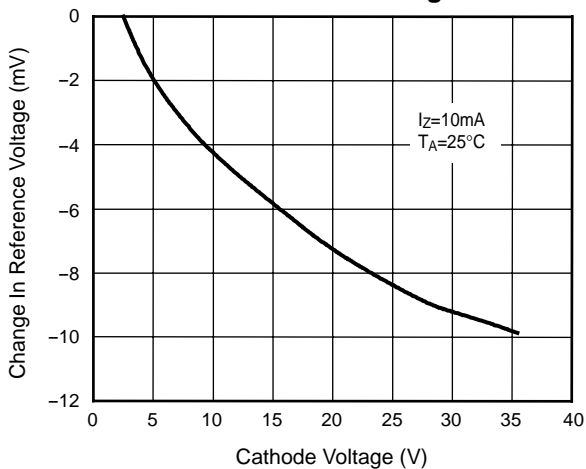


Fig. 6 – Off-State Cathode Current vs. Temperature



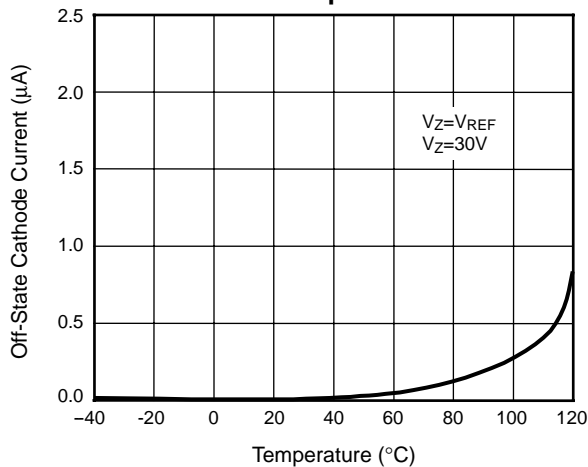

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel; 1Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com