

TRANSISTOR (NPN)

BC818-16

BC818-25

BC818-40

FEATURES

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage

SOT-23



1. BASE
2. Emitter
3. Collector

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	30	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	5	V
I_c	Collector Current -Continuous	0.5	A
P_c	Collector Power Dissipation	0.3	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55-150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	MIN		MAX	UNIT
Collector-base breakdown voltage	V_{CBO}	$I_C= 10\mu\text{A}, I_E=0$	30			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C= 10\text{mA}, I_B=0$	25			V
Emitter-base breakdown voltage	V_{EBO}	$I_E= 10\mu\text{A}, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}= 25 \text{ V}, I_E=0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}= 4\text{V}, I_C=0$			0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}= 1\text{V}, I_C= 100\text{mA}$	100		630	
	$h_{FE(2)}$	$V_{CE}= 1\text{V}, I_C= 300\text{mA}$	60			
Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$I_C= 500\text{mA}, I_B= 50\text{mA}$			0.7	V
Base-emitter saturation voltage	$V_{BE(\text{sat})}$	$I_C= 500\text{mA}, I_B= 50\text{mA}$			1.2	V
Base-emitter voltage	V_{BE}	$V_{CE}= 1\text{V}, I_C= 500\text{mA}$			1.2	V
Collector capacitance	C_{ob}	$V_{CB}= 10\text{V}, f= 1\text{MHz}$		6		pF
Transition frequency	f_T	$V_{CE}= 5 \text{ V}, I_C= 50\text{mA}$ $f= 100\text{MHz}$		170		MHz

CLASSIFICATION OF $h_{FE(1)}$


Rank	BC818-16	BC818-25	BC818-40
Range	100-250	160-400	250-630
Marking	6E	6F	6G

Typical Characteristics


**Typical Pulsed Current Gain
vs Collector Current**

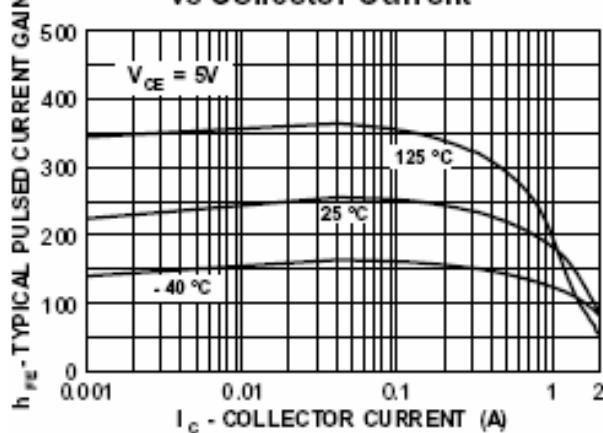


**Base-Emitter Saturation
Voltage vs Collector Current**

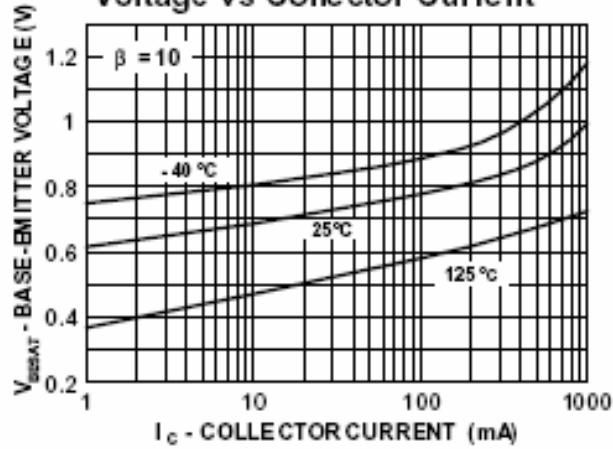


**Collector-Cutoff Current
vs Ambient Temperature**

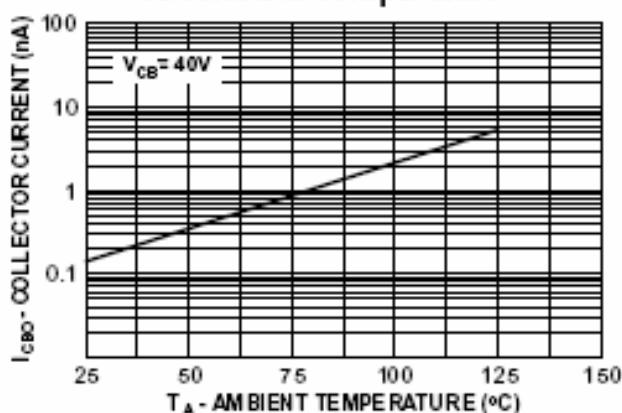

**Collector-Emitter Saturation
Voltage vs Collector Current**

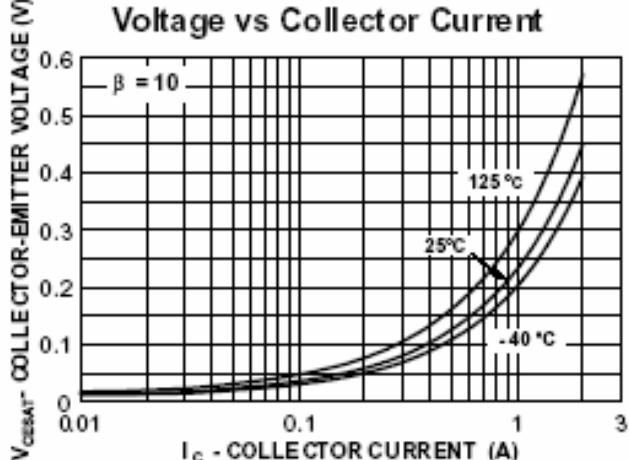

**Base-Emitter ON Voltage vs
Collector Current**

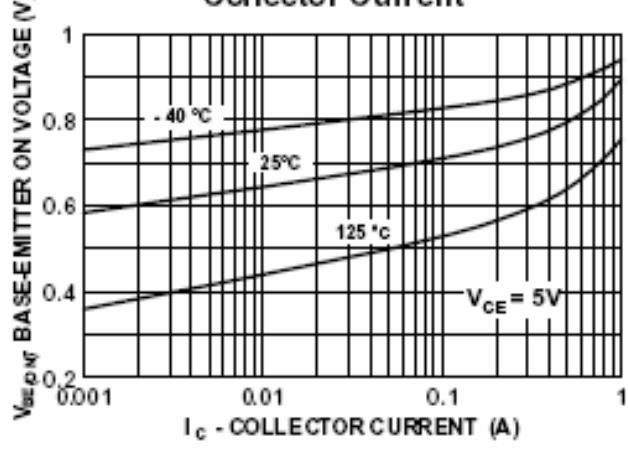

**Collector-Base Capacitance
vs Collector-Base Voltage**

