JMK Inc.

CC-0310-3

Operating Voltage = 115/250 V~ Operating Current = 3 Amps Operating Frequency = 50 / 60 Hz Temperature Range = -40 TO 65 Deg. C Diel. Withstand (L-CASE) = 1500 V~ FOR 1 MIN. Diel. Withstand (L-L) = 1500 Vdc For 1 Min. Leakage Current = 1.0 ma @ 250 V~, 60 Hz Discharge Volt after 1.0 second = 34 V Max.


Order P/N: CC-0310-3


The CC-0310-3 filter has a wide operating temperature range and is designed to sustain severe shock and vibration environments. The filter will function well with switching power supplies where a considerable amount of common mode and differential mode electrical noise is present.

The configuration of this filter will perform well in Mil-Std-461E test conditions.

LINE LOAD

| The state of the s



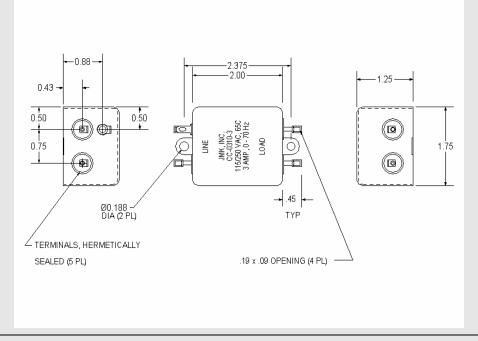

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-07785310729 FX: 44-(0) 141-589-1884