



**LD2982
SERIES**

VERY LOW DROP AND LOW NOISE VOLTAGE REGULATOR WITH INHIBIT FUNCTION

- VERY LOW DROPOUT VOLTAGE (120mV AT 50mA AND 7mV AT 1mA LOAD)
- VERY LOW QUIESCENT CURRENT (375 μ A TYP. AT 50mA LOAD AND 75 μ A AT 1mA)
- OUTPUT CURRENT UP TO 50mA
- LOGIC CONTROLLED ELECTRONIC SHUTDOWN
- OUTPUT VOLTAGE OF 1.8, 2.5, 2.8, 3, 3.1, 3.2, 3.3, 3.5, 3.6, 3.8, 4, 4.7, 5V
- INTERNAL CURRENT AND THERMAL LIMIT
- AVAILABLE IN $\pm 1\%$ TOLERANCE (AT 25°C, A VERSION)
- SUPPLY VOLTAGE REJECTION: 45dB (TYP)
- ONLY 1mF FOR STABILITY
- LOW OUTPUT NOISE VOLTAGE 30mVrms
- SMALLEST PACKAGE SOT23-5L
- TEMPERATURE RANGE: -40°C TO 125°C

DESCRIPTION

The LD2982 is a 50mA fixed output voltage regulator. The ultra low drop voltage and the low quiescent current make them particularly suitable for low noise, low power applications, and in battery powered systems. In sleep mode




quiescent current is less than 1mA when INHIBIT pin is pulled low. Shutdown Logic Control Function is available on pin 3 (TTL compatible). This means that when the device is used as local regulator, it is possible to put a part of the board in standby, decreasing the total power consumption.

An internal capacitor connected to the bypass pin C_{OUT} 30mVrms.

Typical application are in cellular phone, palmtop/laptop computer, personal digital assistant (PDA), personal stereo, camcorder and camera.

SCHEMATIC DIAGRAM

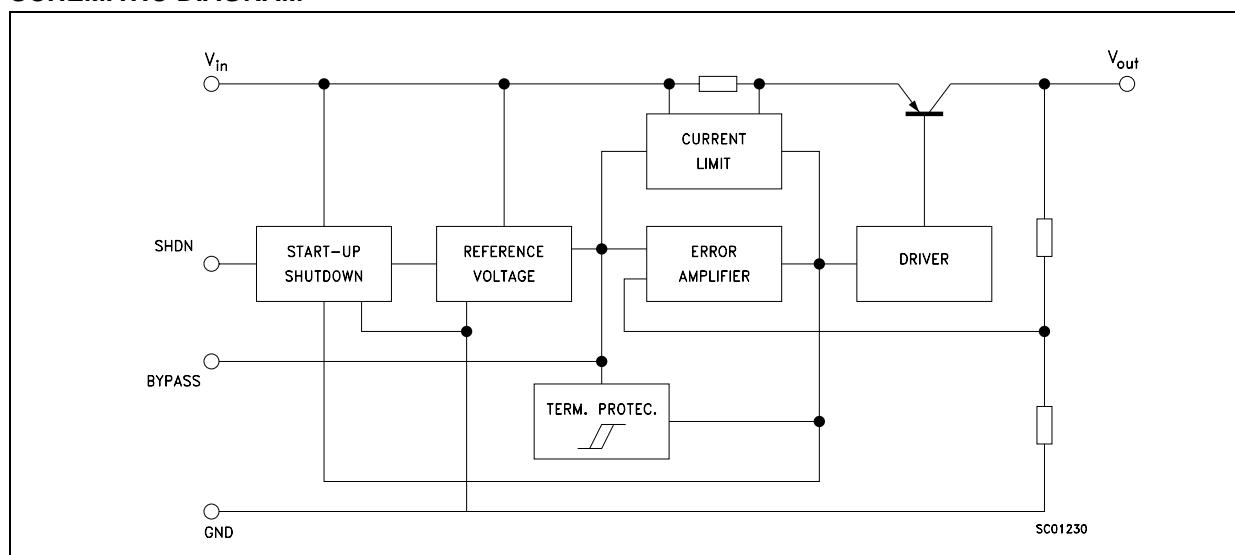

LD2982 SERIES

ABSOLUTE MAXIMUM RATINGS


| Symbol | Parameter | Value | Unit |
|-----------|--------------------------------------|--------------------|------|
| V_I | DC Input Voltage | 16 | V |
| V_{INH} | INHIBIT Input Voltage | 16 | V |
| I_O | Output Current | Internally limited | |
| P_{tot} | Power Dissipation | Internally limited | |
| T_{stg} | Storage Temperature Range | -65 to +150 | °C |
| T_{op} | Operating Junction Temperature Range | -40 to +125 | °C |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

THERMAL DATA

| Symbol | Parameter | SOT23-5L | Unit |
|----------------|----------------------------------|----------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case | 81 | °C/W |

CONNECTION DIAGRAM (top view)

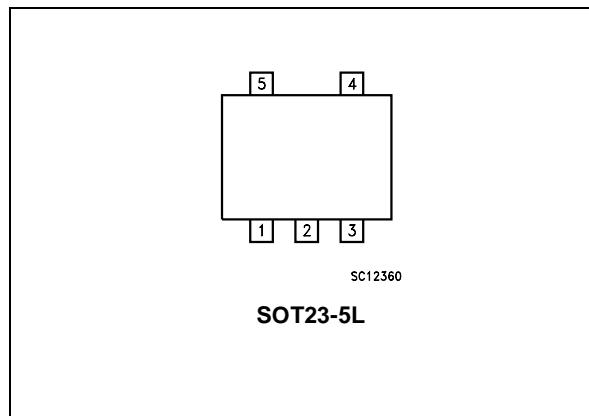

PIN DESCRIPTION

| Pin N° | Symbol | Name and Function |
|--------|---------|---|
| 1 | IN | Input Port |
| 2 | GND | Ground Pin |
| 3 | INHIBIT | Control switch ON/OFF. Inhibit is not internally pulled-up; it cannot be left floating. Disable the device when connected to GND or to a positive voltage less than 0.18V |
| 4 | Bypass | Bypass Pin: Capacitor to be connected to GND in order to improve the thermal noise performances. |
| 5 | OUT | Output Port |

ORDERING CODES

| A VERSION | B VERSION | OUTPUT VOLTAGES |
|-------------|-------------|-----------------|
| LD2982AM18R | LD2982BM18R | 1.8V |
| LD2982AM25R | LD2982BM25R | 2.5V |
| LD2982AM28R | LD2982BM28R | 2.8V |
| LD2982AM30R | LD2982BM30R | 3.0V |
| LD2982AM31R | LD2982BM31R | 3.1V |
| LD2982AM32R | LD2982BM32R | 3.2V |
| LD2982AM33R | LD2982BM33R | 3.3V |
| LD2982AM35R | LD2982BM35R | 3.5V |
| LD2982AM36R | LD2982BM36R | 3.6V |
| LD2982AM38R | LD2982BM38R | 3.8V |
| LD2982AM40R | LD2982BM40R | 4.0V |
| LD2982AM47R | LD2982BM47R | 4.7V |
| LD2982AM50R | LD2982BM50R | 5.0V |

ELECTRICAL CHARACTERISTICS FOR LD2982A ($T_j = 25^\circ\text{C}$, $V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$, $V_{SHDN}=2\text{V}$, $C_I = 1\mu\text{F}$, $C_O = 1\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|----------|-----------------------|---|-------|------|-------|------|
| V_O | Output Voltage | $V_I = 2.8\text{V}$ | 1.782 | 1.8 | 1.818 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 1.773 | | 1.827 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 1.764 | | 1.836 | V |
| V_O | Output Voltage | $V_I = 3.5\text{V}$ | 2.475 | 2.5 | 2.525 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.462 | | 2.537 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.45 | | 2.55 | V |
| V_O | Output Voltage | $V_I = 3.8\text{V}$ | 2.772 | 2.8 | 2.828 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.758 | | 2.842 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.744 | | 2.856 | V |
| V_O | Output Voltage | $V_I = 4.0\text{V}$ | 2.970 | 3.0 | 3.030 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.955 | | 3.045 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.94 | | 3.06 | V |
| V_O | Output Voltage | $V_I = 4.1\text{V}$ | 3.069 | 3.1 | 3.131 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.053 | | 3.146 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.038 | | 3.162 | V |
| V_O | Output Voltage | $V_I = 4.2\text{V}$ | 3.168 | 3.2 | 3.232 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.152 | | 3.248 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.136 | | 3.264 | V |
| V_O | Output Voltage | $V_I = 4.3\text{V}$ | 3.267 | 3.3 | 3.333 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.250 | | 3.349 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.234 | | 3.366 | V |
| V_O | Output Voltage | $V_I = 4.5\text{V}$ | 3.465 | 3.5 | 3.535 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.447 | | 3.552 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.43 | | 3.57 | V |
| V_O | Output Voltage | $V_I = 4.6\text{V}$ | 3.564 | 3.6 | 3.636 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.546 | | 3.654 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.528 | | 3.672 | V |
| V_O | Output Voltage | $V_I = 4.8\text{V}$ | 3.762 | 3.8 | 3.838 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.743 | | 3.857 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.724 | | 3.876 | V |
| V_O | Output Voltage | $V_I = 5.0\text{V}$ | 3.96 | 4 | 4.04 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.94 | | 4.06 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.92 | | 4.08 | V |
| V_O | Output Voltage | $V_I = 5.7\text{V}$ | 4.653 | 4.7 | 4.747 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 4.629 | | 4.77 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 4.606 | | 4.794 | V |
| V_O | Output Voltage | $V_I = 6.0\text{V}$ | 4.95 | 5 | 5.05 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 4.925 | | 5.075 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 4.9 | | 5.1 | V |
| I_{SC} | Short Circuit Current | $R_L = 0$ | | 150 | | mA |

LD2982 SERIES

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|--------------------------|---|-------------|-------------|-------------|-------------|
| $\Delta V_O/\Delta V_I$ | Line Regulation | $V_I = V_O + 1V$ to $16V$, $I_O = 1mA$ | | 0.003 | 0.014 | %/ V_I |
| | | $V_I = V_O + 1V$ to $16V$, $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 0.032 | %/ V_I |
| V_d | Dropout Voltage | $I_O = 0$ | | 1 | 3 | mV |
| | | $I_O = 0$ $T_J = -40$ to $125^\circ C$ | | | 5 | mV |
| | | $I_O = 1mA$ | | 7 | 10 | mV |
| | | $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 15 | mV |
| | | $I_O = 10mA$ | | 40 | 60 | mV |
| | | $I_O = 10mA$ $T_J = -40$ to $125^\circ C$ | | | 90 | mV |
| | | $I_O = 50mA$ | | 120 | 150 | mV |
| | | $I_O = 50mA$ $T_J = -40$ to $125^\circ C$ | | | 225 | mV |
| I_d | Quiescent Current | $I_O = 0$ | | 65 | 95 | μA |
| | | $I_O = 0$ $T_J = -40$ to $125^\circ C$ | | | 125 | μA |
| | | $I_O = 1mA$ | | 80 | 110 | μA |
| | | $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 170 | μA |
| | | $I_O = 10mA$ | | 140 | 220 | μA |
| | | $I_O = 10mA$ $T_J = -40$ to $125^\circ C$ | | | 460 | μA |
| | | $I_O = 50mA$ | | 375 | 600 | μA |
| | | $I_O = 50mA$ $T_J = -40$ to $125^\circ C$ | | | 1200 | μA |
| | | OFF MODE $V_{INH} < 0.18V$ | | 0 | | μA |
| | | OFF MODE $V_{INH} < 0.18V$ $T_J = -40$ to $125^\circ C$ | | | 1 | μA |
| SVR | Supply Voltage Rejection | $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ $f = 1KHz$ | | 45 | | dB |
| V_{IL} | Control Input Logic Low | $T_J = -40$ to $125^\circ C$ | | | 0.15 | V |
| V_{IH} | Control Input Logic High | $T_J = -40$ to $125^\circ C$ | 2 | | | V |
| I_{iNH} | Control Input Current | $T_J = -40$ to $125^\circ C$ $V_{SHDN} = 5V$ | | 5 | 15 | μA |
| | | $T_J = -40$ to $125^\circ C$ $V_{SHDN} = 0V$ | | 0 | -1 | μA |
| eN | Output Noise Voltage | B= 300Hz to 50KHz $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ | | 30 | | μV |

ELECTRICAL CHARACTERISTICS FOR LD2982B ($T_j = 25^\circ\text{C}$, $V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$, $V_{SHDN}=2\text{V}$, $C_I = 1\mu\text{F}$, $C_O = 1\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|----------|-----------------------|---|-------|------|-------|------|
| V_O | Output Voltage | $V_I = 2.8\text{V}$ | 1.773 | 1.8 | 1.827 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 1.764 | | 1.836 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 1.737 | | 1.863 | V |
| V_O | Output Voltage | $V_I = 3.5\text{V}$ | 2.462 | 2.5 | 2.537 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.45 | | 2.55 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.412 | | 2.587 | V |
| V_O | Output Voltage | $V_I = 3.8\text{V}$ | 2.758 | 2.8 | 2.842 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.744 | | 2.856 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.702 | | 2.898 | V |
| V_O | Output Voltage | $V_I = 4.0\text{V}$ | 2.955 | 3.0 | 3.045 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 2.94 | | 3.06 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.895 | | 3.105 | V |
| V_O | Output Voltage | $V_I = 4.1\text{V}$ | 3.053 | 3.1 | 3.146 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.038 | | 3.162 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.991 | | 3.208 | V |
| V_O | Output Voltage | $V_I = 4.2\text{V}$ | 3.152 | 3.2 | 3.248 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.136 | | 3.264 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.088 | | 3.312 | V |
| V_O | Output Voltage | $V_I = 4.3\text{V}$ | 3.250 | 3.3 | 3.349 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.234 | | 3.366 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.184 | | 3.415 | V |
| V_O | Output Voltage | $V_I = 4.5\text{V}$ | 3.447 | 3.5 | 3.552 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.430 | | 3.370 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.377 | | 3.662 | V |
| V_O | Output Voltage | $V_I = 4.6\text{V}$ | 3.546 | 3.6 | 3.654 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.528 | | 3.672 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.474 | | 3.726 | V |
| V_O | Output Voltage | $V_I = 4.8\text{V}$ | 3.743 | 3.8 | 3.857 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.724 | | 3.876 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.667 | | 3.933 | V |
| V_O | Output Voltage | $V_I = 5.0\text{V}$ | 3.94 | 4 | 4.06 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 3.92 | | 4.08 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 3.86 | | 4.14 | V |
| V_O | Output Voltage | $V_I = 5.7\text{V}$ | 4.629 | 4.7 | 4.77 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 4.606 | | 4.794 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 4.535 | | 4.864 | V |
| V_O | Output Voltage | $V_I = 6.0\text{V}$ | 4.925 | 5 | 5.075 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ | 4.9 | | 5.1 | V |
| | | $I_O = 1 \text{ to } 50\text{mA}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 4.825 | | 5.175 | V |
| I_{SC} | Short Circuit Current | $R_L = 0$ | | 400 | | mA |

LD2982 SERIES

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|--------------------------|---|------|-------|-------|----------|
| $\Delta V_O/\Delta V_I$ | Line Regulation | $V_I = V_O + 1V$ to $16V$, $I_O = 1mA$ | | 0.003 | 0.014 | %/ V_I |
| | | $V_I = V_O + 1V$ to $16V$, $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 0.032 | %/ V_I |
| V_d | Dropout Voltage | $I_O = 0$ | | 1 | 3 | mV |
| | | $I_O = 0$ $T_J = -40$ to $125^\circ C$ | | | 5 | mV |
| | | $I_O = 1mA$ | | 7 | 10 | mV |
| | | $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 15 | mV |
| | | $I_O = 10mA$ | | 40 | 60 | mV |
| | | $I_O = 10mA$ $T_J = -40$ to $125^\circ C$ | | | 90 | mV |
| | | $I_O = 50mA$ | | 120 | 150 | mV |
| | | $I_O = 50mA$ $T_J = -40$ to $125^\circ C$ | | | 225 | mV |
| I_d | Quiescent Current | $I_O = 0$ | | 65 | 95 | μA |
| | | $I_O = 0$ $T_J = -40$ to $125^\circ C$ | | | 125 | μA |
| | | $I_O = 1mA$ | | 80 | 110 | μA |
| | | $I_O = 1mA$ $T_J = -40$ to $125^\circ C$ | | | 170 | μA |
| | | $I_O = 10mA$ | | 140 | 220 | μA |
| | | $I_O = 10mA$ $T_J = -40$ to $125^\circ C$ | | | 460 | μA |
| | | $I_O = 50mA$ | | 375 | 600 | μA |
| | | $I_O = 50mA$ $T_J = -40$ to $125^\circ C$ | | | 1200 | μA |
| | | OFF MODE $V_{INH} < 0.18V$ | | 0 | | μA |
| | | OFF MODE $V_{INH} < 0.18V$ $T_J = -40$ to $125^\circ C$ | | | 1 | μA |
| SVR | Supply Voltage Rejection | $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ $f = 1KHz$ | | 45 | | dB |
| V_{IL} | Control Input Logic Low | $T_J = -40$ to $125^\circ C$ | | | 0.15 | V |
| V_{IH} | Control Input Logic High | $T_J = -40$ to $125^\circ C$ | 2 | | | V |
| I_{iNH} | Control Input Current | $T_J = -40$ to $125^\circ C$ $V_{SHDN} = 5V$ | | 5 | 15 | μA |
| | | $T_J = -40$ to $125^\circ C$ $V_{SHDN} = 0V$ | | 0 | -1 | μA |
| eN | Output Noise Voltage | B= 300Hz to 50KHz $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ | | 30 | | μV |

TYPICAL CHARACTERISTICS (unless otherwise specified $T_j = 25^\circ\text{C}$, $C_I=1\mu\text{F}$, $C_O=2.2\mu\text{F}$, $C_{BY}=100\text{nF}$)

Figure 1 : Output Voltage vs Temperature

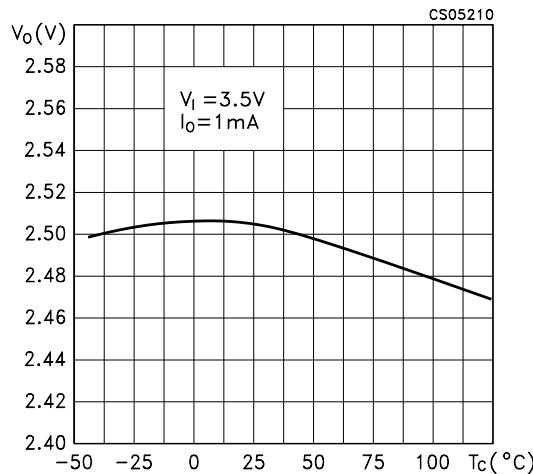


Figure 2 : Dropout Voltage vs Temperature

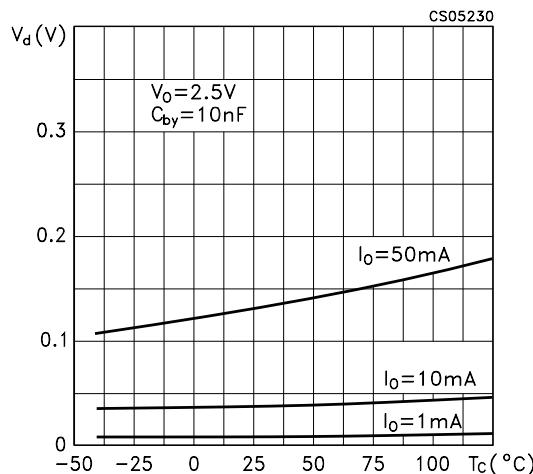


Figure 3 : Dropout Voltage vs Output Current

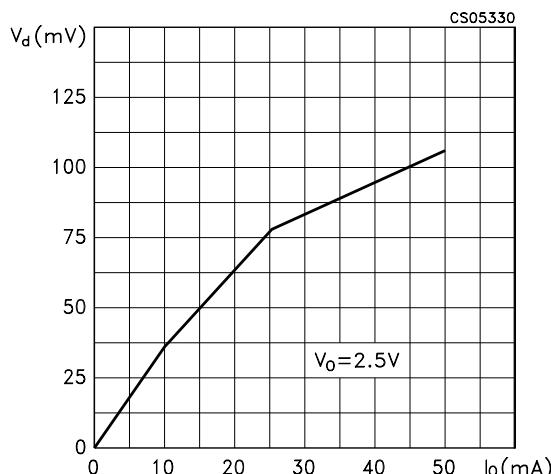


Figure 4 : Quiescent Current vs Load Current

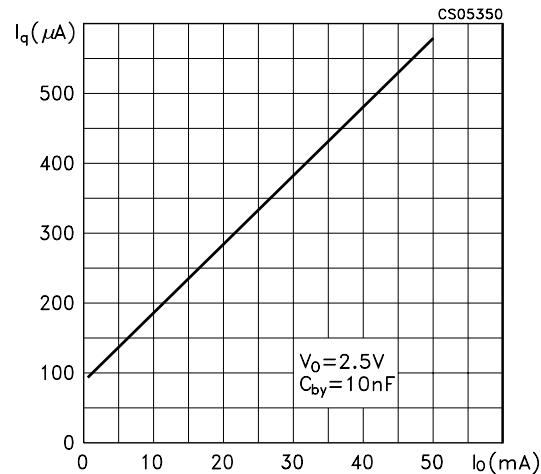


Figure 5 : Quiescent Current vs Temperature


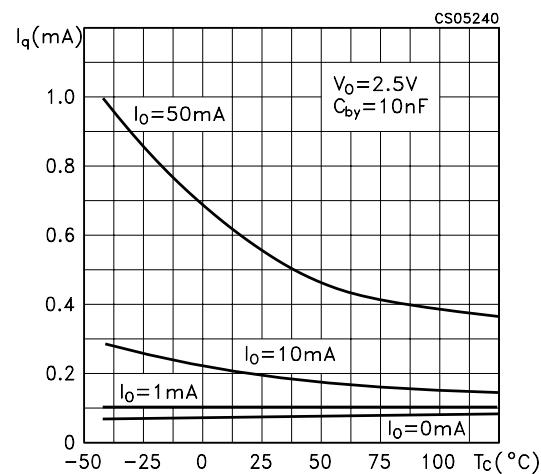


Figure 6 : Supply Voltage Rejection vs Temperature

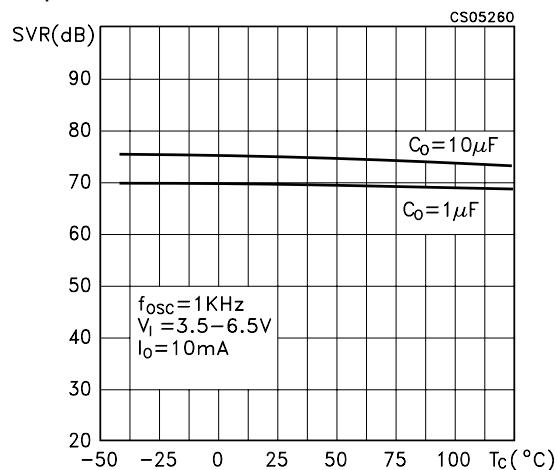

LD2982 SERIES

Figure 7 : Supply Voltage Rejection vs Output Current

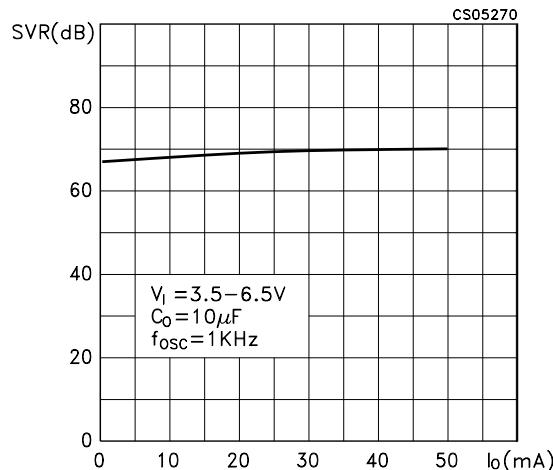


Figure 8 : Supply Voltage Rejection vs Output Current

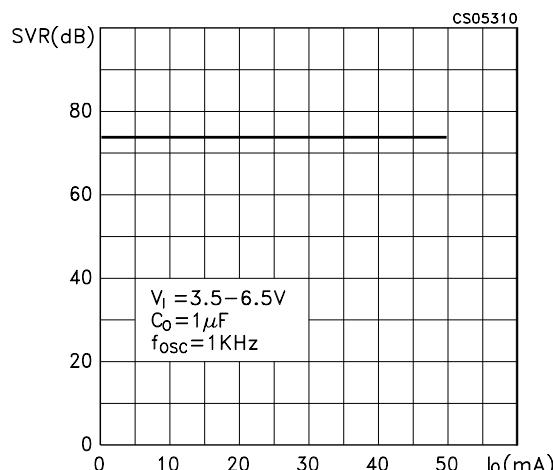


Figure 9 : Supply Voltage Rejection vs Frequency

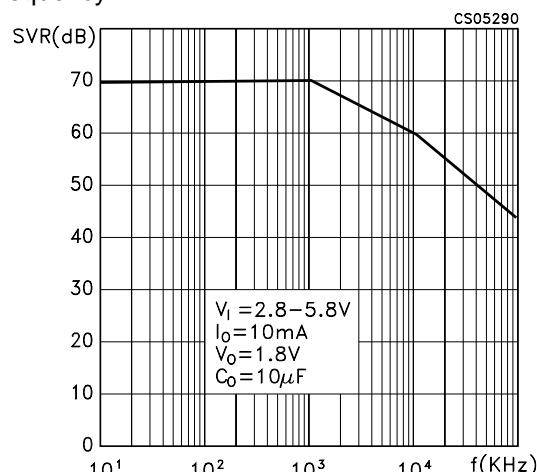


Figure 10 : Supply Voltage Rejection vs Frequency

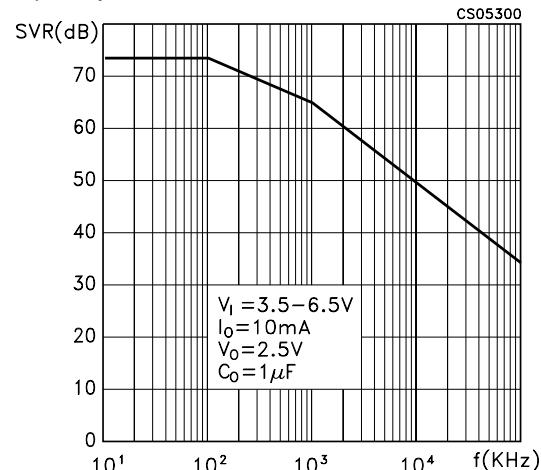


Figure 11 : Line Transient

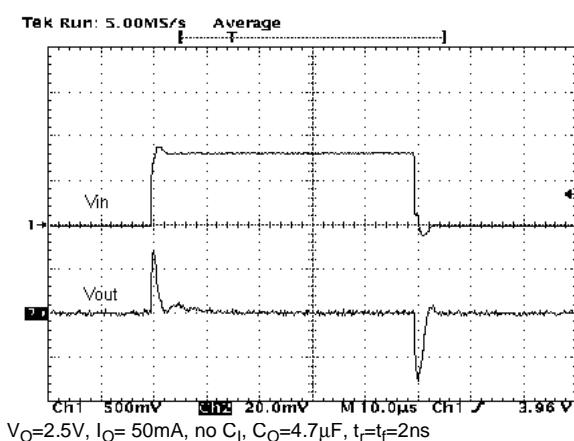


Figure 12 : Line Transient

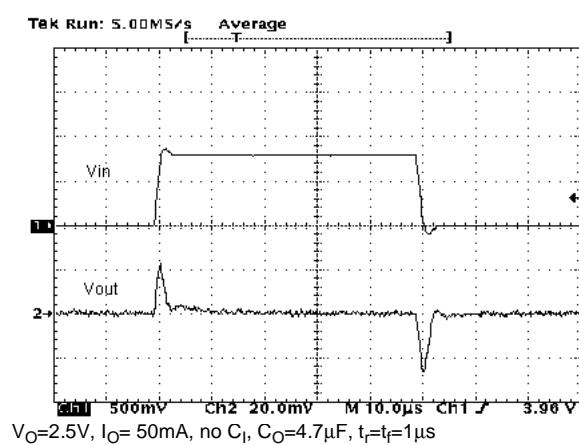
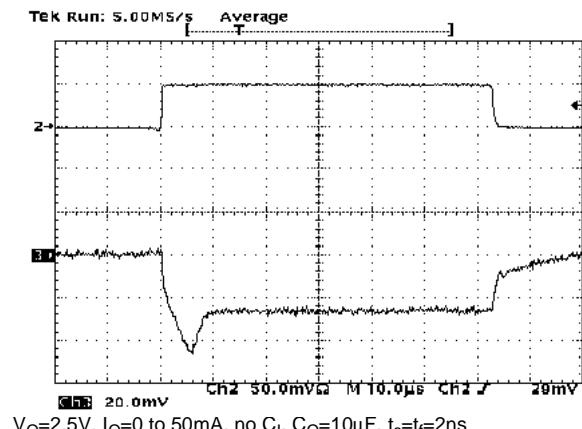
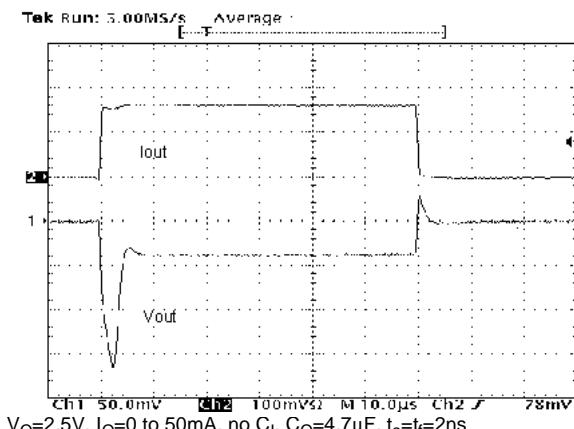


Figure 13 : Load Transient


$V_O = 2.5V$, $I_O = 0$ to $50mA$, no C_L , $C_O = 10\mu F$, $t_s = t_f = 2ns$

Figure 14 : Load Transient

$V_O = 2.5V$, $I_O = 0$ to $50mA$, no C_L , $C_O = 4.7\mu F$, $t_s = t_f = 2ns$


SOT23-5L MECHANICAL DATA

| DIM. | mm. | | | mils | | |
|------|------|------|------|-------|------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 0.90 | | 1.45 | 35.4 | | 57.1 |
| A1 | 0.00 | | 0.15 | 0.0 | | 5.9 |
| A2 | 0.90 | | 1.30 | 35.4 | | 51.2 |
| b | 0.35 | | 0.50 | 13.7 | | 19.7 |
| C | 0.09 | | 0.20 | 3.5 | | 7.8 |
| D | 2.80 | | 3.00 | 110.2 | | 118.1 |
| E | 2.60 | | 3.00 | 102.3 | | 118.1 |
| E1 | 1.50 | | 1.75 | 59.0 | | 68.8 |
| e | | 0.95 | | | 37.4 | |
| e1 | | 1.9 | | | 74.8 | |
| L | 0.35 | | 0.55 | 13.7 | | 21.6 |

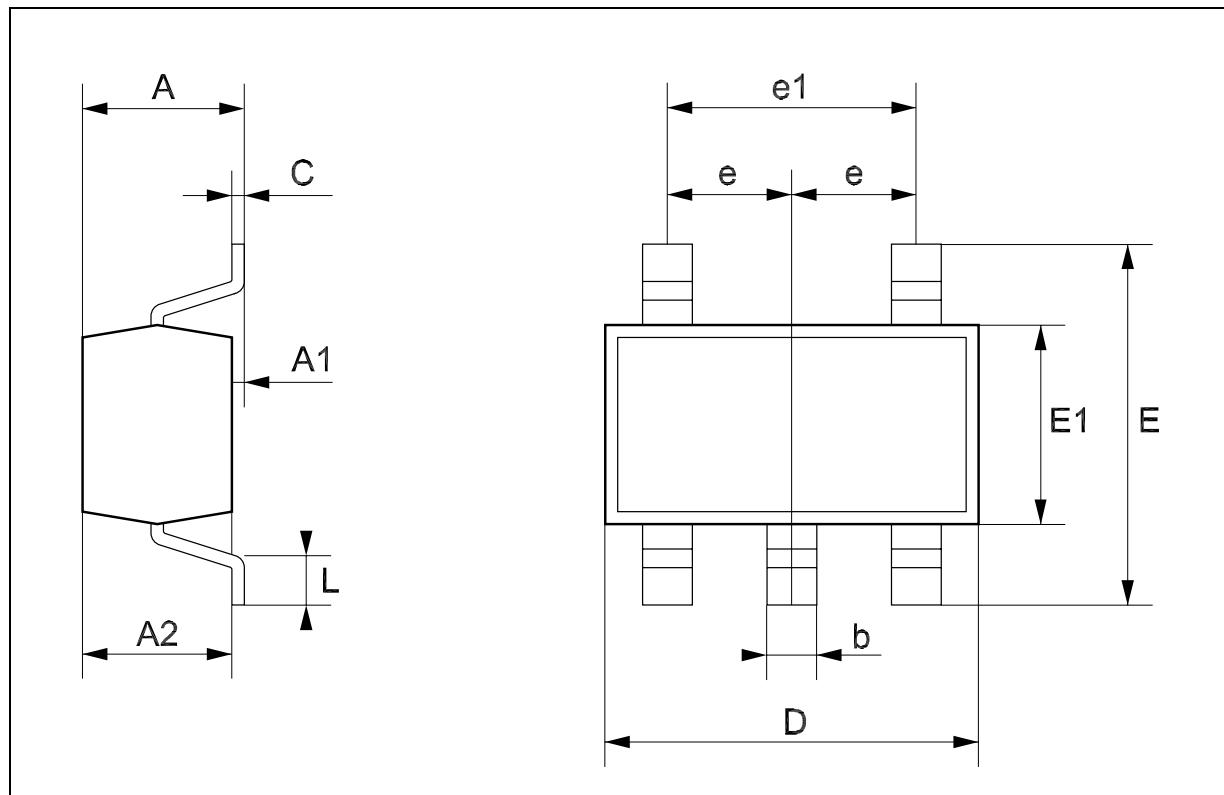

Tape & Reel SOT23-xL MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 180 | | | 7.086 |
| C | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 14.4 | | | 0.567 |
| Ao | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po | 3.9 | 4.0 | 4.1 | 0.153 | 0.157 | 0.161 |
| P | 3.9 | 4.0 | 4.1 | 0.153 | 0.157 | 0.161 |

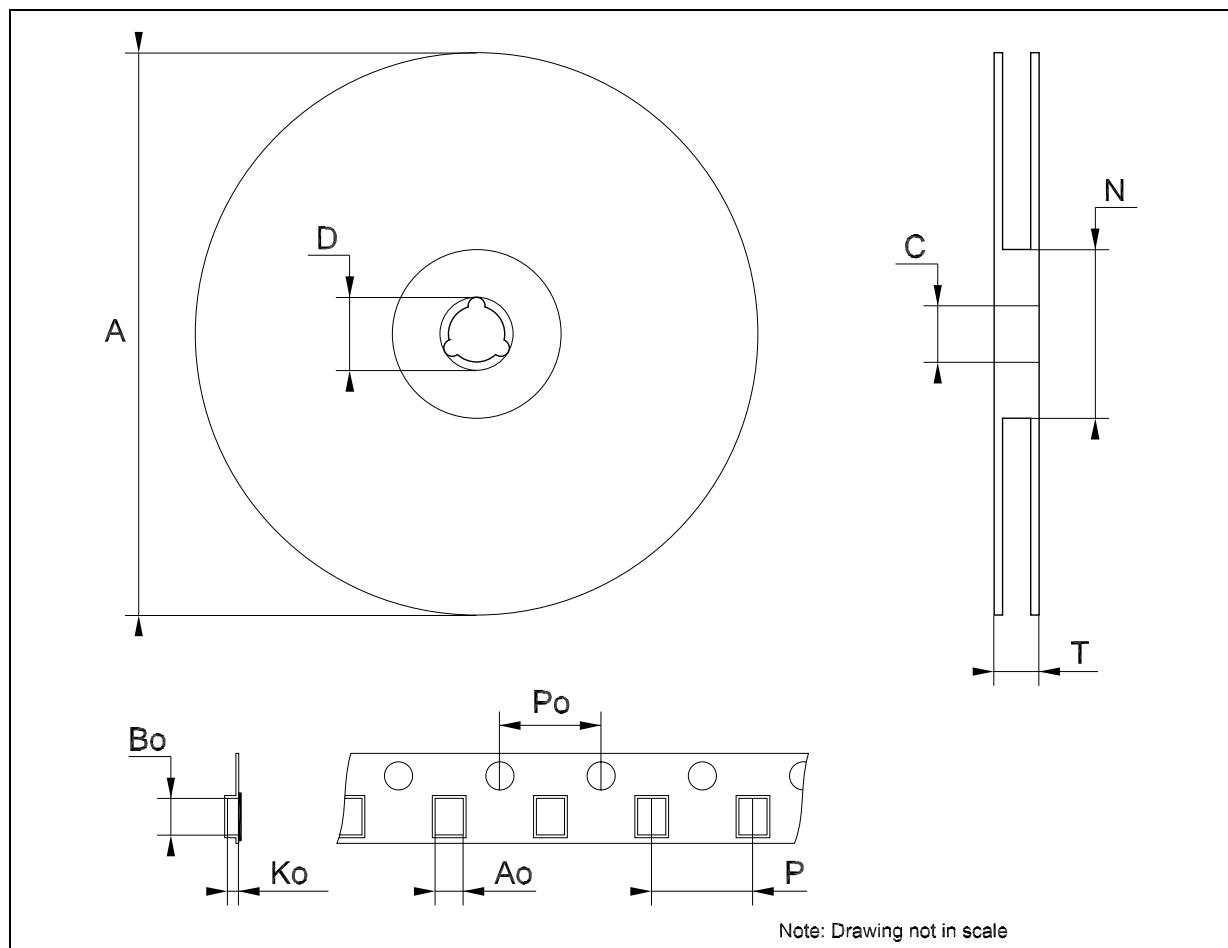

LD2982 SERIES

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>