


PRODUCT SPECIFICATION

DATE:05/13/2010


| | | | |
|---|--|--------------|-----|
|  | Photocoupler: <h2 style="text-align: center;">KTLP350S</h2> | No.61P32002 | Rev |
| | | SHEET 1 OF 8 | 1 |

※THE KTLP350 BUILT- IN DIRECT DRIVE CIRCUIT FOR GATE DRIVING CIRCUIT OF IGBT OR POWER MOSFET.

• Feature:

1. This unit is 8.lead SMD package.
2. Input threshold current: $I_F=5\text{mA}(\text{max.})$
3. Supply current (I_{CC}): $3\text{mA}(\text{max.})$
4. Supply voltage (V_{CC}): $10 - 30\text{V}$
5. Output current (I_O): $\pm 2.5\text{A}(\text{max.})$
6. Switching time (t_{pLH}/t_{pHL}): $0.5\mu\text{s}(\text{max.})$
7. Isolation voltage: $5000\text{Vrms}(\text{min.})$

■ Functional Diagram

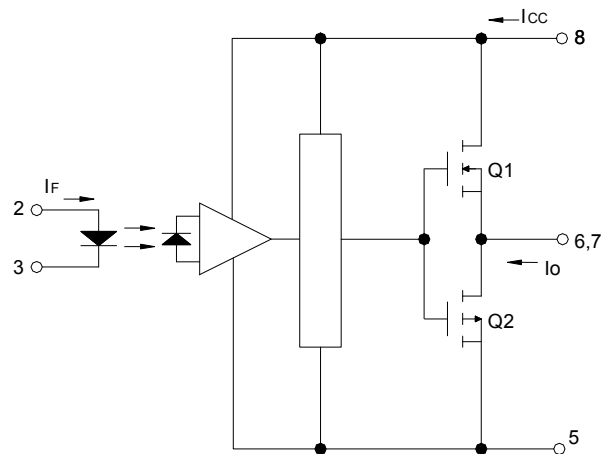

• Applications:

1. Transistor Inverter
2. Inverter For Air Conditionor
3. IGBT Gate Drive
4. Power MOS FET Gate Drive
5. IH(Induction Heating)

■ Truth Table

| LED | OUTPUT | Q1 | Q2 |
|-----|------------|-----|-----|
| ON | HIGH LEVEL | ON | OFF |
| OFF | LOW LEVEL | OFF | ON |


* The use of a $0.1\mu\text{F}$ bypass capacitor must be connected between pins 8 and 5 is recommended.

PRODUCT SPECIFICATION

DATE:05/13/2010


| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 2 OF 8 | 1 |

1. Output Dimensions : Unit (mm)

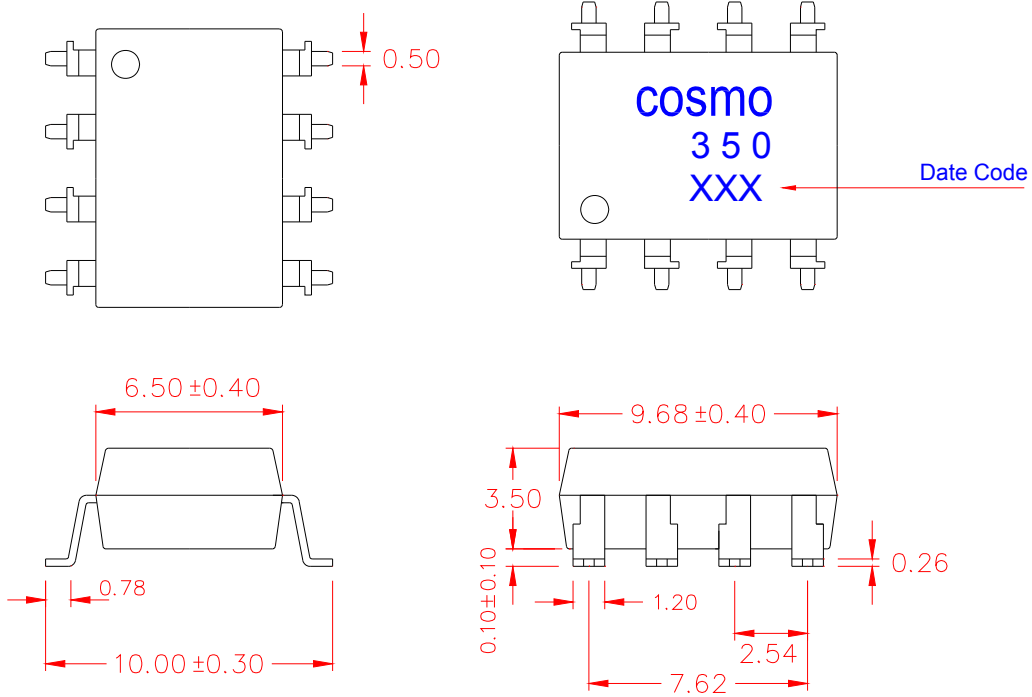

Tolerance : ± 0.2 mm

2. KTLP350 Top View:

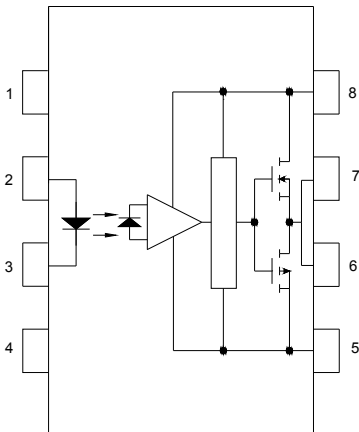

| | |
|--------|---------------------|
| Pin 1: | N.C. |
| Pin 2: | Anode |
| Pin 3: | Cathode |
| Pin 4: | N.C. |
| Pin 5: | GND |
| Pin 6: | Vo (Voltage Output) |
| Pin 7: | Vo (Voltage Output) |
| Pin 8: | Vcc |

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 3 OF 8 | 1 |

■ Absolute Maximum Ratings (Ta = 25°C)

| Parameter | | Symbol | Rating | Unit | |
|---|--|---------------------------|------------------------------|---------|--------|
| Input | Forward Current | I_F | 20 | mA | |
| | Forward Current Derating(Ta \geq 70°C) | $\Delta I_F / \Delta T_a$ | -0.54 | mA / °C | |
| | Peak Transient Forward Current (*Note 1) | I_{FPT} | 1 | A | |
| | Reverse Voltage | V_R | 5 | V | |
| | Junction Temperature | T_j | 125 | °C | |
| Output | “H”Peak Output Current (*Note 2) | | I_{OPH} | -2.5 | A |
| | “L”Peak Output Current (*Note 2) | | I_{OPL} | +2.5 | A |
| | Output Voltage | (Ta < 95°C) | V_O | 35 | V |
| | Supply Voltage | (Ta < 95°C) | V_{CC} | 35 | V |
| | Output Voltage Derating (Ta \geq 95°C) | | $\Delta V_O / \Delta T_a$ | -1.0 | V / °C |
| | Supply Voltage Derating(Ta \geq 95°C) | | $\Delta V_{CC} / \Delta T_a$ | -1.0 | V / °C |
| | Junction Temperature | | T_j | 125 | °C |
| Operating Frequency (*Note 3) | | f | 50 | KhZ | |
| Operating Temperature Range | | T_{opr} | -40~100 | °C | |
| Storage Temperature Range | | T_{stg} | -55~125 | °C | |
| Lead Soldering Temperature(10s) (*Note 4) | | T_{sol} | 260 | °C | |
| Isolation Voltage (AC,1min.,R.H \leq 60%) (*Note 5) | | BVs | 5000 | Vrms | |

*Note1:Pulse width $P_w \leq 1\mu s, 300pps$.

*Note2:Exponential waveform pulse width $P_w \leq 0.3\mu s, f \leq 15kHz$.

*Note3:Exponential waveform, $I_{OPH} \geq -2.0A (\leq 0.3\mu s), I_{OPL} \leq +2.0A (\leq 0.3\mu s)$.

*Note4:It IS 2 mm or more from a lead root.

*Note5:Device considered a two terminal device: Pin1,2,3 and 4 shorted together,
and pins 5,6,7 and 8 shorted together.

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 4 OF 8 | 1 |

■ Electrical Characteristics (Ta = -40~100°C, unless otherwise specified)

| Parameter | Symbol | Test Circuit | Test Condition | Min. | Typ. | Max. | Unit | |
|--|----------------------|------------------|----------------------------------|---|------------------|-------|-------|----|
| Input forward voltage | V _F | — | IF=10mA, Ta=25°C | — | 1.6 | 1.8 | V | |
| Temperature coefficient of forward voltage | ΔV _F /ΔTa | — | IF=10mA | — | -2.0 | — | mV/°C | |
| Input reverse current | I _R | — | VR=5V, Ta=25°C | — | — | 10 | μA | |
| Input capacitance | C _T | — | V=0, f=1MHz, Ta=25°C | — | 45 | 250 | pF | |
| Output current (*A) | “H” level | I _{OPH} | 3 | VCC=30V IF=5mA Vb=-3.5V | — | -1.6 | -1.0 | A |
| | | | | VCC=15V IF=5mA Vb=-7.0V | — | — | -2.0 | |
| | “L” level | I _{OPL} | 2 | VCC=30V IF=0mA Va=2.5V | 1.0 | 1.6 | — | |
| | | | | VCC=15V IF=0mA Vb=7.0V | 2.0 | — | — | |
| Output voltage | “H” level | V _{OH} | 4 | VCC1=15V, VEE1=-15V RL=200Ω, IF=5mA | 11 | 13.7 | — | V |
| | “L” level | V _{OL} | 5 | VCC1=15V, VEE1=-15V RL=200Ω, VF=0.8V | — | -14.9 | -12.5 | |
| Supply current | “H” level | I _{CCH} | — | VCC=30V, IF=10mA, Ta=25°C | — | 2 | 3.0 | mA |
| | “L” level | I _{CCL} | — | VCC=30V, IF=0mA, Ta=25°C | — | 2 | 3.0 | |
| Threshold input current | “Output L→H” | I _{FLH} | — | VCC=15V, Vo>1V, Io=0mA | — | 1.8 | 5 | mA |
| Threshold input voltage | “Output H→L” | V _{FHL} | — | VCC=15V, Vo>1V, Io=0mA | 0.8 | — | — | V |
| Supply voltage | V _{CC} | — | — | 10 | — | 30 | V | |
| Capacitance (input-output) | C _S | — | Vs=0, f=1MHz, Ta=25°C | — | 1.0 | 2.0 | pF | |
| Resistance (input-output) | R _S | — | Vs=500V, Ta=25°C , R.H. ≤ 60% | 1*10 ¹² | 10 ¹⁴ | — | Ω | |

* All typical values are at Ta=25°C (*A):Duration of I_o time ≤ 50μs(1 Pulse)

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 5 OF 8 | 1 |

■ Switching Characteristics (Ta = -20~70°C, unless otherwise specified)


| Parameter | | Symbol | Test Circuit | Test Condition | Min. | Typ. | Max. | Unit |
|---|-------|-----------|--------------|---|------|------|------|---------|
| Propagation delay time | "L→H" | t_{pLH} | 6 | IF=5mA (Note8) VCC=30V Rg=20Ω, Cg=10nF | 50 | 260 | 500 | ns |
| | "H→L" | t_{pHL} | | | 50 | 260 | 500 | |
| Output rise time | | t_r | | | — | 15 | — | |
| Output fall time | | t_f | | | — | 8 | — | |
| Common mode transient immunity at high level output | | C_{MH} | 7 | $V_{CM}=1000Vp-p, I_F=5mA$ $V_{CC}=30V, V_o(min)=26V$ Ta=25°C | -15 | — | — | KV / μs |
| Common mode transient immunity at low level output | | C_{ML} | 7 | $V_{CM}=1000Vp-p, I_F=0$ $V_{CC}=30V, V_o(max)=1V$ Ta=25°C | 15 | — | — | KV / μs |

* All typical values are at Ta=25°C.

*Note 8: Input signal rise time (fall time) < 0.5μs.

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
|  | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 6 OF 8 | 1 |

■ Test Circuit:

Fig.1 : Top View

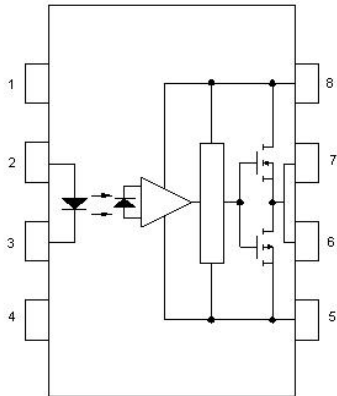


Fig.2 : I_{OPL} Measure.

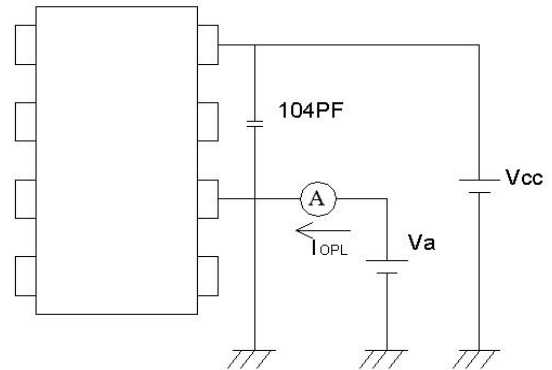


Fig.3 : I_{OPH} Measure.

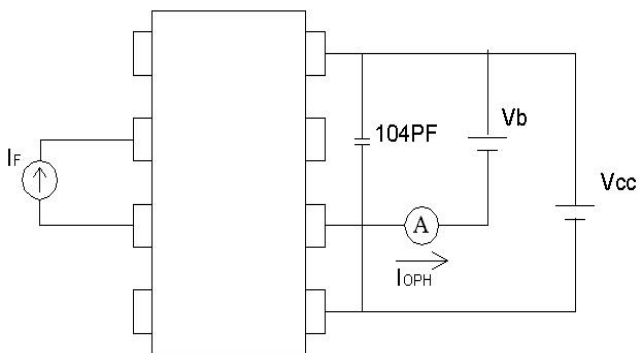


Fig.4 : V_{OH} Measure.


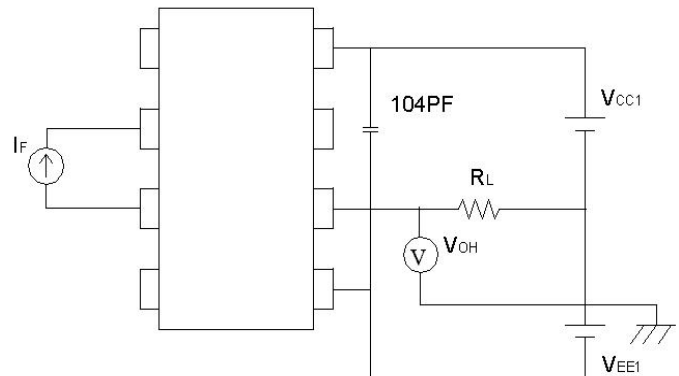


Fig.5 : V_{OL} Measure.

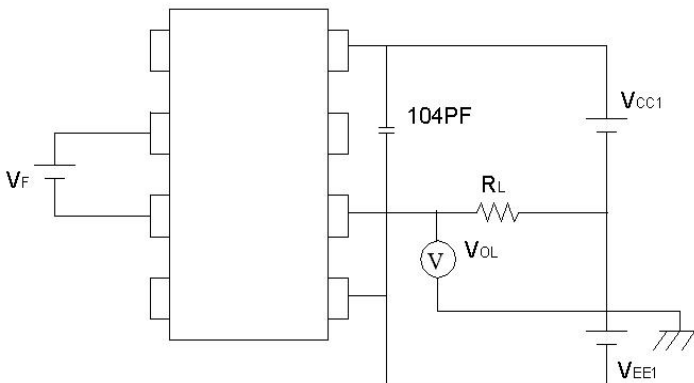

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 7 OF 8 | 1 |

Fig.6: $t_{pLH}, t_{pHL}, t_r, t_f$ Measure.


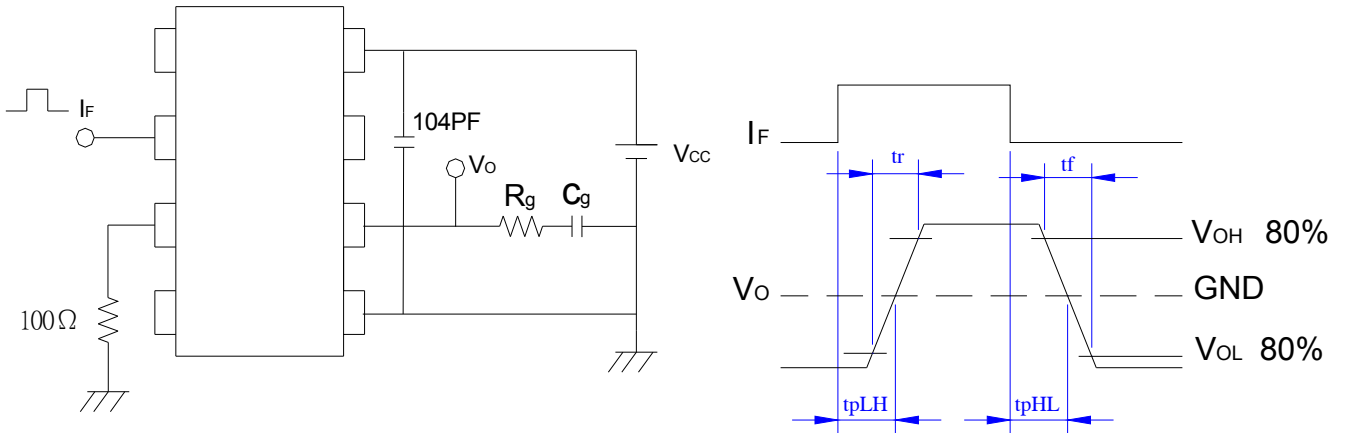


Fig.7: C_{MH}, C_{ML} .

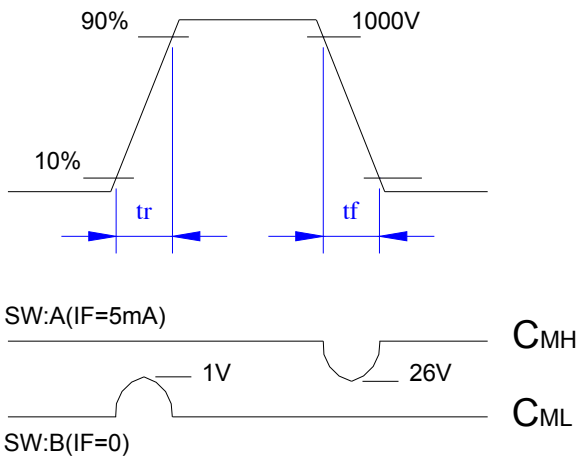

$$C_{ML} = \frac{800(V)}{t_r (\mu s)} \quad ; \quad C_{MH} = \frac{800(V)}{t_f (\mu s)}$$

*CML(CMH) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

PRODUCT SPECIFICATION

DATE:05/13/2010

| | | | |
|---|----------------------------------|--------------|-----|
| cosmo ELECTRONICS CORPORATION | Photocoupler: KTLP350S | No.61P32002 | Rev |
| | | SHEET 8 OF 8 | 1 |

NOTICE

The information contained in this document is a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. Cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo. cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices