


## General Description

The AOT2606L & AOB2606L & AOTF2606L uses Trench MOSFET technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of  $R_{DS(ON)}$ , Ciss and Coss. This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.

## Features

$V_{DS}$   
 $I_D$  (at  $V_{GS}=10V$ )  
 $R_{DS(ON)}$  (at  $V_{GS}=10V$ )

60V  
 72A  
 $< 6.5m\Omega$  ( $< 6.2m\Omega^*$ )



**Absolute Maximum Ratings  $T_A=25^\circ C$  unless otherwise noted**

Parameter	Symbol	AOT2606L/AOB2606L	AOTF2606L	Units
Drain-Source Voltage	$V_{DS}$	60		V
Gate-Source Voltage	$V_{GS}$	$\pm 20$		V
Continuous Drain Current <sup>G</sup>	$I_D$	72	54	A
$T_C=100^\circ C$		56	38	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	260		A
Continuous Drain Current <sup>C</sup>	$I_{DSM}$	13		A
$T_A=70^\circ C$		10		
Avalanche Current <sup>C</sup>	$I_{AS}$	60		A
Avalanche energy $L=0.1mH$ <sup>C</sup>	$E_{AS}$	180		mJ
Power Dissipation <sup>B</sup>	$P_D$	115	36.5	W
$T_C=100^\circ C$		57.5	18	
Power Dissipation <sup>A</sup>	$P_{DSM}$	2.1		W
$T_A=70^\circ C$		1.3		
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 175		°C

**Thermal Characteristics**

Parameter	Symbol	AOT2606L/AOB2606L	AOTF2606L	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{\theta JA}$	15	15	°C/W
Steady-State		60	60	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	1.3	4.1	°C/W

\* Surface mount package TO263

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	60			V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{DS}=60\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			$\pm 100$	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.5	3	3.5	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	260			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=20\text{A}$		5.4	6.5	$\text{m}\Omega$
		TO220/TO220F $T_J=125^\circ\text{C}$		8.5	10.5	
		$V_{GS}=10\text{V}, I_D=20\text{A}$ TO263		5.1	6.2	
$g_{\text{FS}}$	Forward Transconductance	$V_{DS}=5\text{V}, I_D=20\text{A}$		75		S
$V_{\text{SD}}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.7	1	V
$I_s$	Maximum Body-Diode Continuous Current <sup>G</sup>				72	A
<b>DYNAMIC PARAMETERS</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=30\text{V}, f=1\text{MHz}$		4050		pF
$C_{\text{oss}}$	Output Capacitance			345		pF
$C_{\text{rss}}$	Reverse Transfer Capacitance			16.8		pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	0.3	0.65	1.0	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=30\text{V}, I_D=20\text{A}$		53	75	nC
$Q_g(4.5\text{V})$	Total Gate Charge			22	31	nC
$Q_{\text{gs}}$	Gate Source Charge			17		nC
$Q_{\text{gd}}$	Gate Drain Charge			5		nC
$t_{\text{D(on)}}$	Turn-On DelayTime	$V_{GS}=10\text{V}, V_{DS}=30\text{V}, R_L=1.5\Omega, R_{\text{GEN}}=3\Omega$		18		ns
$t_r$	Turn-On Rise Time			20		ns
$t_{\text{D(off)}}$	Turn-Off DelayTime			33		ns
$t_f$	Turn-Off Fall Time			4		ns
$t_{\text{rr}}$	Body Diode Reverse Recovery Time	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		26		ns
$Q_{\text{rr}}$	Body Diode Reverse Recovery Charge	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		125		nC

A. The value of  $R_{\theta JA}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The Power dissipation  $P_{\text{DSM}}$  is based on  $R_{\theta JA}$  and the maximum allowed junction temperature of  $150^\circ\text{C}$ . The value in any given application depends on the user's specific board design, and the maximum temperature of  $175^\circ\text{C}$  may be used if the PCB allows it.

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=175^\circ\text{C}$ , using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=175^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{\theta JC}$  is the sum of the thermal impedance from junction to case  $R_{\theta JC}$  and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 $\mu\text{s}$  pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=175^\circ\text{C}$ . The SOA curve provides a single pulse rating.

G. The maximum current limited by package.

H. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ .

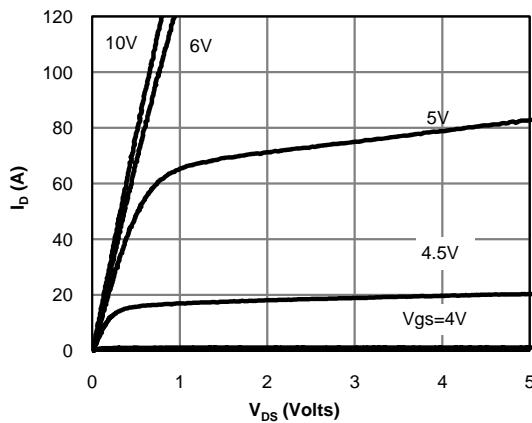
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


Fig 1: On-Region Characteristics (Note E)

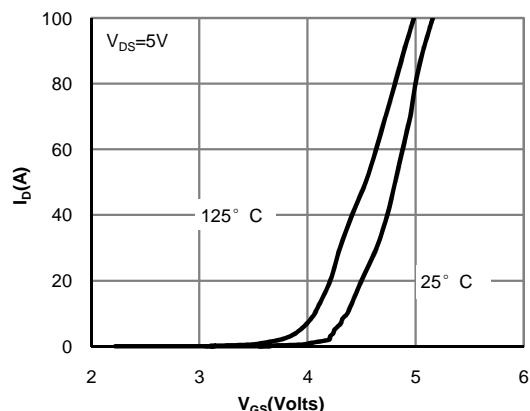


Figure 2: Transfer Characteristics (Note E)

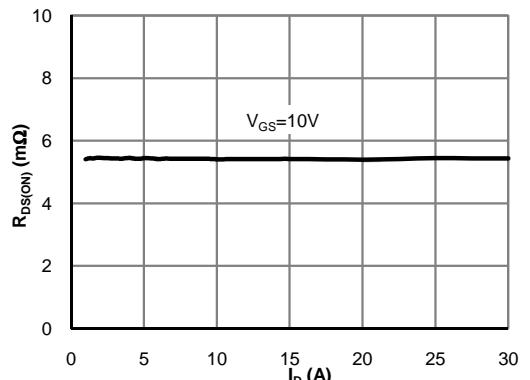


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

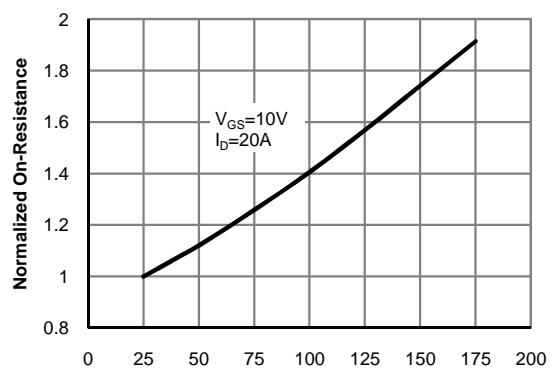


Figure 4: On-Resistance vs. Junction Temperature (Note E)

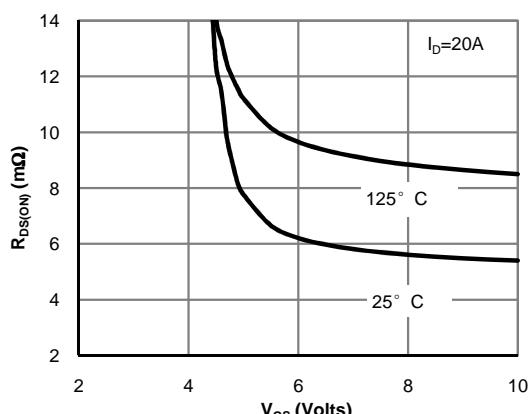


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

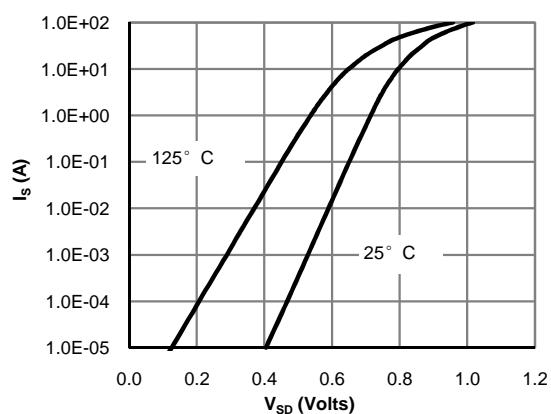


Figure 6: Body-Diode Characteristics (Note E)

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

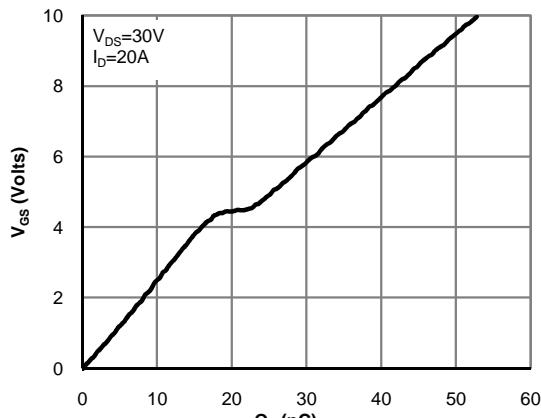


Figure 7: Gate-Charge Characteristics

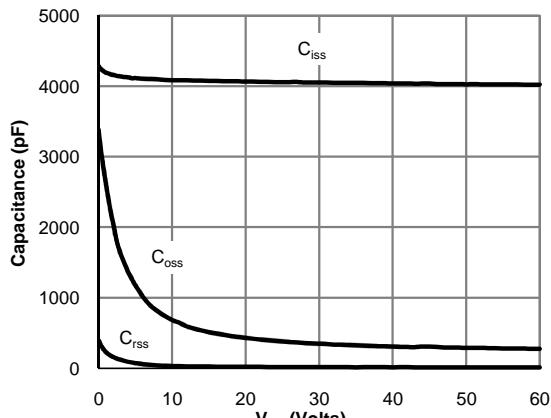


Figure 8: Capacitance Characteristics

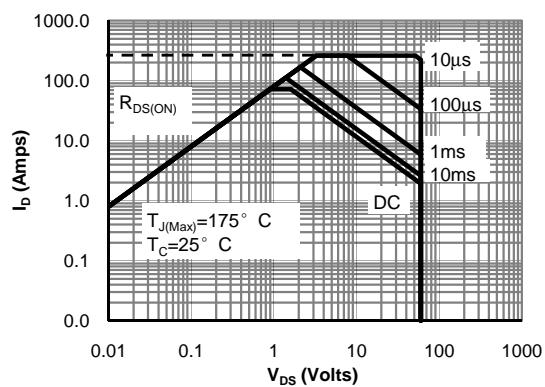


Figure 9: Maximum Forward Biased Safe Operating Area for AOT2606L and AOB2606L (Note F)

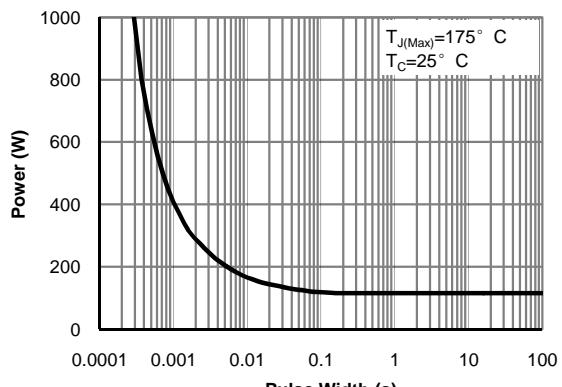


Figure 10: Single Pulse Power Rating Junction-to-Case for AOT2606L and AOB2606L (Note F)

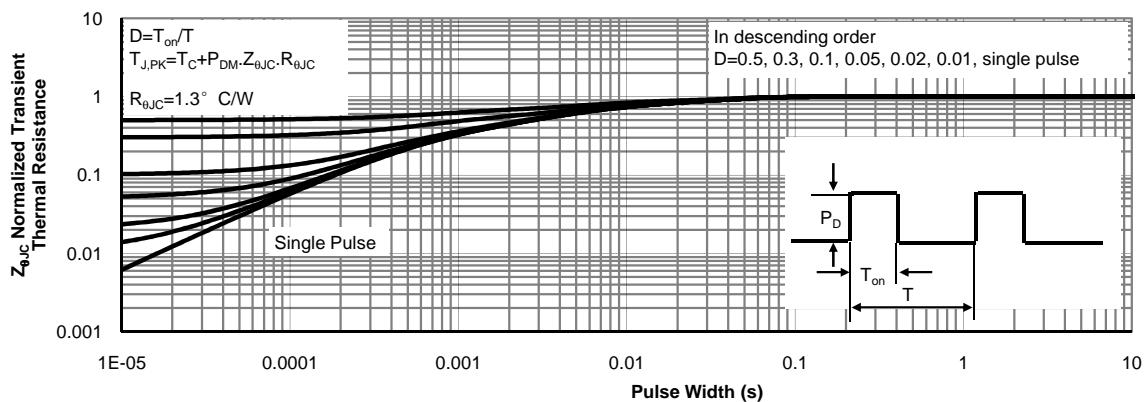
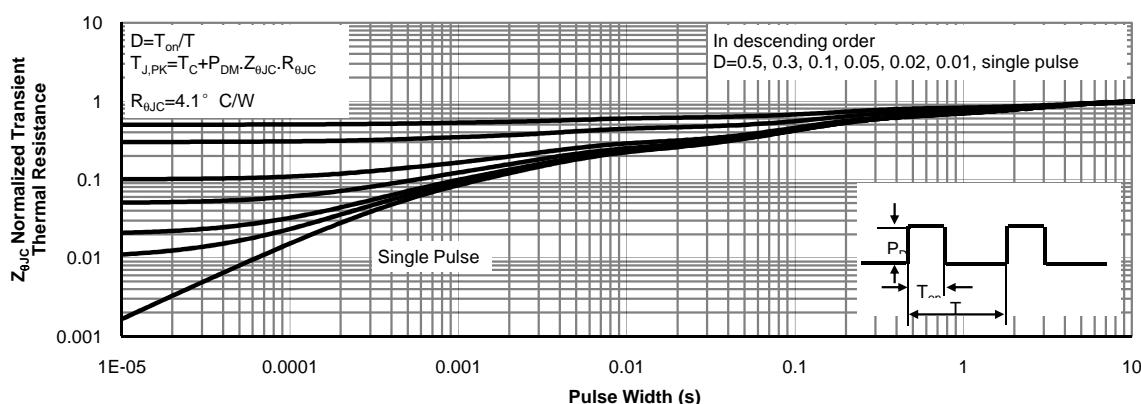
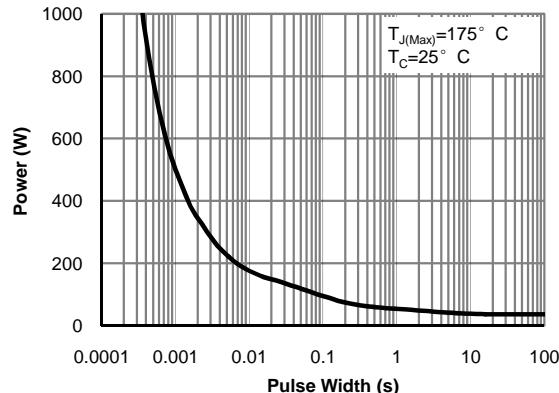
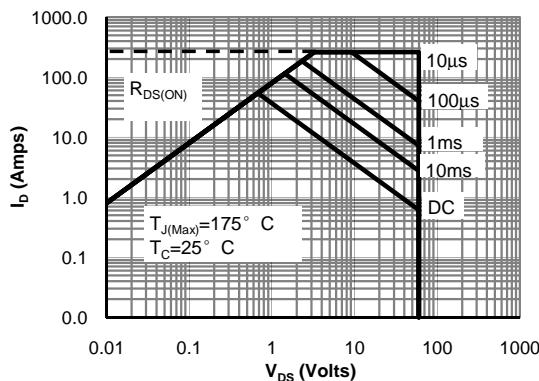


Figure 11: Normalized Maximum Transient Thermal Impedance for AOT2606L and AOB2606L (Note F)

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


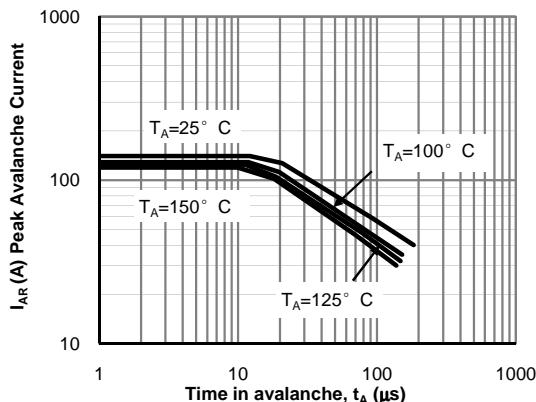
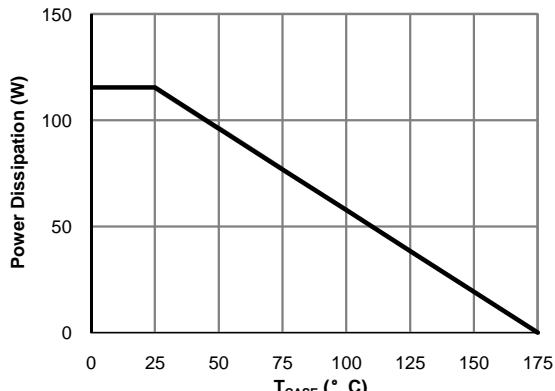
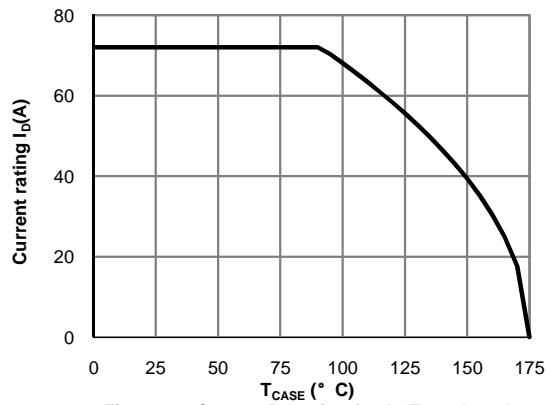
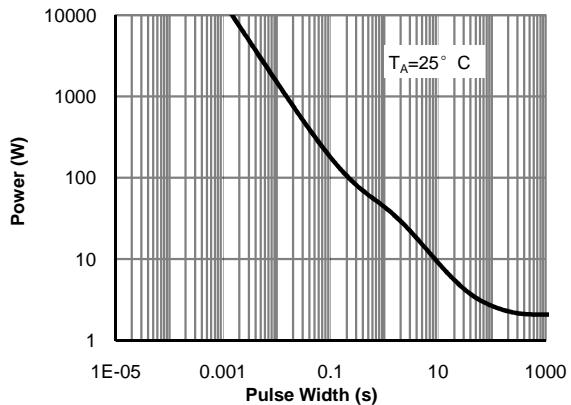
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

 Figure 12: Single Pulse Avalanche capability  
 (Note C)

 Figure 13: Power De-rating for AOT2606L and  
 AOB2606L (Note F)

 Figure 14: Current De-rating for AOT2606L and  
 AOB2606L (Note F)


Figure 15: Single Pulse Power Rating Junction-to-Ambient (Note H)



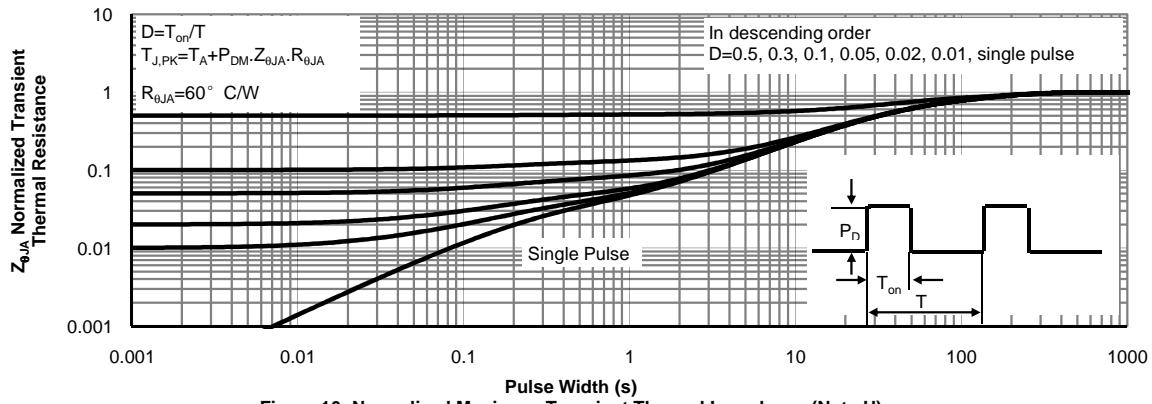


Figure 16: Normalized Maximum Transient Thermal Impedance (Note H)


Gate Charge Test Circuit & Waveform

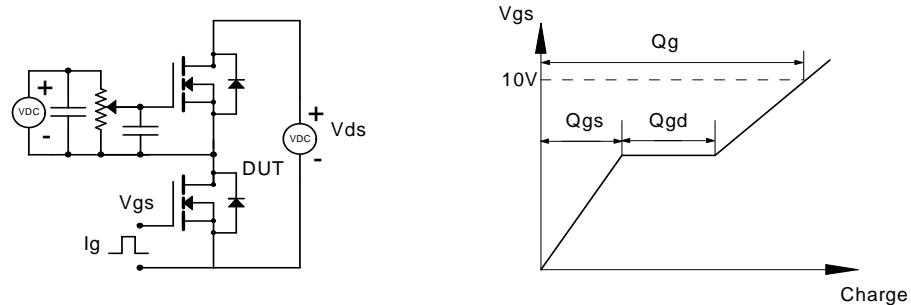

Resistive Switching Test Circuit & Waveforms

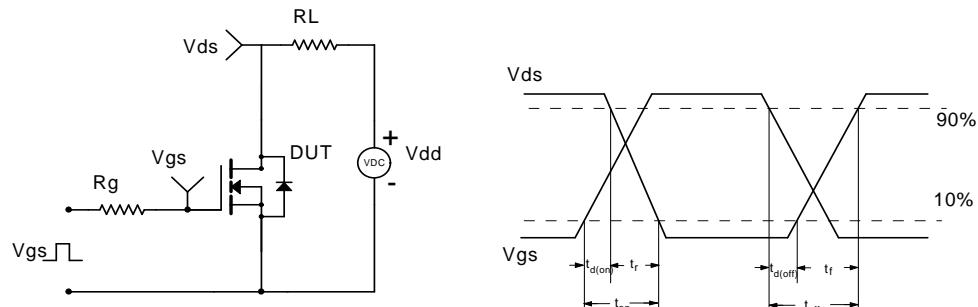

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

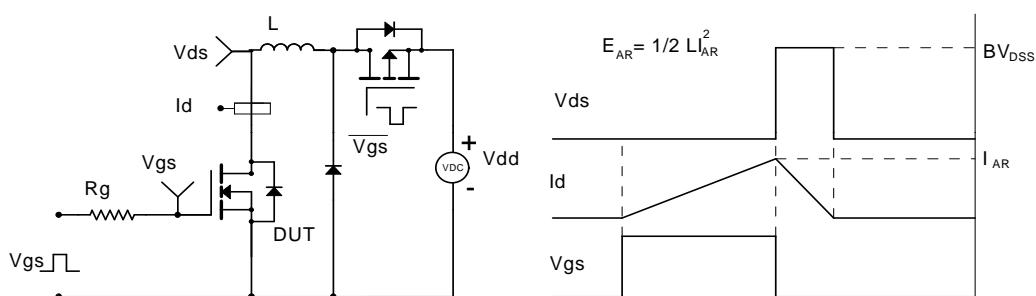

Diode Recovery Test Circuit & Waveforms

