

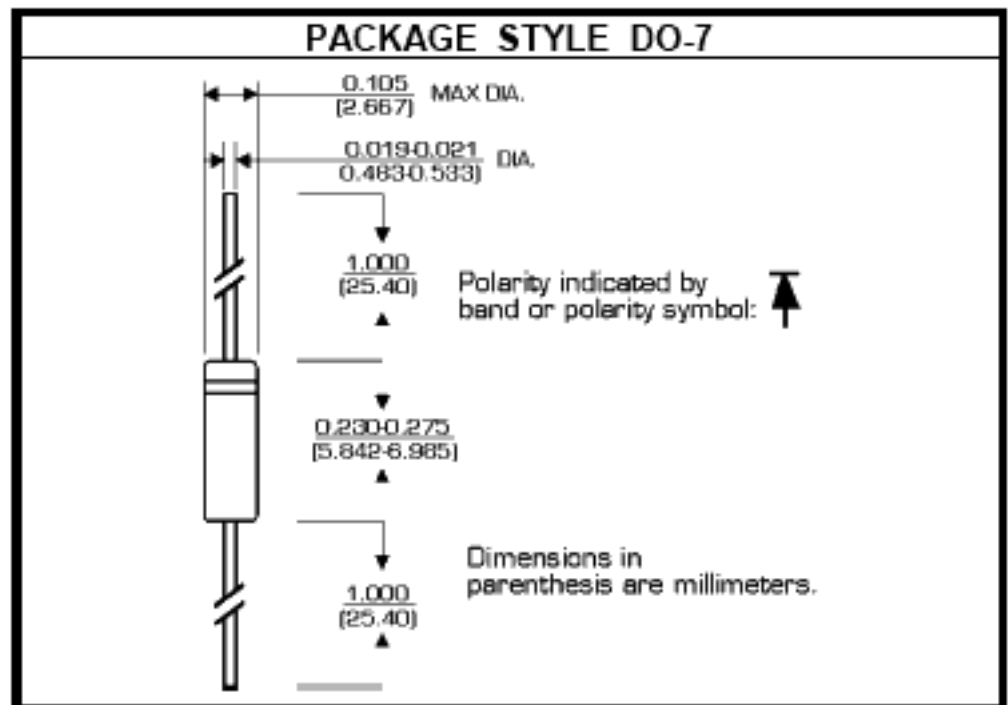
SILICON HYPERABRUPT TUNING VARACTOR

DESCRIPTION:

The **ASI KV2101A** is a Silicon Hyperabrupt Tuning Varactor Diode Designed for UHF Applications up to 800 MHz. The Cathode is Indicated by a Color Band.

MAXIMUM RATINGS

I_F	40 mA
V_R	22 V
P_{DISS}	200 mW @ $T_A = 25\text{ }^\circ\text{C}$
T_J	-55 $^\circ\text{C}$ to +175 $^\circ\text{C}$
T_{STG}	-55 $^\circ\text{C}$ to +175 $^\circ\text{C}$


CHARACTERISTICS $T_A = 25\text{ }^\circ\text{C}$

SYMBOL	TEST CONDITIONS		MINIMUM	TYPICAL	MAXIMUM	UNITS
V_R	$I_R = 10\text{ }\mu\text{A}$		22			V
I_R	$V_R = 20\text{ V}$				100	μA
C_{T3}	$V_R = 3.0\text{ V}$	$f = 1.0\text{ MHz}$	10.9	11.5	12.1	pF
C_{T8}	$V_R = 8.0\text{ V}$	$f = 1.0\text{ MHz}$	4.6	5.0	5.4	pF
C_{T20}	$V_R = 20\text{ V}$	$f = 1.0\text{ MHz}$	2.0	2.15	2.3	pF
ΔC_T	$V_R = 3\text{ to }20\text{ V}$	$f = 1.0\text{ MHz}$	5.0	5.5	5.8	RATIO
Q	$V_R = 3.0\text{ V}$	$f = 50\text{ MHz}$	300			