12V 40W / MDS-040APS12 BA



040APS

Highlights & Features

- Compliant to IEC 60601-1 3rd edition
- IT and medical safety approvals
- Low earth leakage Current (<0.1mA)
- Overload, over voltage, over temperature and short circuit protections
- Risk management report available

Safety Standards



CB Certified for worldwide use

Model Number: MDS-040APS12 BA

Unit Weight: 0.08 kg

Dimensions (W x L x H): 50.8x76.2x23 mm

2x3x0.91 in

General Description

The MDS series of embedded power supply comes with universal AC input at 90Vac to 264Vac. Other features include low earth leakage, risk management report available and the electric shock protection comply with 2 x MOPP. The MDS series is certified for EMC standards according to EN 55011 for industrial, scientific and medical (ISM) radio-frequency equipment and EN 55022 for Infomation Technology Equipment (ITE) radio-frequency equipment. In addition, only recognized Japanese capacitors are used.

The MDS series come with both medical and ITE safety approvals including UL/CSA/CQC /CE and CB certification and are fully compliant with RoHS Directive 2011/65/EU for environmental protection.

Model Information

MDS Medical AC-DC Adapter

| Model Number | Input Voltage Range | Output Voltage | Output Current |
|--------------|---------------------|----------------|----------------|
| 040APS12 BA | 90-264Vac | 12Vdc | 3.33A |

Model Numbering

| MDS | 040 | Α | Р | S | 12 | В | А |
|-------------------------------|--|---------------------|----------------------------|--|--|--|--|
| Delta Medical power Supply | Max wattage in the product Series. Maybe lower at some voltage. 060 → 60W 120 →120W 1K2 → 1,200W | Family Code A∼ Z | Product Type P: Open Frame | Output Code S: Single Output 2: Dual Output 3: Triple Output 4: Four Output 5: More than Five Output | Output Voltage Single Output: - 03 for 3.3V - 05 for 5V - 12 for 12V Multiple Output: Serial Number 00 to 99 | Input Connector code A: Class II, STD Connector B: Class I, STD Connector | Output Connector code A: STD Connector |



12V 40W / MDS-040APS12 BA

Specifications

Input Ratings / Characteristics

| Nominal Input Voltage | 100-240Vac |
|------------------------------|--|
| Input Voltage Range | 90-264Vac |
| Nominal Input Frequency | 50-60Hz |
| Input Frequency Range | 47-63Hz |
| Input Current (max.) | 0.85A @ 115V |
| Efficiency (typ.) | 86.5%, Reference Fig.1 |
| Standby Power (max.) | 0.3W |
| Inrush Current (typ.) | 30A @ 115Vac, 60A @ 230Vac |
| Earth Leakage Current (max.) | 0.1mA @ 264Vac NC ¹⁾ , 0.3mA @ 264Vac SFC ²⁾ |
| | |

¹⁾ NC: normal condition 2) SFC: single fault condition

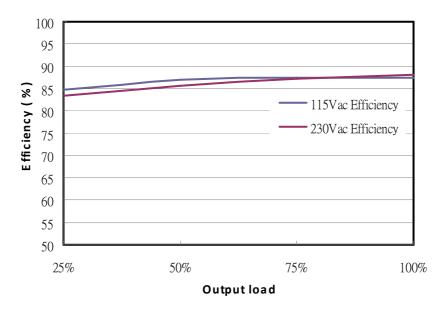


Fig.1 Efficiency versus output load

Output Ratings / Characteristics

| 12Vdc ± 5% 3.33A |
|--|
| |
| 3 33A |
| 0.007 |
| 40W |
| ±0.5% |
| ±1% |
| 22.8mV pk-pk @ Full load, Reference Fig. 2 |
| 3000ms @ 115Vac |
| 15ms @ 115Vac |
| ± 3% @ 50-100% load |
| 4 4 3 |



12V 40W / MDS-040APS12 BA


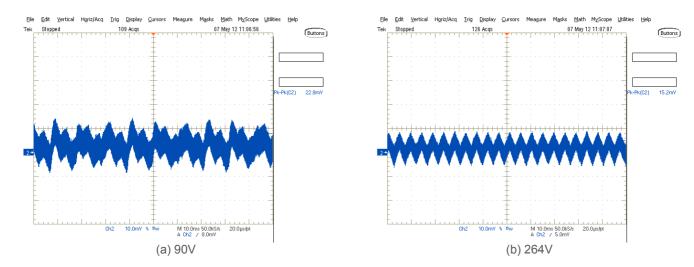


Fig. 2 Ripple & Noise example, 20MHz BW

Ripple & Noise measurement circuit

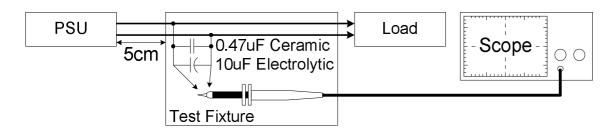

Mechanical

| Case Chassis | NA |
|----------------------|----------------------------------|
| Case Cover | NA |
| Dimensions(W x Lx H) | 50.8x76.2x23 mm (2.0x3.0x0.9 in) |
| Weight (typ.) | 0.08 kg |
| Indicator | NA |
| Terminal Input | JST 2P |
| Output | JST 4P |
| Wire | NA |

Environment

| Surrounding Air Temperature | Operating | -10°C to +70°C |
|-----------------------------|-----------|---|
| | Storage | -40°C to +85°C |
| Power De-rating | | -10°C to +50°C 100% load |
| | | 50°C to 70°C de-rate power by 2.5% / °C, See Fig. 3 |
| Operating Humidity | | 10-95% RH (Non-Condensing) |
| Operating Altitude | | 3,000 meters |
| Shock Test (Non-Operating) | | 50G, 11ms, 3 shocks for each direction |
| Vibration (Operating) | | 5-500Hz, 2.09Grms, 20 minute for each three axis |



12V 40W / MDS-040APS12 BA

Protections

| Over voltage (max) | 150%, Latch Mode |
|--------------------------|---|
| Over load / Over current | 150%~210% of rated load current, Hiccup Mode, |
| | (Non-Latching, Auto-Recovery) |
| Over Temperature | Hiccup Mode, |
| | (Non-Latching, Auto-Recovery) |
| Short Circuit | Hiccup Mode, |
| | (Non-Latching, Auto-Recovery) |
| Protection Against Shock | Class I with PE* connection |

^{*}PE: Protective Earth

Reliability Data

| MTBF (typ.) | 3685 kHrs based on Telecordia SR-332 |
|-------------|--------------------------------------|

Safety Standards / Directives

| Medical Safety | | IEC60601-1: (Ed.3,2005), EN0601-1:2006, CAN/CSA-C22.2 No. 60601-1:08, ANSI/AAMI ES60601-1: (Ed.3,2005) |
|--------------------|------------------|--|
| ITE Safety | | IEC60950-1 (Ed.2,2005), GB4943.1-2011, GB9254-2008, GB17625.1-2003 |
| CE | | MDD Directive 93/42/EEC |
| Material and Parts | | RoHS Directive 2011/65/EU Compliant |
| Galvanic Isolation | Input to Output | 4000 Vac |
| | Input to Ground | 1500 Vac |
| | Output to Ground | 500 Vac |



12V 40W / MDS-040APS12 BA


EMC

| EMC / Emissions | | EN55011, EN55022, FCC Title 47: Class B |
|-----------------------------------|---------------|--|
| Immunity to | | |
| Voltage Flicker | IEC61000-3-3 | |
| Electrostatic Discharge | IEC61000-4-2 | Level 3 Criteria A ¹⁾ Air Discharge: 8kV Contact Discharge: 6kV |
| Radiated Field | IEC61000-4-3 | Level 2 Criteria A ¹⁾ 80MHz-1GHz, 3V/M with 1kHz tone / 80% modulation |
| Electrical Fast Transient / Burst | IEC61000-4-4 | Level 3 Criteria A ¹⁾ 2kV |
| Surge | IEC61000-4-5 | Level 3 Criteria A ¹⁾ Common Mode ²⁾ : 2kV Differential Mode ³⁾ : 1kV |
| Conducted | IEC61000-4-6 | Level 2 Criteria A ¹⁾ 150kHz-80MHz, 3Vrms |
| Power Frequency Magnetic Fields | IEC61000-4-8 | Criteria A ¹⁾ Magnetic field strength 3A/Meter |
| Voltage Dips | IEC61000-4-11 | 30% 10ms Criteria A ; 60% 100ms and 100% 5000ms Criteria B |

¹⁾ Criteria A: Normal performance within the specification limits

- 2) Asymmetrical: Common mode (Line to earth) 3) Symmetrical: Differential mode (Line to line)

Block Diagram

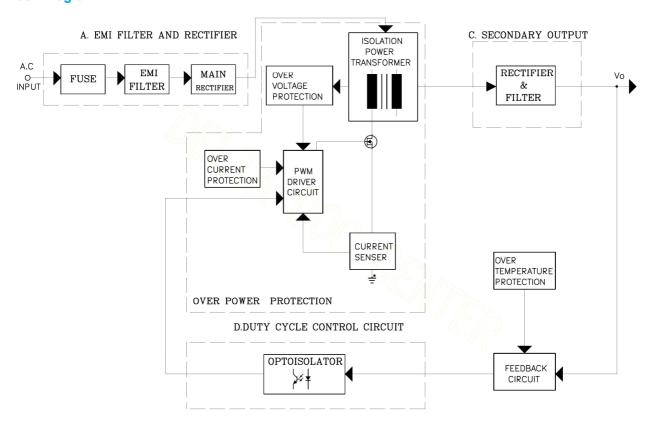





12V 40W / MDS-040APS12 BA

Dimensions:

W x L x H: 50.8x76.2x22.9 mm

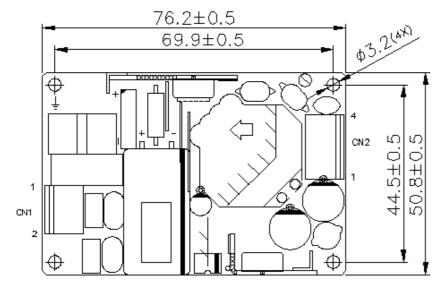

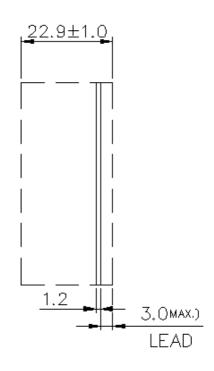

PIN ASSIGNMENT TABLE

| ITEM | PIN No. | FUNCTION | CONNECTOR |
|-------------|---------|----------|---|
| CN1 (AC) | 1 | L | JST B2P3-VH(LF)(SN) MATING WITH JST VHR-3N |
| (//0) | 2 | N | (middle terminal should be blank) |
| | 1 | | |
| ÇN2 | 2 | +٧ | JST B4P-VH(LF)(SN) MATING WITH JST VHR-4N |
| (DC) | 3 | GND | MATING WITH JST VHR-4N |
| | 4 | GIND | |

Notes

- Dimensions are in mm
- For Open Frame type: There are 4 normal mounting holes.



12V 40W / MDS-040APS12 BA

Power De-rating

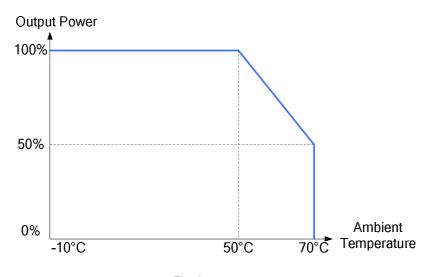


Fig. 3



12V 40W / MDS-040APS12 BA

Functions

Start-up Time

The time required for the output voltage to reach 90% of its set value, after the input voltage is applied.


Rise Time

The time required for the output voltage to change from 10% to 90% of its set value.

Hold-up Time

Hold up time is the time when the AC input collapses and output voltage retains regulation for a certain period of time. The time required for the output to reach 95% of its set value, after the input voltage is removed.

■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

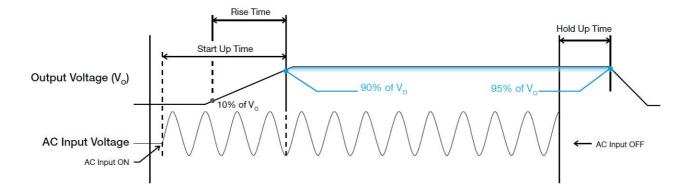




12V 40W / MDS-040APS12 BA

Dynamic Response


The power supply output voltage will remain within ±3% of its steady state value, when subjected to a dynamic load 50 to 100% of its rated current.

■ 50 to 100% Load



Inrush Current

Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.



Overvoltage Protection


The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 3 under "Protections". Power supply will latch off, and require removal/re-application of input AC voltage in order to restart.

Short Circuit Protection

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

Overload & Over current Protections

The power supply's Overload (OLP) and Over current (OCP) Protections will be activated when output current between 150% and 210% of $I_{\rm O}$ (Max load). In such occurrence, the $V_{\rm O}$ will start to drop and once the power supply has reached its maximum power limit, the protection is activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition of the OLP and OCP is removed and $I_{\rm O}$ is back within the specifications.



Additionally, if the $I_{\rm O}$ is <150% but >100% for a prolong period of time (depending on the load), the Over Temperature Protection (OTP) will be activated due to high temperature on critical components. The power supply will then go into latch mode until the fault is removed and the mains is reapplied.

Over Temperature Protection

As mentioned above, the power supply also has Over Temperature Protection (OTP). This is activated when the overload condition persists for an extended duration and the output current is below the overload trigger point but >100% load. In the event of a higher operating condition at 100% load, the power supply will run into OTP when the surrounding air temperature is higher than the operating temperature. When activated, the output voltage will go into latch mode until the main is reapplied and the surrounding air temperature drops to its normal operating temperature.



12V 40W / MDS-040APS12 BA

Certificate



All Delta Medical Power products conform to the European directive 2011/65/EU. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances.



Delta has been certified as meeting the requirement of ISO 13485: 2003 and EN ISO 13485:2012 for the design and manufacture of switching power supply and



In addition to a UL Total Certification Program (TCP) approved client laboratory for IEC62368-1. Delta also has participated UL Client Test Data Program (CDTP) for IEC 60601.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta:

MDS-040APS12 BA