

PQ05TZ51/PQ05TZ11 Series

Surface Mount Type Low Power-Loss Voltage Regulators

Features

- Low power-loss(Dropout voltage: MAX 0.5V)
- Surface mount type package(Equivalent to EIAJ SC-63)
- Output current:
 (0.5A : PQ2TZ55, PQ3TZ50/53, PQ05TZ51 series)
 (1.0A : PQ2TZ15, PQ05TZ11 series)
- Output voltage precision: $\pm 2.5\%$
- Built-in ON/OFF control function
- Low dissipation current at OFF-state(I_{qs} : MAX.5 μ A)
- Tape packaged type is also available.
 (ϕ 330mm reel: 3 000pcs.)

Applications


- Personal computers
- Personal information tools(PDA)
- Various OA equipment

Model Line-ups

	0.5A output	1.0A output
2.5V output	PQ2TZ55	PQ2TZ15
3.0V output	PQ3TZ50	
3.3V output	PQ3TZ53	
5V output	PQ05TZ51	PQ05TZ11
9V output	PQ09TZ51	PQ09TZ11
12V output	PQ12TZ51	PQ12TZ11

Outline Dimensions

(Unit : mm)

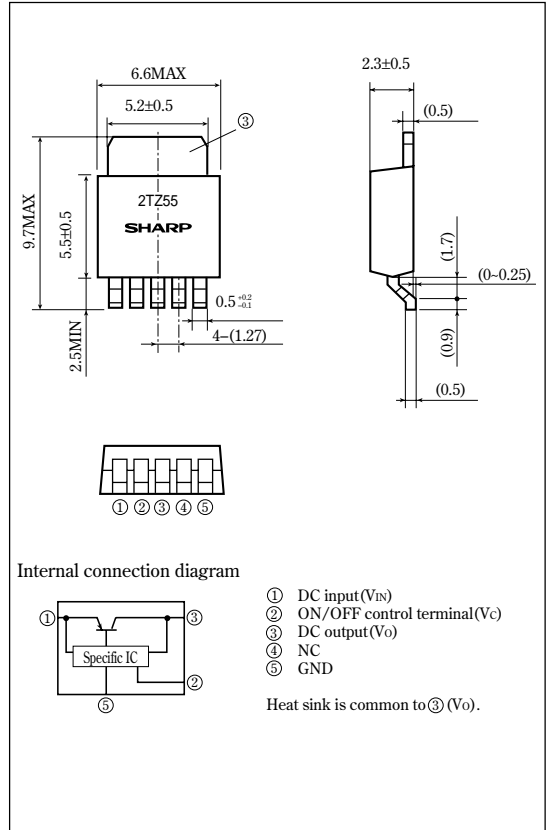

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating		Unit
		PQ2TZx5 PQ3TZ5x	PQxxTZ51 PQxxTZ11	
*1 Input voltage	V_{IN}	10	24	V
*1 ON/OFF control terminal voltage	V_C	10	24	V
Output current	I_o	0.5		A
		1		
*2 Power dissipation	P_D	8		W
*3 Junction temperature	T_j	150		$^\circ\text{C}$
Operating temperature	T_{opr}	-20 to +80		$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +150		$^\circ\text{C}$
Soldering temperature	T_{sol}	260(For 10s)		$^\circ\text{C}$

*1 All are open except GND and applicable terminals.
 *2 P_D :With infinite heat sink.
 *3 Overheat protection may operate at $125 \leq T_j < 150^\circ\text{C}$

• Please refer to the chapter " Handling Precautions ".

SHARP

Electrical Characteristics

(Unless otherwise specified, conditions shall be^{*4}, $V_C=2.7V$, $T_a=25^\circ C$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	PQ2TZ55/15	V_{IN}	—	3.0	—	10.0	V
	PQ3TZ50			3.4	—	10.0	
	PQ3TZ53			3.7	—	10.0	
Output voltage	PQ2TZ55/15	V_o	^{*5, *9}	2.438	2.5	2.562	V
	PQ3TZ50			2.925	3.0	3.075	
	PQ3TZ53			3.218	3.3	3.382	
	PQ05TZ51/11			4.88	5.0	5.12	
	PQ09TZ51/11			8.87	9.0	9.22	
PQ12TZ51/11	11.7	12.0	12.3				
Load regulation		RegL	^{*5, *6}	—	0.2	2.0	%
Line regulation		RegI	$I_o=5mA$, ^{*10}	—	0.1	2.5	%
Temperature coefficient of output voltage		TcVo	$T_j=0$ to $125^\circ C$, $I_o=5mA$, ^{*5}	—	± 0.01	—	%/ $^\circ C$
Ripple rejection		RR	Refer to Fig.2	45	60	—	dB
Dropout voltage	PQ05TZ51/11	V_{i-o}	^{*7, *9}	—	0.2	0.5	V
	PQ2TZ55/15			—	—	0.5	
	PQ3TZ50/53			—	—	0.5	
^{*4} ON-state voltage for control		$V_{C(on)}$	^{*5, *8, *9}	2.0	—	—	V
ON-state current for control		$I_{C(on)}$	^{*5, *9}	—	—	200	μA
OFF-state voltage for control		$V_{C(off)}$	^{*5}	—	—	0.8	V
OFF-state current for control	PQ05TZ51/11	$I_{C(off)}$	^{*5, V_C=0.4V}	—	—	2	μA
	PQ2TZ55/15			—	—	2	
	PQ3TZ50/53			—	—	2	
Quiescent current	PQ05TZ51/11	I_q	^{*5, I_o=0A}	—	4	10	mA
	PQ2TZ55/15			—	—	10	
	PQ3TZ50/53			—	—	10	
Output OFF-state consumption current		I_{qs}	^{*5, V_C=0.4V, I_o=0A}	—	—	5	μA

^{*4} PQ2TZ55 : $I_o=0.3A$, $V_{IN}=3.3V$, PQ2TZ15 : $I_o=0.5A$, $V_{IN}=3.3V$

^{*5} PQ2TZ51/11 : $V_{IN}=7V$, PQ09TZ51/11 : $V_{IN}=11V$, PQ12TZ51/11 : $V_{IN}=14V$, PQ3TZ50/53 : $V_{IN}=5V$

^{*6} PQxxTZ51, PQ3TZ50/53, PQ2TZ55 : $I_o=5mA$ to $0.5A$, PQxxTZ51, PQ2TZ15 : $I_o=5mA$ to $1.0A$

^{*7} Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

^{*8} In case of opening control terminal $\text{\textcircled{C}}$, output voltage turns off.

^{*9} PQxxTZ51, PQ3TZ50/53 : $I_o=0.3A$, PQxxTZ11, PQ2TZ55 : $I_o=0.5A$, PQ2TZ15 : $I_o=1.0A$

PQ3TZ50 : $V_{IN}=3.4V$, PQ3TZ53 : $V_{IN}=3.7V$, PQ2TZ55/15 : $V_{IN}=3V$

^{*10} PQ05TZ51/11 : $V_{IN}=6V$ to $16V$, PQ09TZ51/11 : $V_{IN}=10V$ to $20V$, PQ12TZ51/11 : $V_{IN}=13V$ to $23V$, PQ3TZ50/53 : $V_{IN}=4V$ to $10V$,

PQ2TZ55/15 : $V_{IN}=3V$ to $10V$

Fig. 1 Test Circuit


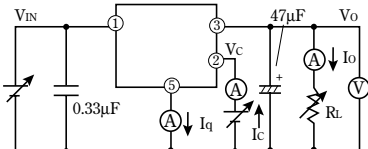


Fig. 2 Test Circuit for Ripple Rejection

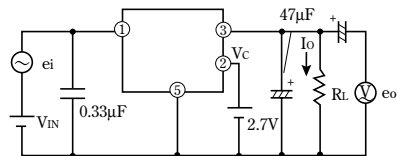

$f=120Hz$ (sine wave)

$e_i(rms)=0.5V$

$V_{IN}=3.3V$ (PQ2TZ55/15)

5V(PQ3TZ50/53)

7V(PQ05TZ51/11)

11V(PQ09TZ51/11)


14V(PQ12TZ51/11)

$I_o=0.5A$ (PQ2TZ15)

$I_o=0.3A$ (PQ2TZ55/PQ3TZ50/53/PQxxTZ51/11)

$RR=20 \log(e_i(rms)/e_o(rms))$

Fig. 3 Power Dissipation vs. Ambient Temperature

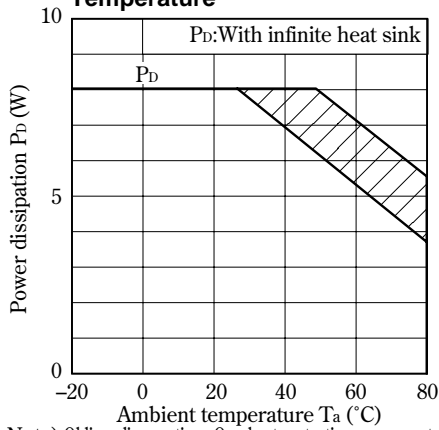

Note) Oblique line portion : Overheat protection may operate in this area.

Fig. 4 Overcurrent Protection Characteristics (PQ2TZ55)

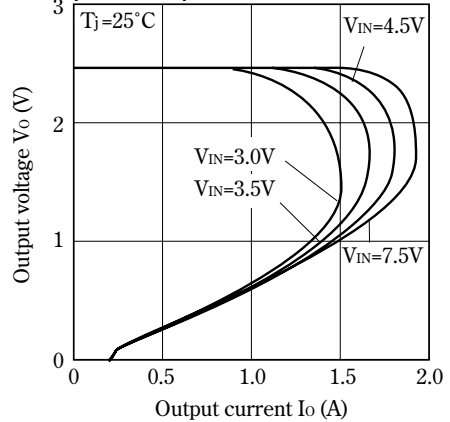


Fig. 5 Overcurrent Protection Characteristics(PQ2TZ15)

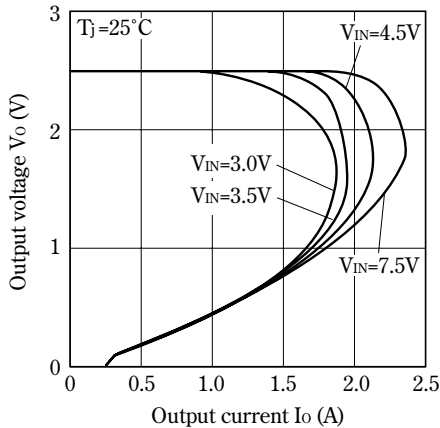


Fig. 6 Overcurrent Protection Characteristics (Typical Value)(PQ3TZ50/53)

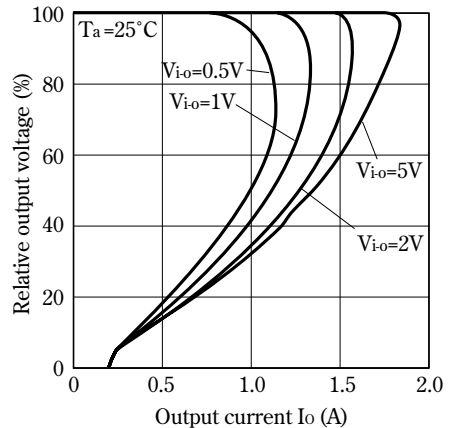


Fig. 7 Overcurrent Protection Characteristics (Typical Value)(PQxxTZ51/11)

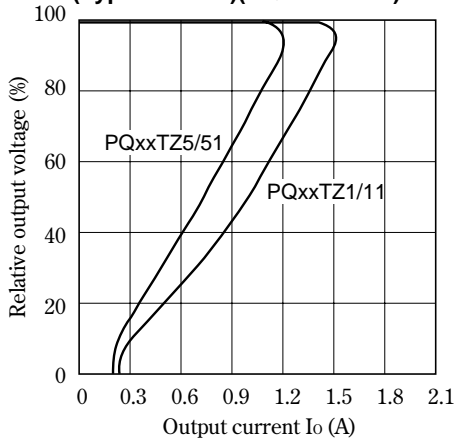


Fig. 8 Output Voltage Deviation vs. Junction Temperature(PQ2TZ55)

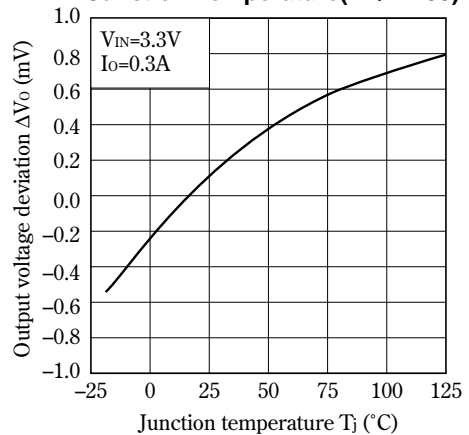


Fig. 9 Output Voltage Deviation vs. Junction Temperature (PQ2TZ15)

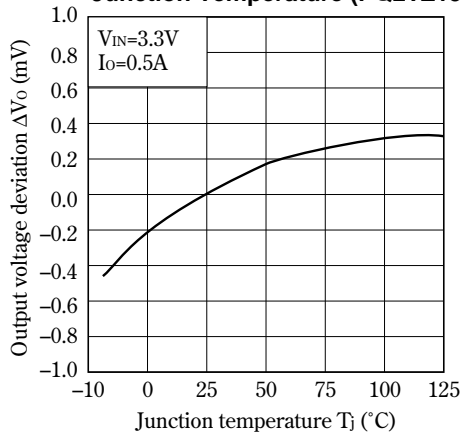


Fig.10 Output Voltage Deviation vs. Junction Temperature(PQ3TZ50/PQ3TZ53)

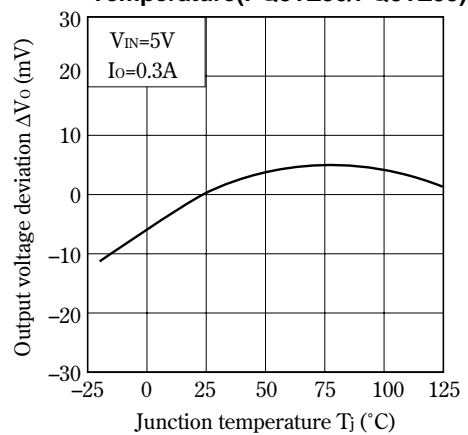


Fig.11 Output Voltage Deviation vs. Junction Temperature(PQ05TZ51/11)

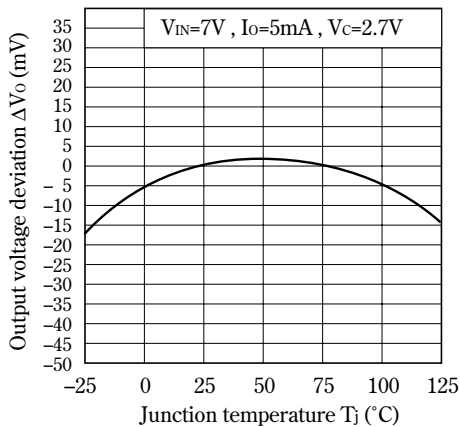


Fig.12 Output Voltage Deviation vs. Junction Temperature(PQ09TZ51/11)

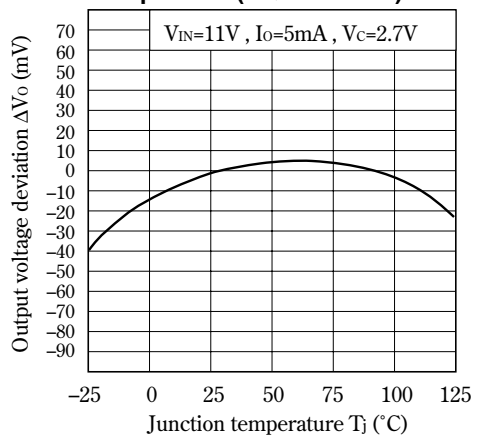


Fig.13 Output Voltage Deviation vs. Junction Temperature(PQ12TZ51/11)

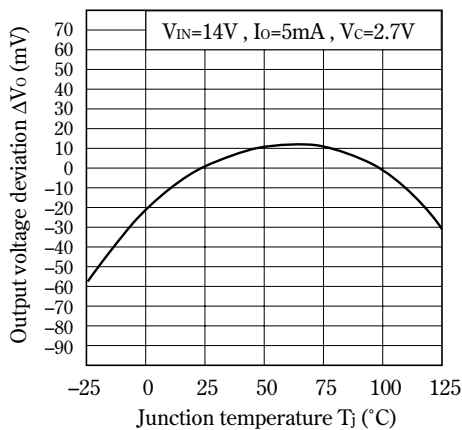


Fig.14 Output Voltage vs. Input Voltage (PQ2TZ55)

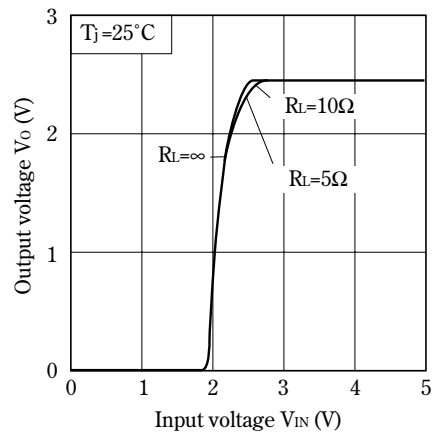


Fig.15 Output Voltage vs. Input Voltage (PQ2TZ15)

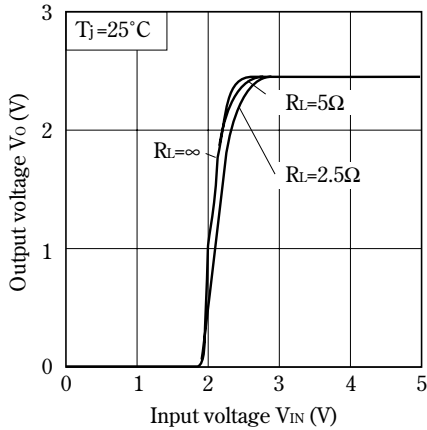


Fig.16 Output Voltage vs. Input Voltage (PQ3TZ50)

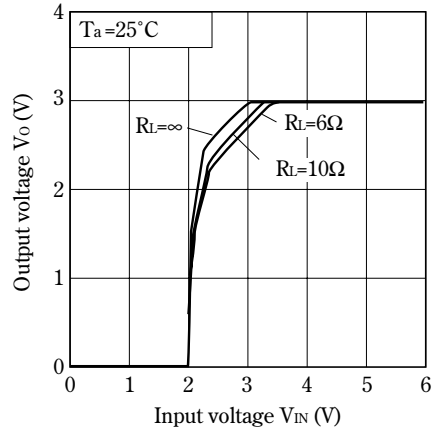


Fig.17 Output Voltage vs. Input Voltage (PQ3TZ53)

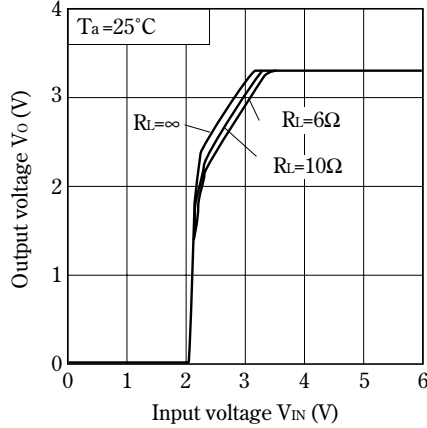


Fig.18 Output Voltage vs. Input Voltage (PQ05TZ51)

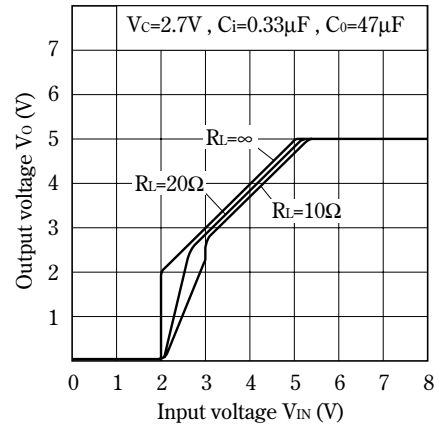


Fig.19 Output Voltage vs. Input Voltage (Typical Value) (PQ09TZ51)

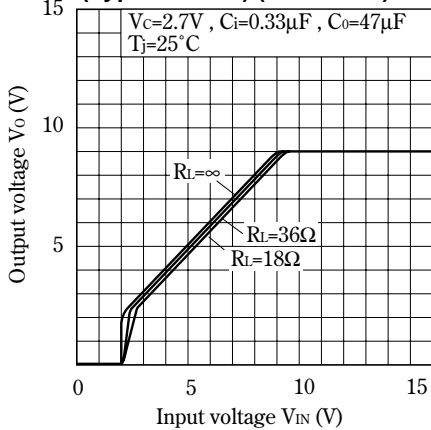


Fig.20 Output Voltage vs. Input Voltage (Typical Value) (PQ12TZ51)

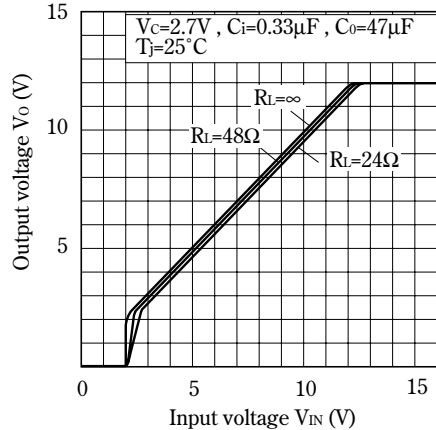


Fig.21 Output Voltage vs. Input Voltage (Typical Value) (PQ05TZ11)

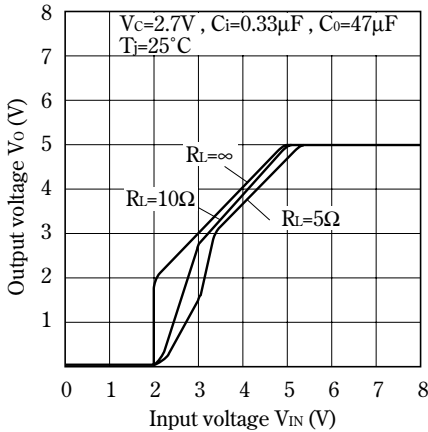


Fig.22 Output Voltage vs. Input Voltage (PQ09TZ11)

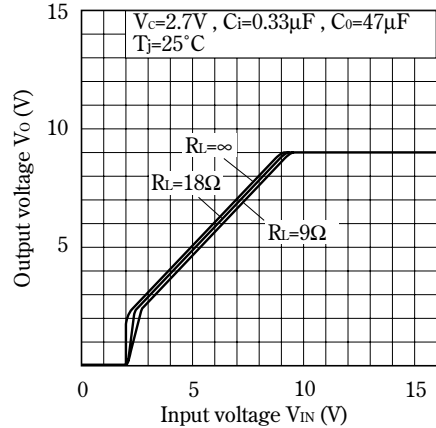


Fig.23 Output Voltage vs. Input Voltage (PQ12TZ11)

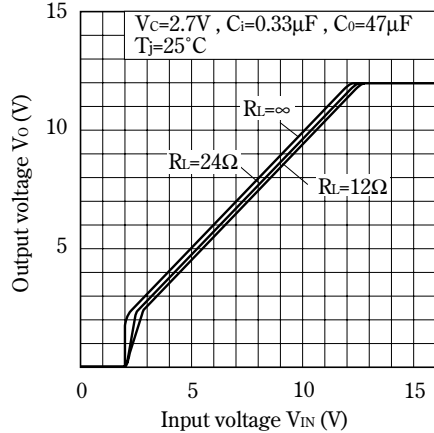


Fig.24 Circuit Operating Current vs. Input Voltage (PQ2TZ55)

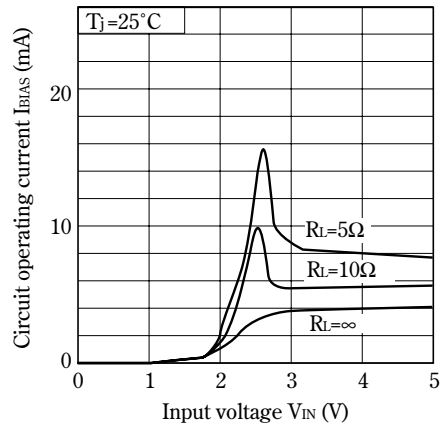


Fig.25 Circuit Operating Current vs. Input Voltage (PQ2TZ15)

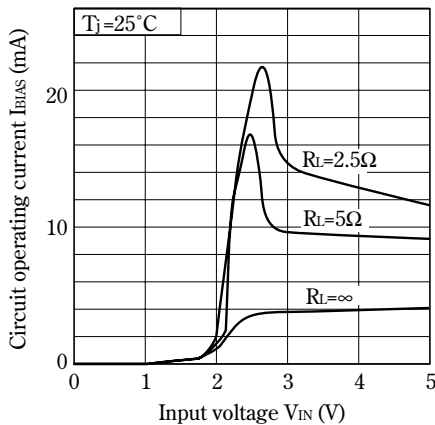


Fig.26 Circuit Operating Current vs. Input Voltage (PQ3TZ50)

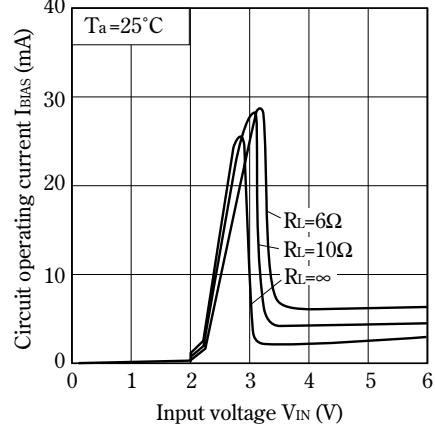


Fig.27 Circuit Operating Current vs. Input Voltage (PQ3TZ53)

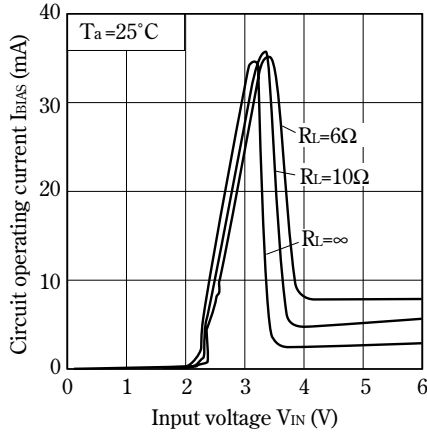


Fig.28 Circuit Operating Current vs. Input Voltage (PQ05TZ51)

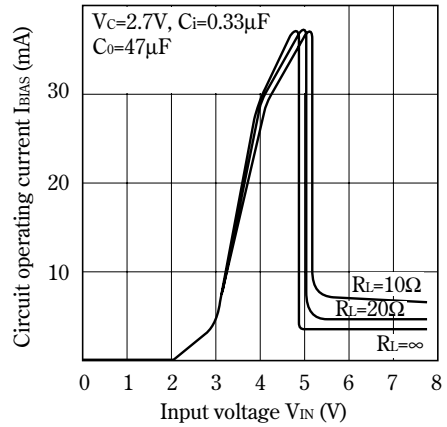


Fig.29 Circuit Operating Current vs. Input Voltage (PQ09TZ51)

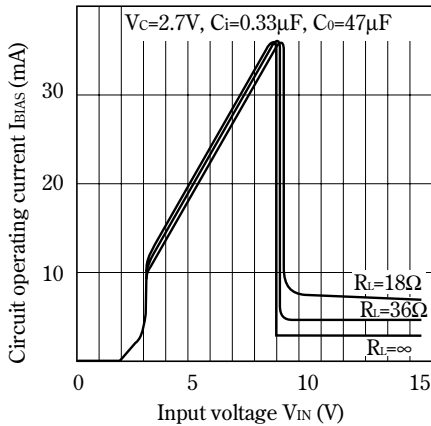


Fig.30 Circuit Operating Current vs. Input Voltage (PQ12TZ51)

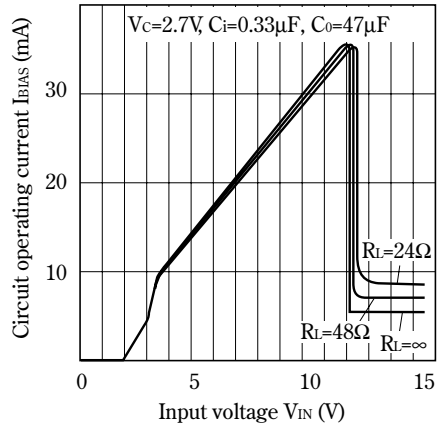


Fig.31 Circuit Operating Current vs. Input Voltage (PQ05TZ11)

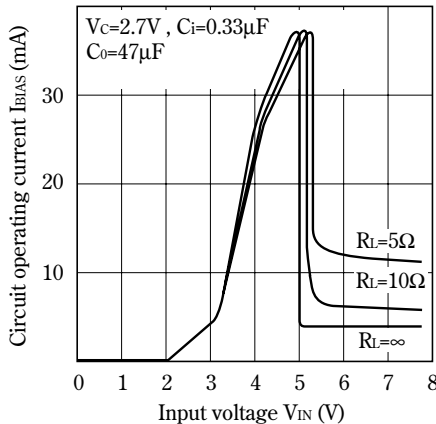


Fig.32 Circuit Operating Current vs. Input Voltage (PQ09TZ11)

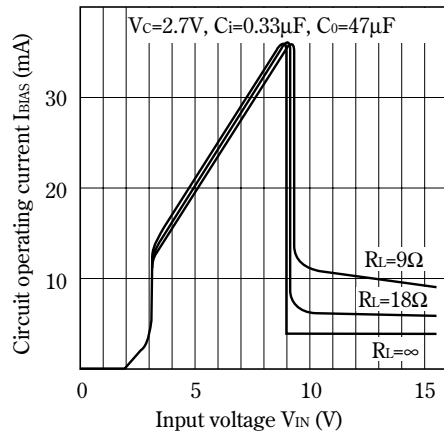


Fig.33 Circuit Operating Current vs. Input Voltage (PQ12TZ11)

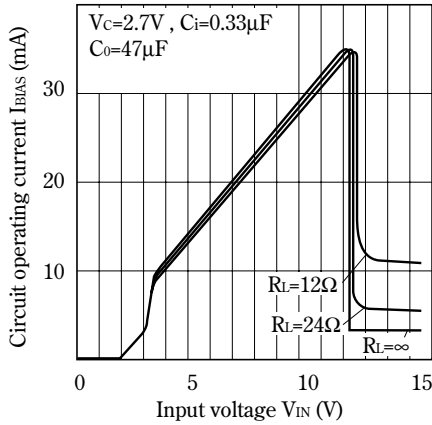


Fig.34 Dropout Voltage vs. Junction Temperature (PQ3TZ50/PQ3TZ53)

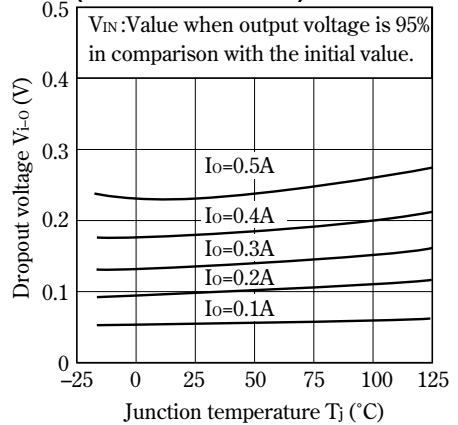


Fig.35 Dropout Voltage vs. Junction Temperature (PQ05TZ51/PQ09TZ51/PQ12TZ51)

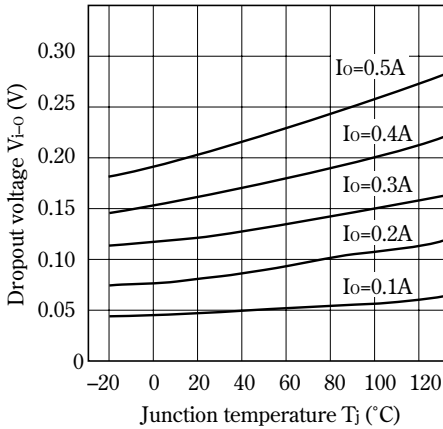


Fig.36 Dropout Voltage vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)

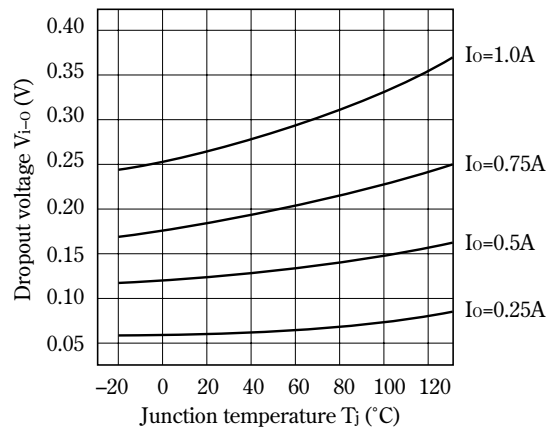


Fig.37 Quiescent Current vs. Junction Temperature (PQ2TZ55)

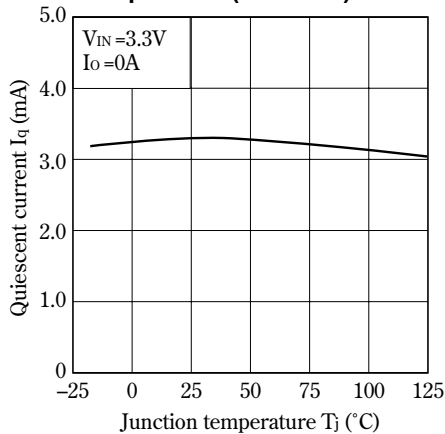


Fig.38 Quiescent Current vs. Junction Temperature (PQ2TZ15)

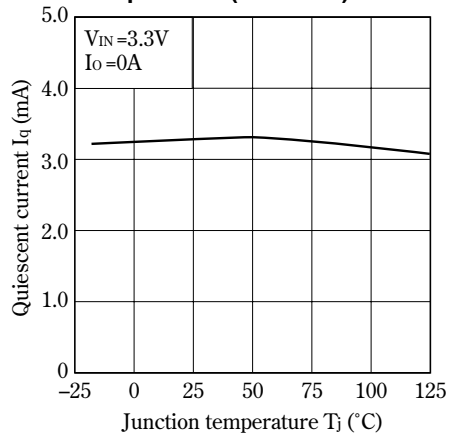


Fig.39 Quiescent Current vs. Junction Temperature (Typical Value) (PQ3TZ50/PQ3TZ53)

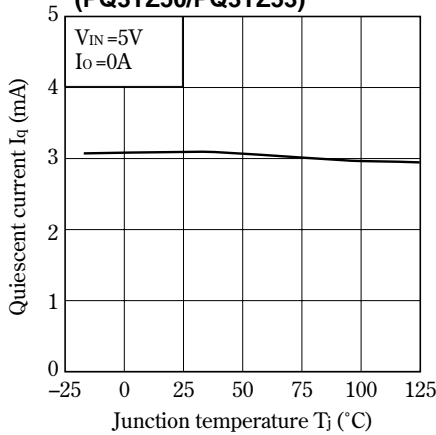


Fig.40 Quiescent Current vs. Junction Temperature (PQxxTZ51/11)

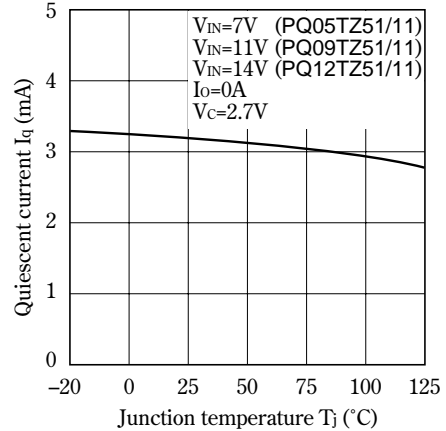


Fig.41 ON-state Voltage for Control vs. Junction Temperature(Typical Value) (PQ3TZ50/PQ3TZ53)

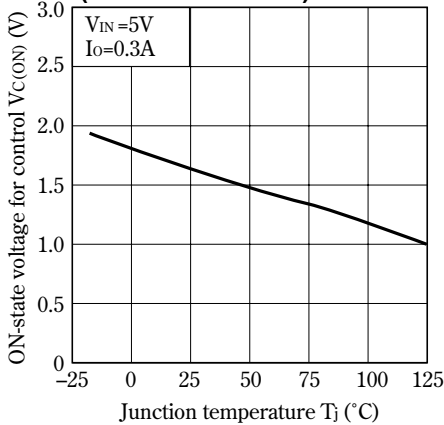


Fig.42 Ripple Rejection vs. Input Ripple Frequency (PQ3TZ50/PQ3TZ53)

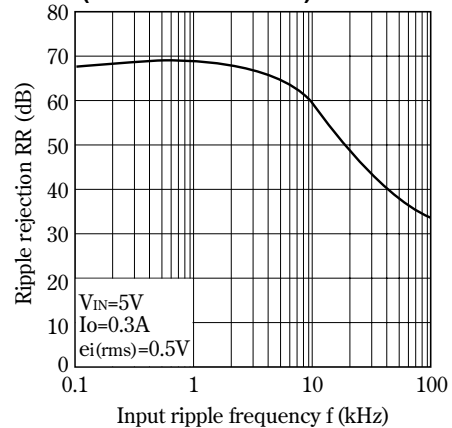


Fig.43 Ripple Rejection vs. Input Ripple Frequency (PQ05TZ51/PQ09TZ51/PQ12TZ51)

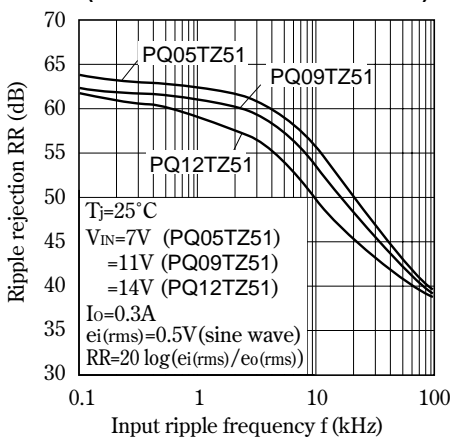


Fig.44 Ripple Rejection vs. Input Ripple Frequency (PQ05TZ11/PQ09TZ11/PQ12TZ11)

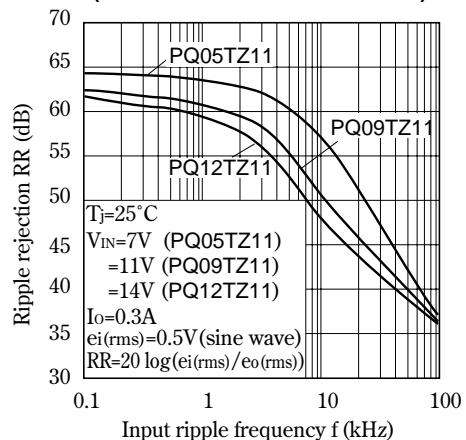


Fig.45 Ripple Rejection vs. Output Current (PQ05TZ51/PQ09TZ51/PQ12TZ51)

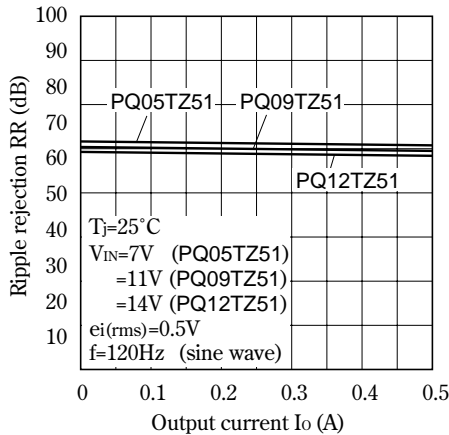


Fig.46 Ripple Rejection vs. Output Current (PQ05TZ11/PQ09TZ11/PQ12TZ11)

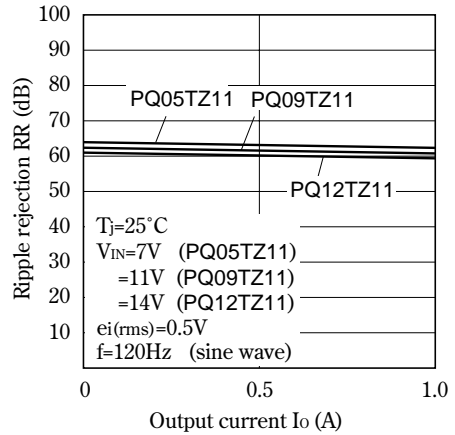


Fig.47 Output Peak Current vs. Junction Temperature(Typical Value) (PQ3TZ50/PQ3TZ53)

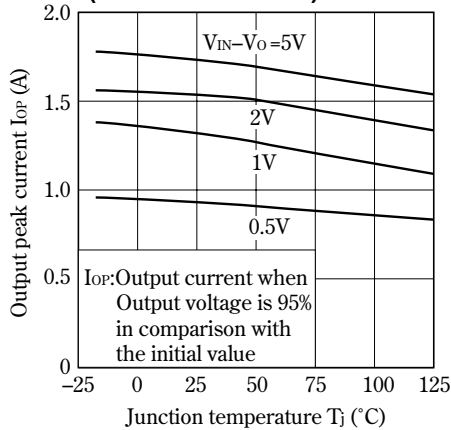


Fig.48 Output Peak Current vs. Dropout Voltage (PQ05TZ51/PQ09TZ51/PQ12TZ51)

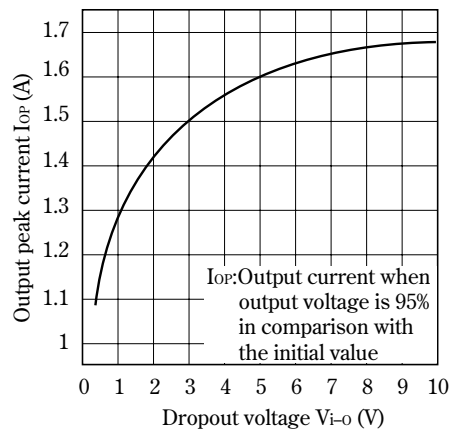


Fig.49 Output Peak Current vs. Dropout Voltage (PQ05TZ11/PQ09TZ11/PQ12TZ11)

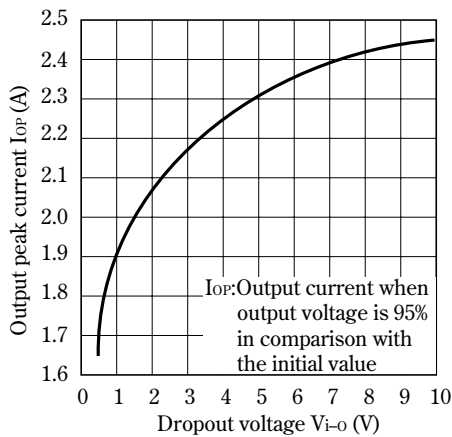


Fig.50 Output Peak Current vs. Junction Temperature (PQ05TZ51/PQ09TZ51/PQ12TZ51)

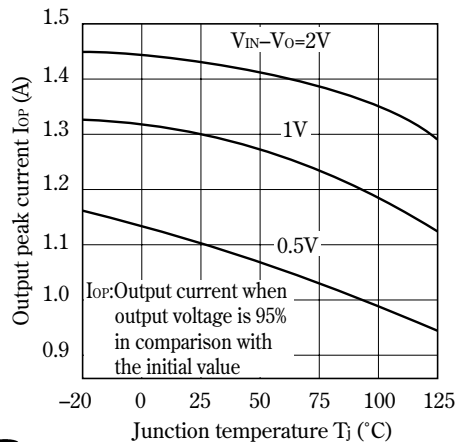


Fig.51 Output Peak Current vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)



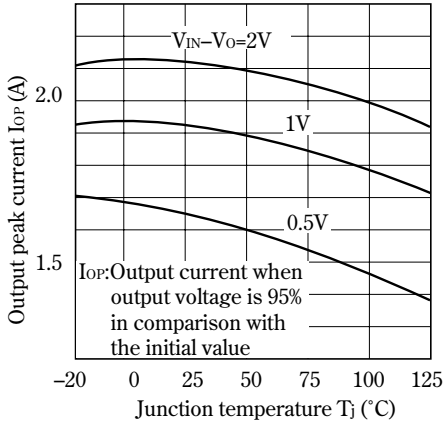



Fig.52 Power Dissipation vs. Ambient Temperature (Typical Value)

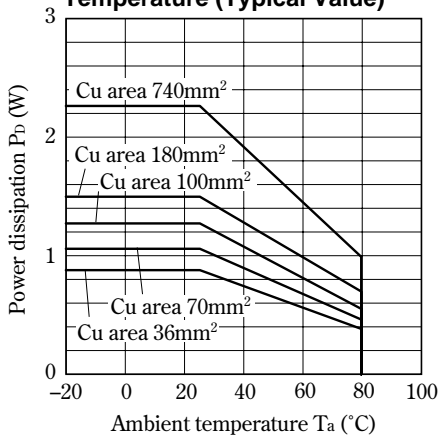

Material : Glass-cloth epoxy resin
 Size : 50x50x1.6mm
 Cu thickness : 35μm

ON/OFF Operation

As shown in the figure, ON/OFF control function is available.

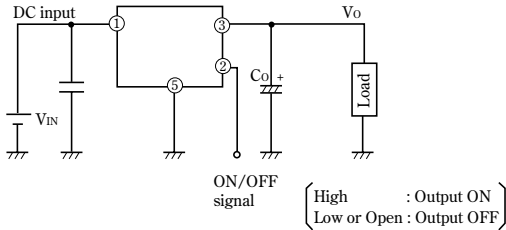

Model Line-ups for Tape-packaged Products

	Sleeve-packaged products	Tape-packaged products
Output current	High-precision output type	High-precision output type
0.5A output	PQ2TZ55/PQ3TZ50/PQ05TZ51 series	PQ2TZ55U/PQ3TZ50U/PQ05TZ5U series
1.0A output	PQ2TZ15/PQ3TZ53/PQ05TZ11 series	PQ2TZ15U/PQ3TZ53U/PQ05TZ1U series