


# MBR830 - MBR860


#### **8.0A SCHOTTKY BARRIER RECTIFIER**

#### **Features**

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- Plastic Material: UL Flammability Classification Rating 94V-0



Pin 2 **0**-



### **Mechanical Data**

Case: Molded Plastic

• Terminals: Plated Leads Solderable per

MIL-STD-202, Method 208

Polarity: See Diagram

Weight: 2.24 grams (approx.)

Mounting Position: Any

Marking: Type Number


## Maximum Ratings and Electrical Characteristics @ TA = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	MBR 830	MBR 835	MBR 840	MBR 845	MBR 850	MBR 860	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	30	35	40	45	50	60	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	21	24.5	28	31.5	35	42	٧
Average Rectified Output Current (Note 1) @ T <sub>C</sub> = 125	5°C Io	8.0						А
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	d I <sub>FSM</sub>	150					А	
Repetitive Peak Reverse Surge Current @ $t \le 2$ .	0μs I <sub>RRM</sub>	1.0					Α	
Forward Voltage Drop	5°C V <sub>FM</sub>	0.57 0.70   0.70 0.80   0.84 0.95					80	٧
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		0.1 15					mA	
Typical Junction Capacitance (Note 2)	Cj	250						pF
Typical Thermal Resistance Junction to Case (Note 1)	R <sub>0</sub> JC	3.0						K/W
Voltage Rate of Change (Rated V <sub>R</sub> )	dV/dt	1000						V/µs
Operating and Storage Temperature Range	$T_{j,}T_{STG}$	-65 to +150					·	°C

Notes: 1. Thermal resistance junction to case mounted on heatsink.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

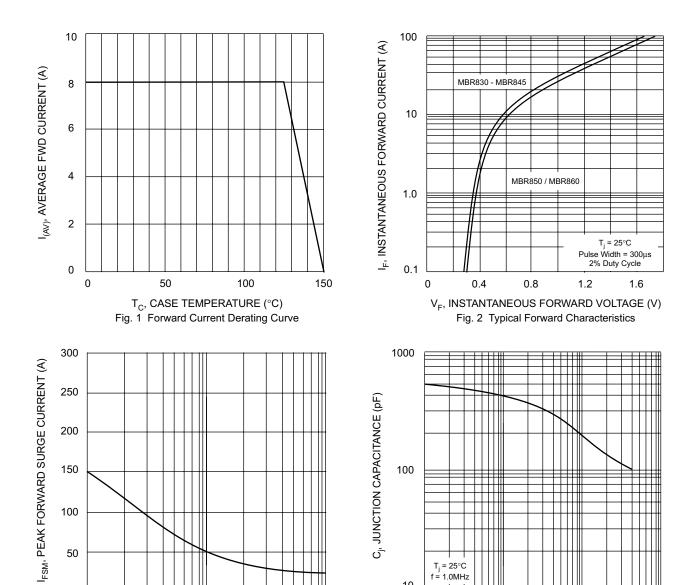

100

10

0.1

0

1

10 V<sub>R</sub>, REVERSE VOLTAGE (V) Fig. 4 Typical Junction Capacitance

100