

Digital Transistors (Built-in Resistors)


DTC143XM/DTC143XE/DTC143XUA DTC143XKA /DTC143XCA/DTC143XSA

DIGITAL TRANSISTOR (NPN)

FEATURES


- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

• Equivalent Circuit

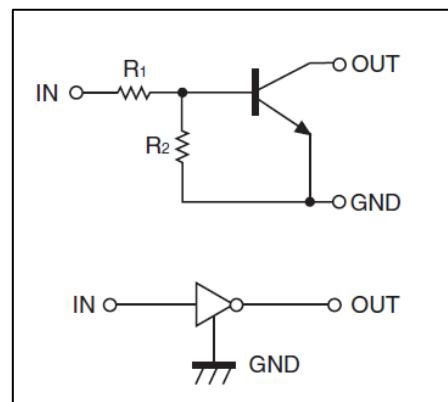

PIN CONNECTIONS and MARKING

DTC143XM




MARKING: 43

SOT-723

1. IN
2. GND
3. OUT


DTC143XE



SOT-523

1. IN
2. GND
3. OUT

DTC143XUA




MARKING: 43

SOT-323

1. IN
2. GND
3. OUT


DTC143XKA



SOT-23-3L

1. IN
2. GND
3. OUT

DTC143XCA



MARKING: 43

SOT-23

1. IN
2. GND
3. OUT

DTC143XSA



TO-92S


1. GND
2. OUT
3. IN

MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTC143X□)						Unit
		M	E	UA	CA	KA	SA	
V _{CC}	Supply Voltage	50						V
V _{IN}	Input Voltage	-7~+20						V
I _O	Output Current	100						mA
P _D	Power Dissipation	100	150	200	200	200	300	mW
T _j	Junction Temperature	150						°C
T _{stg}	Storage Temperature	-55~+150						°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} =5V,I _O =100μA	0.3			V
	V _{I(on)}	V _O =0.3V,I _O =20mA			2.5	V
Output voltage	V _{O(on)}	I _O /I _I =10mA/0.5mA		0.1	0.3	V
Input current	I _I	V _I =5V			1.8	mA
Output current	I _{O(off)}	V _{CC} =50V,V _I =0			0.5	μA
DC current gain	G _I	V _O =5V,I _O =10mA	30			
Input resistance	R ₁		3.29	4.7	6.11	kΩ
Resistance ratio	R ₂ /R ₁		1.7	2.1	2.6	
Transition frequency	f _T	V _O =10V,I _O =5mA,f=100MHz		250		MHz

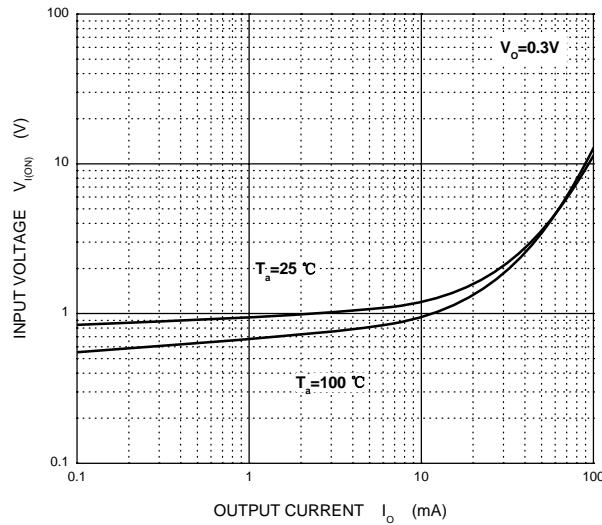ON Characteristics**OFF Characteristics**