


# LSI LOGIC

5304804 0011512 T00 LLC

## **L64111** **MPEG Audio Decoder** **Technical Manual**

**September 1993**

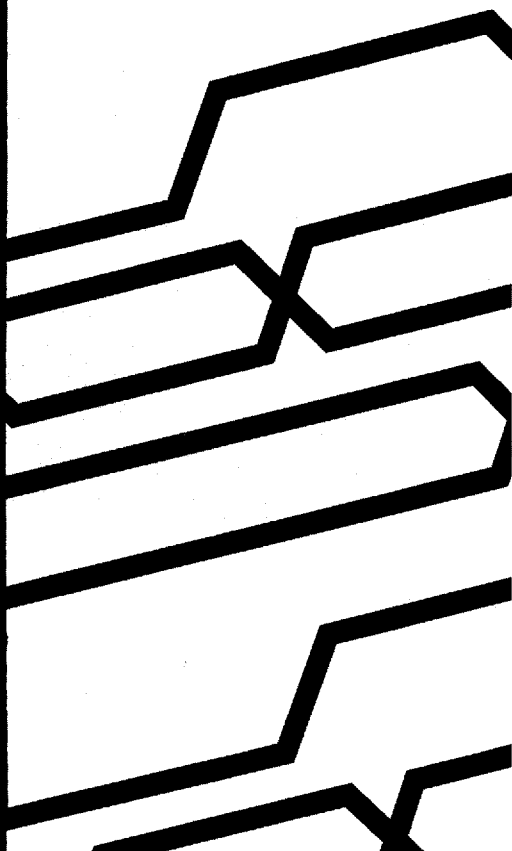

---

This document is preliminary. As such, it contains data derived from functional simulations and performance estimates. LSI Logic has not verified either the functional descriptions, or the electrical and mechanical specifications using production parts.

First Edition

MD72-000101-99 A

This document applies to revision B of the L64111 MPEG Audio Decoder and to all subsequent versions unless otherwise indicated in a subsequent edition or an update to this edition of the document.

Publications are stocked at the address given below. Requests should be addressed to:

**LSI Logic Corporation**  
**Literature Distribution, M/S D-102**  
**1551 McCarthy Boulevard**  
**Milpitas, CA 95035**  
**Fax: 408.433.8989**

LSI Logic Corporation reserves the right to make changes to any products herein at any time without notice. LSI Logic does not assume any responsibility or liability arising out of the application or use of any product described herein, except as expressly agreed to in writing by LSI Logic; nor does the purchase or use of a product from LSI Logic convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual property rights of LSI Logic or third parties.

© 1993 LSI Logic Corporation. All rights reserved.

#### TRADEMARK ACKNOWLEDGMENT

LSI Logic logo design is a registered trademark of LSI Logic Corporation. All other brand and product names may be trademarks of their respective companies.

# Preface

---

This book is the primary reference and technical manual for the L64111 MPEG Audio Decoder. It contains a complete functional description for the L64111 and includes complete physical and electrical specifications for the L64111.

---

**Audience**

This book assumes that you have some familiarity with microprocessors and related support devices. The people who benefit from this book are:

- Engineers and managers who are evaluating the L64111 for possible use in a system
  - Engineers who are designing the L64111 into a system
- 

**Organization**

This book has the following chapters:

- Chapter 1, **Introduction**, describes the general characteristics and capabilities of the L64111 and provides an introduction to relevant MPEG concepts.
  - Chapter 2, **Audio Decoder Functional Overview**, describes L64111 interfaces and discusses the chip's internal architecture and functions.
  - Chapter 3, **Audio Decoder Signal Descriptions**, details the operation of each L64111 interface signal.
  - Chapter 4, **Registers**, describes the L64111 registers and their usage.
  - Chapter 5, **Specifications**, lists the electrical and mechanical characteristics of the product.
  - Chapter 6, **Applications**, presents the designs of several applications.
- 

**Related Publications**

*ISO/IEC JTC 1/SC 29 Coded Representation of Picture, Audio and Multimedia/Hypermedia Information: MPEG CD 11172 Part 1 - Systems, Part 2 - Video, and Part 3 - Audio.*

## Conventions Used in this Manual

The following signal naming conventions are used throughout this manual:

- A level-significant signal that is true or valid when the signal is LOW always has an overbar ( $\overline{\phantom{x}}$ ) over its name.
- An edge-significant signal that initiates actions on a HIGH-to-LOW transition always has an overbar ( $\overline{\phantom{x}}$ ) over its name.

Hexadecimal numbers are indicated by the prefix “0x” before the number—for example, 0x32CF. Binary numbers are indicated by the subscripted “<sub>2</sub>” following the number—for example, 1101<sub>2</sub>.

The first time a word or phrase is defined in this manual, it is *italicized*.

# Contents

---

|                  |                               |     |
|------------------|-------------------------------|-----|
| <b>Chapter 1</b> | <b>Introduction</b>           | 1-1 |
|                  | 1.1 L64111 Features           | 1-2 |
|                  | 1.2 MPEG Overview             | 1-3 |
|                  | 1.3 MPEG Audio Encoding       | 1-4 |
|                  | 1.4 Transmission of MPEG Data | 1-5 |
|                  | L64111 MPEG Data Input        | 1-5 |
|                  | ISO System Streams            | 1-6 |
|                  | MPEG Packets                  | 1-6 |

---

|                  |                                          |     |
|------------------|------------------------------------------|-----|
| <b>Chapter 2</b> | <b>Audio Decoder Functional Overview</b> | 2-1 |
|                  | 2.1 L64111 Features                      | 2-2 |
|                  | Data Input                               | 2-2 |
|                  | Control and Processing                   | 2-2 |
|                  | Output                                   | 2-3 |
|                  | Error Handling                           | 2-3 |
|                  | Synchronization                          | 2-3 |
|                  | 2.2 L64111 Internal Organization         | 2-3 |
|                  | Controller Interface and Input Data FIFO | 2-5 |
|                  | Pre-parser                               | 2-5 |
|                  | Decoder                                  | 2-6 |
|                  | DRAM Controller                          | 2-6 |
|                  | Play Director                            | 2-6 |
|                  | PCM Serial Converter                     | 2-6 |
|                  | Output Multiplexer                       | 2-6 |
|                  | 2.3 Decoding Details                     | 2-6 |
|                  | 2.4 Rate Control and Clock Granularity   | 2-8 |

---

|                  |                                          |     |
|------------------|------------------------------------------|-----|
| <b>Chapter 3</b> | <b>Audio Decoder Signal Descriptions</b> | 3-1 |
|                  | 3.1 Digital Audio Data Serial Inputs     | 3-2 |

|     |                        |     |
|-----|------------------------|-----|
| 3.2 | DRAM Interface         | 3-3 |
| 3.3 | Controller Interface   | 3-4 |
| 3.4 | FIFO Status Indicators | 3-5 |
| 3.5 | Other Control Signals  | 3-6 |
| 3.6 | PCM Audio Outputs      | 3-8 |

---

|                  |                                         |      |
|------------------|-----------------------------------------|------|
| <b>Chapter 4</b> | <b>Registers</b>                        | 4-1  |
| 4.1              | Register Operation and Summary          | 4-2  |
| 4.2              | Data Register                           | 4-3  |
| 4.3              | Control Registers                       | 4-4  |
|                  | Control Register 1                      | 4-4  |
|                  | Control Register 2                      | 4-6  |
|                  | Control Register 3                      | 4-8  |
| 4.4              | Interrupt Registers                     | 4-9  |
|                  | Interrupt Mask and Status Register 1    | 4-9  |
|                  | Interrupt Mask and Status Register 2    | 4-10 |
| 4.5              | Timer Countdown and Offset Registers    | 4-12 |
|                  | Timer Countdown Register (TCR)          | 4-12 |
|                  | Timer Offset Register High (TORH)       | 4-13 |
|                  | Timer Offset Register Low (TORL)        | 4-13 |
| 4.6              | Parametric Data Word Registers          | 4-13 |
|                  | Parametric Data Word Register 1         | 4-14 |
|                  | Parametric Data Word Register 2         | 4-15 |
|                  | Parametric Data Word Register 3         | 4-16 |
| 4.7              | Presentation Time Stamp (PTS) Registers | 4-17 |
| 4.8              | Ancillary/User Data FIFO                | 4-17 |
| 4.9              | Channel Buffer Registers                | 4-18 |
|                  | Channel Buffer Status Counter           | 4-18 |
|                  | Channel Buffer Write Counter            | 4-18 |
|                  | Channel Buffer Read Counter             | 4-19 |

---

|                  |                            |      |
|------------------|----------------------------|------|
| <b>Chapter 5</b> | <b>Specifications</b>      | 5-1  |
| 5.1              | Electrical Characteristics | 5-2  |
| 5.2              | AC Timing                  | 5-5  |
| 5.3              | Pinouts                    | 5-9  |
| 5.4              | Mechanical Specifications  | 5-10 |
| 5.5              | Ordering Information       | 5-12 |

|                   |                                                |      |
|-------------------|------------------------------------------------|------|
| <b>Chapter 6</b>  | <b>Applications</b>                            | 6-1  |
|                   | 6.1 External Controller Operation              | 6-1  |
|                   | 6.2 Stand-alone Operation                      | 6-4  |
|                   | 6.3 DAC Interfacing                            | 6-5  |
|                   | Calculating the Output Sample Rate             | 6-7  |
|                   | Setting the PCM Output Mode                    | 6-9  |
|                   | 6.4 Audio/Video Application                    | 6-10 |
|                   | Synchronization Using Timecodes                | 6-10 |
|                   | Input Buffering Considerations                 | 6-11 |
|                   | Cue and Review                                 | 6-12 |
| <b>Appendix A</b> | <b>Customer Feedback</b>                       | A-1  |
| <b>Figures</b>    |                                                |      |
|                   | 1.1 L64111 Interface Signals                   | 1-2  |
|                   | 1.2 Audio Encoding Process (Simplified)        | 1-5  |
|                   | 1.3 ISO System Stream                          | 1-6  |
|                   | 1.4 MPEG Audio Packet Structure                | 1-7  |
|                   | 2.1 L64111 Internal Architecture               | 2-4  |
|                   | 2.2 Input Data FIFO                            | 2-5  |
|                   | 2.3 Decoder Audio Stream Processing Flow Chart | 2-7  |
|                   | 3.1 L64111 Logic Symbol                        | 3-2  |
|                   | 3.2 Input Data FIFO and Flags                  | 3-6  |
|                   | 3.3 Use of STARTI and STARTO Signals           | 3-8  |
|                   | 5.1 Channel Buffer Write Cycle                 | 5-6  |
|                   | 5.2 Channel Buffer Read Cycle                  | 5-7  |
|                   | 5.3 Controller Interface Write Cycle           | 5-7  |
|                   | 5.4 Controller Interface Read Cycle            | 5-8  |
|                   | 5.5 Input Timing                               | 5-8  |
|                   | 5.6 Serial PCM Data Out Timing                 | 5-8  |
|                   | 5.7 100-pin PQFP Mechanical Dimensions         | 5-11 |
|                   | 6.1 Application Using External Controller      | 6-2  |
|                   | 6.2 Stand-alone Operation                      | 6-4  |
|                   | 6.3 PCM Output Modes                           | 6-9  |
|                   | 6.4 Audio/Video Application Elements           | 6-10 |

---

|               |     |                                                           |      |
|---------------|-----|-----------------------------------------------------------|------|
| <b>Tables</b> | 1.1 | Audio Frame Header Structure                              | 1-7  |
|               | 4.1 | L64111 Registers                                          | 4-3  |
|               | 5.1 | Absolute Maximum Ratings                                  | 5-2  |
|               | 5.2 | Recommended Operating Conditions                          | 5-2  |
|               | 5.3 | Capacitance                                               | 5-2  |
|               | 5.4 | DC Characteristics                                        | 5-3  |
|               | 5.5 | Pin Description Summary                                   | 5-4  |
|               | 5.6 | AC Characteristics                                        | 5-5  |
|               | 5.7 | 100-pin PQFP Pinout by Pin Number                         | 5-9  |
|               | 5.8 | 100-pin PQFP Pinout by Pin Name                           | 5-10 |
|               | 6.1 | Hardwiring Values Using Input Pins                        | 6-5  |
|               | 6.2 | Recommended Operating Frequencies Using Oversampling DACs | 6-6  |

# Chapter 1

## Introduction

---

Chapter 1 introduces the LSI Logic L64111 MPEG Audio Decoder and presents an introduction to MPEG technology. The L64111 is a single chip handling all aspects of the MPEG audio decoding process.

This chapter contains four sections:

- Section 1.1, L64111 Features
- Section 1.2, MPEG Overview
- Section 1.3, MPEG Audio Encoding
- Section 1.4, Transmission of MPEG Data


## 1.1 L64111 Features

The L64111 MPEG Audio Decoder is a single LSI component combining an ISO 11172 MPEG system stream decoder and an MPEG audio decoder.

Figure 1.1 is a block diagram of the L64111. The L64111 can accept either serial or parallel digital MPEG audio data. The L64111 contains an internal DRAM controller, which interfaces with external DRAM to provide memory for a Channel Buffer.

The L64111 can be used in stand-alone and controller-based applications, such as digital cable decoders, CD players, digital VCRs, digital direct-broadcast satellite decoders, laser disk players, CD ROM players, and workstations.

Figure 1.1  
L64111 Interface  
Signals

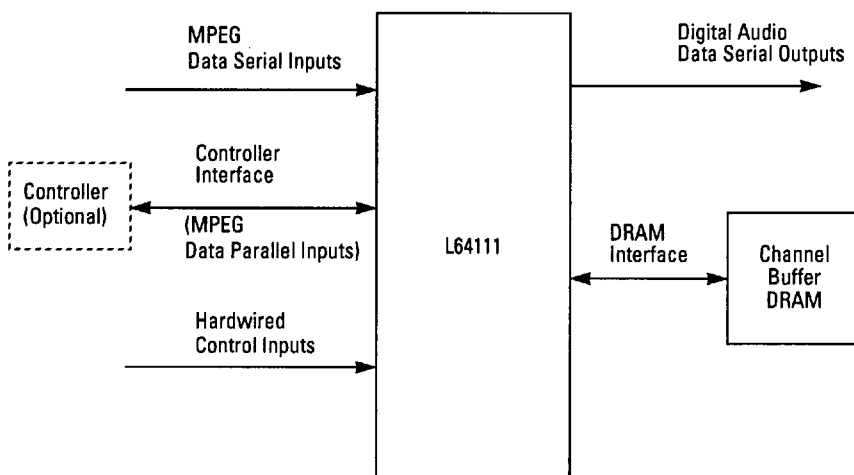

The key features of the L64111 are:

- complies with ISO CD 11172-1 and CD 11172-3 specifications for decoding of MPEG 90/265 Layers I and II audio bitstreams
- receives and handles MPEG ISO System Stream pack
- handles MPEG audio stream (audio frame) packet
- handles up to 15 Mbit/s (sustained rate) bitstream parsing
- decodes/reconstructs MPEG-1 audio stream Layers I and II in real-time
- supports data rates up to 192 Kbit/s monaural and 384 Kbit/s stereo/dual channel

- MUSICAM compatible at selected bitrates
- operates with or without an external system microcontroller
- handles 8- or 16-bit data through the external controller interface
- simple interface to external Channel Buffer using a single 256K x 4 100 ns fast page mode DRAM
- supports more than one second of delay for audio/video synchronization
- includes registers for cue and review control and output data rate control

## 1.2 MPEG Overview

The ISO/IEC Motion Pictures Expert Group (MPEG) first proposed the JTC1/SC2/WG11 standard for coding of moving pictures and associated audio for use with digital storage media in 1990. Though a full discussion of MPEG is beyond the scope of this document, this section summarizes concepts common to both MPEG audio and video applications.

MPEG is a standard for the representation of compressed audio and video signals. It allows for:

- Data interchange between compatible systems
- Standardized decoding methodologies

Given an *elementary stream* of data (for audio data, this is called an *audio stream*), an MPEG encoder first digitally compresses and codes the data. The MPEG algorithm offers a choice of levels of complexity and performance for this process. (See Section 1.3, "MPEG Audio Encoding," for more information.)

To prepare a stream of compressed audio data for transmission, it is formatted into *audio frames*. Each audio frame contains audio data, error-correction data, and optional user-defined *ancillary data*. The audio frames are then sent in *packets* grouped within *packs* in an ISO MPEG *System Stream*. (See Section 1.4, "Transmission of MPEG Data," for more information.)

The packs in system streams may contain a mix of audio packets and video packets for one or more channels. Packs may contain packets from separate elementary streams. Thus, MPEG can easily support multiple

*channels* of program material, and a decoder given access to a system stream may access large numbers of channels.

On the receiving end, MPEG audio decoding involves:

- identifying and removing a channel's audio frames from the audio packets in the System Stream
- managing the temporary storage of frames
- applying appropriate algorithms for decoding the audio frames
- merging decoded audio frames back into continuous audio
- limiting the effect of transmission errors

The LSI Logic L64111 MPEG Audio Decoder is a single-chip solution that performs all MPEG-1 Audio Layer I and II decoding operations in real time. The L64111 produces decoded audio data in industry-standard Pulse Code Modulation (PCM) serial format, allowing the use of commodity parts (PCM DACs) for audio output.

The following two sections discuss the two major parts of MPEG audio processing in more detail.

---

### 1.3 MPEG Audio Encoding

MPEG audio encoding is intended to efficiently represent a digitized audio stream by removing redundant information. Because different applications have different performance goals, MPEG uses different encoding techniques. These techniques, called *Layers*, provide different trade-offs between compression and signal quality. The MPEG algorithm uses the two following processes for removing redundant audio information:


- Coding and quantization
- Psychoacoustic modelling

Coding and quantization are techniques that are applied to data that has been mapped into the frequency domain and filtered into subbands.

Psychoacoustic modeling is a technique that determines the best allocation of data within the available data channel bandwidth based on human perception.

The general structure of an MPEG encoder is shown in Figure 1.2.

*Figure 1.2*  
*Audio Encoding*  
*Process (Simplified)*

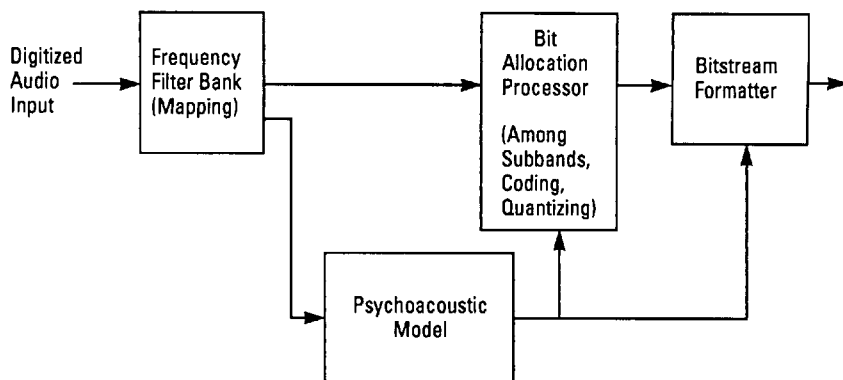

## 1.4 Transmission of MPEG Data

This section discusses formatting and transmission of MPEG-encoded data.

Once audio data has been coded, it may be stored or transmitted digitally. MPEG provides a framework for use of packet-oriented transmission of compressed data. In particular, ISO CD 11172 defines formats for digital data streams for both video and audio. The ISO System Stream format is designed to accommodate both audio packets and video packets within the same framework for transmission.

An ISO System Stream contains data in a specified sequential format. The data may be physically delivered in parallel form or serial form. The following discusses how the L64111 decoder accepts and handles data streams at the physical and the logical level.

### L64111 MPEG Data Input

The L64111 provides the following formats for MPEG data:

- Parallel input through a microcontroller interface
- Serial input through a dedicated serial link


**Parallel Data Input.** In order to be compatible with computer and storage media applications, the L64111 accepts parallel data through its Controller Interface. For more details on the Controller Interface, refer to the discussions in Chapters 2 and 3.

**Serial Data Input.** In order to be compatible with data transmission applications, the L64111 has a dedicated serial link interface to handle coded data, which is typically provided in bit-serial fashion.

## ISO System Streams

This subsection discusses MPEG system syntax. The highest level MPEG syntax is the ISO System Stream. The System Stream is composed of a sequence of packs, as shown in Figure 1.3.

Figure 1.3  
ISO System Stream

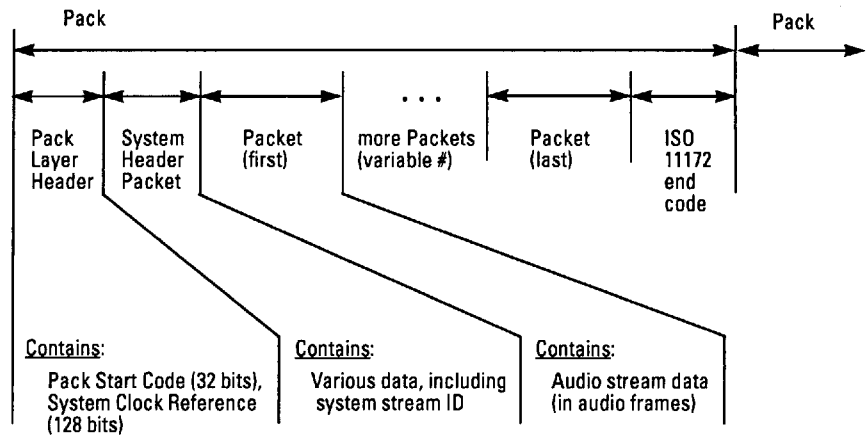


An MPEG pack is composed of a *pack layer header*, a *system header packet*, a sequence of *packets*, and ends with an *ISO 11172 end code*. The pack layer header contains a pack start code used for synchronization purposes, and a system clock value. The system header packet contains a variety of housekeeping data and in particular contains a system stream ID used to differentiate multiple system streams. A sequence of one or more packets contains either encoded audio or encoded video stream data. The ISO 11172 end code is the final element in an MPEG pack.

For detailed definition of pack headers, refer to the ISO CD 11172-1 system stream descriptions. The following section describes MPEG packets in more detail.

## MPEG Packets

Any one MPEG packet carries either audio or video data, but not both simultaneously. An MPEG Audio Packet contains an audio packet header and one or more Audio Frames. Figure 1.4 shows the packet structure.

Figure 1.4  
MPEG Audio Packet  
Structure

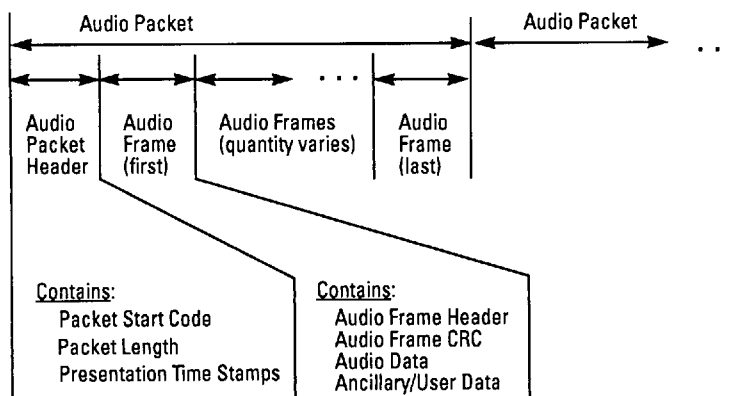

**Audio Packet Header.** An audio packet header contains the following:

■ **Packet Start Code**

Identifies this as an audio packet. The Packet Start Code also contains a five-bit audio stream identifier that may be read by the user to identify the audio channel.

■ **Packet Length**

Indicates the number of bytes remaining in the audio packet

■ **Presentation Time Stamps (PTS)**

These time stamps (PTS) are optional. The L64111 makes the PTS data available to the user through registers.

**Audio Frame.** An Audio Frame contains a slice of the audio data stream together with some supplementary data. Audio frames have the following elements:

■ **Audio Frame Header**

Table 1.1 shows the audio frame header structure:

Table 1.1  
Audio Frame Header  
Structure

| <i>Data Field</i> | <i>Size</i> | <i>Purpose</i>                                                                                  |
|-------------------|-------------|-------------------------------------------------------------------------------------------------|
| Sync Word         | 12 bits     | Has a fixed value of 0xFFF. The decoder uses the sync word to synchronize with the data stream. |
| ID                | 1 bit       | The decoder uses the ID to identify whether the data is MPEG coded or not.                      |
| Layer Type        | 2 bits      | Defines whether data is encoded as Layer I, II, or III.                                         |
| Protection Bit    | 1 bit       | A CRC is included in the data stream.                                                           |
| Bitrate Index     | 4 bits      | Defines an index into a table defining the bit rate.                                            |

(Sheet 1 of 2)

**Table 1.1 (Continued)**  
**Audio Frame Header**  
**Structure**

| <b>Data Field</b>     | <b>Size</b> | <b>Purpose</b>                                                                          |
|-----------------------|-------------|-----------------------------------------------------------------------------------------|
| Sampling Frequency ID | 2 bits      | Identifies the sampling frequency.                                                      |
| Padding Bit           | 1 bit       | Adds additional bytes to an audio frame to match the sample rate to the bit rate.       |
| Private Bit           | 1 bit       | User definable spare bit.                                                               |
| Channel Mode          | 2 bits      | Identifies whether the channel data is stereo, joint stereo, dual channel, or monaural. |
| Mode Extension        | 2 bits      | Used only in joint stereo mode. Indicates joint stereo subbands.                        |
| Copyright             | 1 bit       | Flags whether the data stream contains copyrighted material.                            |
| Original/Home         | 1 bit       | Indicates whether this data stream is an original or a copy.                            |
| Emphasis              | 2 bits      | Indicates the type of de-emphasis to be used.                                           |

*(Sheet 2 of 2)*

■ **Audio Frame Cyclic Redundancy Code (CRC)**

This field contains a 16-bit checksum, which can be used to detect errors in the audio frame header.

■ **Audio Data**

The L64111 uses the audio data to reconstruct the sampled audio data. Its format is beyond the scope of this document. The data structures for Layer I dual channel/stereo, intensity stereo, and for the more complex Layer II audio data fields are described in Sections 2.4.1.5 and 2.4.1.6 of the ISO CD 11172-3.

■ **Ancillary Data**

The final field in an audio frame contains user-defined data (ancillary data).

# **Chapter 2**

## **Audio Decoder**

### **Functional Overview**

---

Chapter 2 describes the features, major internal architecture, and general internal operation of the L64111 MPEG Audio Decoder. Additional application-specific material is given in Chapter 6, "Applications."

- Section 2.1, L64111 Features
- Section 2.2, L64111 Internal Organization
- Section 2.3, Decoding Details
- Section 2.4, Rate Control and Clock Granularity

---

**2.1 L64111 Features**      The L64111 can be used in environments ranging from stand-alone to controller-based, as well as in a workstation or embedded application. Applications for the L64111 include digital cable decoders, CD players, digital VCRs, digital direct-broadcast satellite decoders, laser disk players, CD ROM players, and multimedia workstations.

---

**Data Input**      The L64111 decoder can accept MPEG coded data in serial or parallel form. In Bypass mode, the L64111 routes input data unprocessed to the output. The L64111 can accept parallel data in either 8-bit or 16-bit form from a system controller.

---

**Control and Processing**      The L64111 parses ISO Systems Streams and also accepts Audio Streams. The decoder can parse system bitstreams at rates up to 15 Mb/s (depending on system clock speed), store and catalog audio frames in its external channel buffer, and provide presentation time stamp information for audio-video synchronization.

### **Control**

The L64111 may be used either as a stand-alone processor or with a system controller (microcontroller or microprocessor). The controller interface supports 8- or 16-bit data transfers. The L64111 obtains decoding information directly from the data stream. A controller may supply optional parameters for decoder synchronization, error correction, and frequency selection. When operating stand-alone, the L64111 uses default parameters.

### **Channel Buffer Capability**

The L64111 requires an external channel buffer for temporary storage of audio frames that have been removed from the stream. The L64111's internal DRAM controller requires just one external component: a 256K x 4 fast page mode DRAM. The channel buffer can handle at least one second of data, which facilitates audio-video synchronization or other delay compensation.

## Audio-Video Synchronization

Synchronization of audio and video streams requires that an external system controller monitor the video and audio presentation time stamps. The decoder delays audio frames (stores them in the buffer) until the controller determines that the correct presentation time has been reached. At this point the controller commands the L64111 to start decoding from data in the channel buffer. Using the 256K x 4 Channel Buffer, the decoder can compensate for at least one second of delay between audio and video data.


## Processing

The L64111 completely integrates and automates the process of decoding Layer I or Layer II streams.

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output                                          | The L64111 provides a 16-bit PCM output by means of a multiplexed serial output bus compatible with commodity PCM serial D to A converters (DACs). A bypass command allows four-wire PCM serial audio data to be passed directly from serial input to serial output with only a multiplexer delay.                                                                                                                                                                                           |
| Error Handling                                  | The L64111 provides the ability to conceal errors in data. When this function is enabled, two choices of response to error are provided: (1) repeat of last error-free audio frame, or (2) muting.                                                                                                                                                                                                                                                                                           |
| Synchronization                                 | A multipass synchronization mechanism minimizes frame synchronization errors. With this technique, successive valid syncs must be acquired before synchronization is established.                                                                                                                                                                                                                                                                                                            |
| <b>2.2<br/>L64111 Internal<br/>Organization</b> | When initialized, the L64111 synchronizes itself by monitoring the data stream and locating an audio frame in the data stream. When MPEG data is input, the chip strips away all unneeded information, retaining only the audio and control data. The audio and control data is then partially expanded and stored in a channel buffer. When the appropriate control signals are seen, this stored data is played; that is, decompression is performed and the data is output in PCM format. |

Figure 2.1 shows the L64111's internal architecture. The functions of the main elements are discussed after the figure.


Figure 2.1  
L64111 Internal  
Architecture

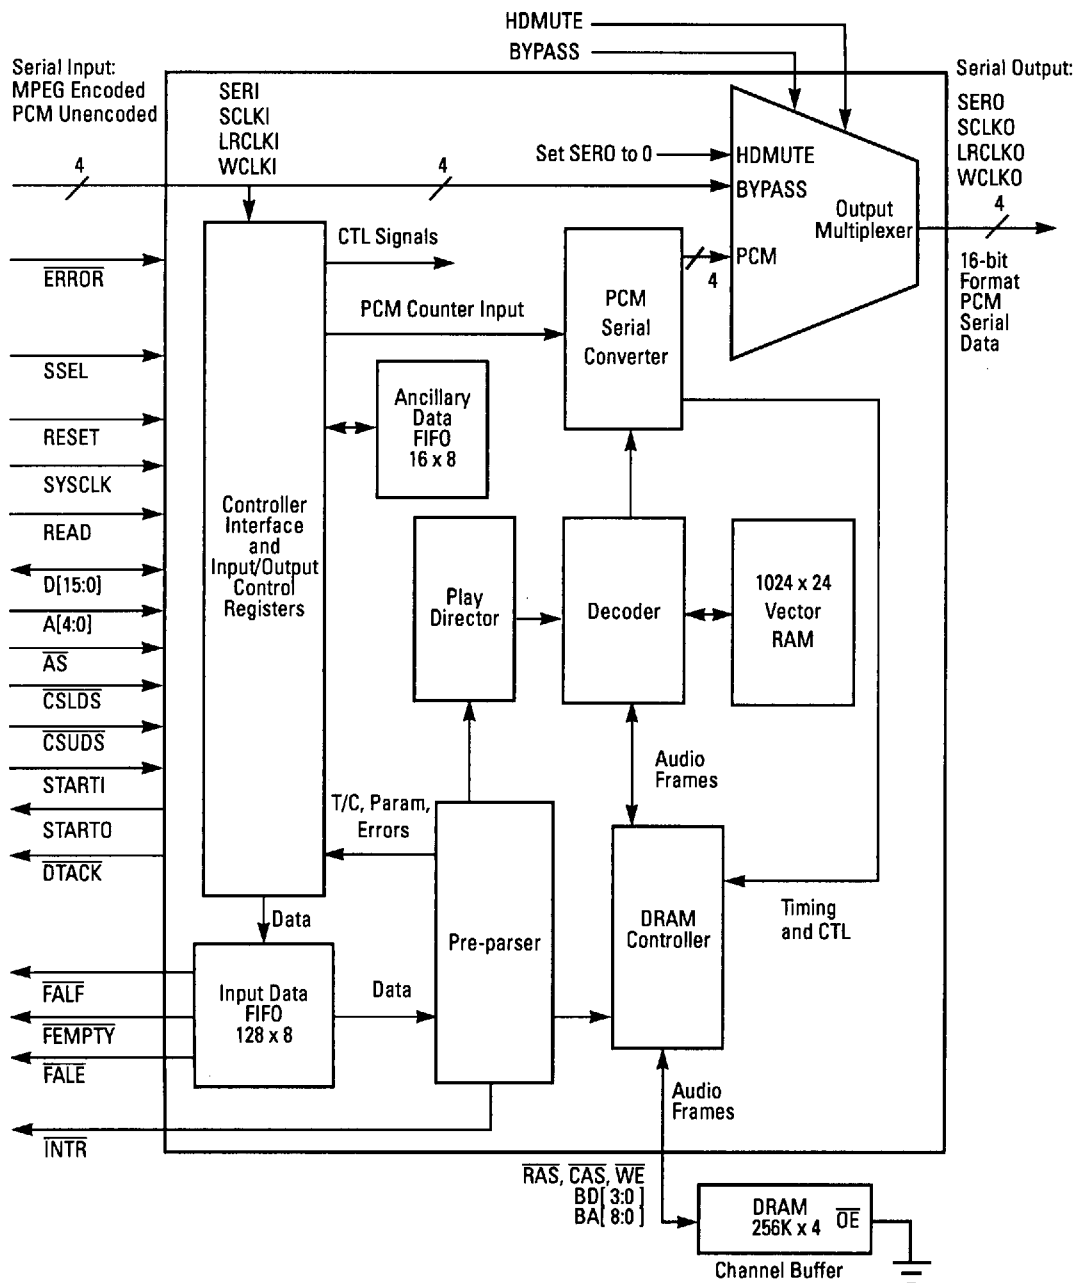

## Controller Interface and Input Data FIFO

Data enters the L64111 in parallel through the Controller Interface, or in serial through the serial port. The data is first synchronized to the system clock (SYCLK), then sent to the Input Data FIFO. The FIFO buffers the data and supplies it to the Pre-parser. Various flags signal the extent to which the buffer is full or empty. The flags are made available for flow control. The input FIFO is not part of the channel buffer, and its flags do not reflect the state of the channel buffer.

Figure 2.2  
Input Data FIFO

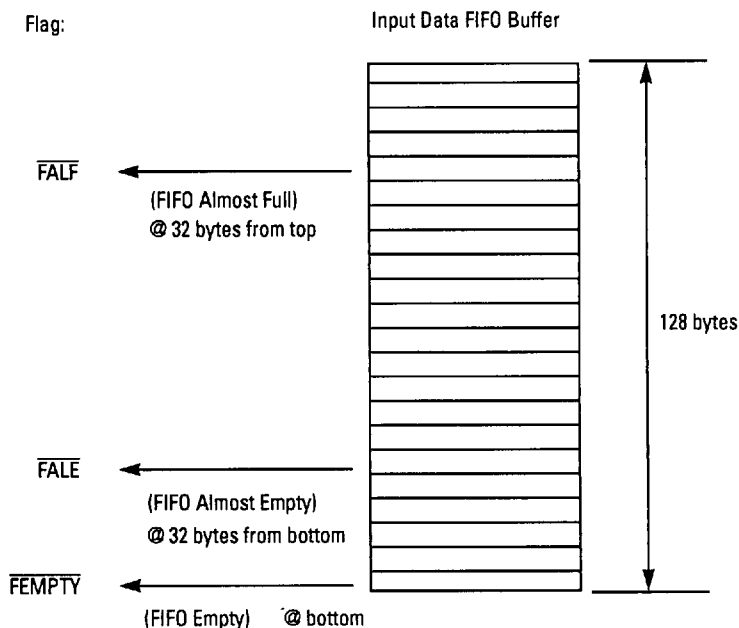

## Pre-parser

The Pre-parser performs stream parsing. For ISO System Stream parsing and synchronization, the Pre-parser detects the pack start code or system header start code and uses one of these to synchronize to the ISO stream.


The Pre-parser then looks for packet header information and attempts packet identification. It identifies audio frame information and discards all else. Next, it calculates the CRC and separates the header information from the audio data and sends the audio data to the channel buffer.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decoder                         | The decoder receives data from the Channel Buffer and fully decodes the data using the MPEG algorithm. The reconstructed data is then sent into the PCM Serial Converter.                                                                                                                                                                                                                                                                                                   |
| DRAM Controller                 | The DRAM Controller handles the read/write and refresh activities of the external Channel Buffer DRAM. The Channel Buffer stores blocks of partially decoded audio data prior to their reconstruction in the decoder.                                                                                                                                                                                                                                                       |
| Play Director                   | The Play Director maintains a list of the frames in the Channel Buffer. It also holds certain header information required to complete the decoding operation of each frame. The frames are normally accessed as a circular buffer. It is possible to skip or replay frames (cue and review) while they are in the Play Director. The Play Director is also used in error concealment.                                                                                       |
| PCM Serial Converter            | The 16-bit reconstructed stereo pair is output in a PCM format compatible with most serial D to A converters. Various modes are supported.                                                                                                                                                                                                                                                                                                                                  |
| Output Multiplexer              | <p>The Output Multiplexer controls routing of serial data signals. It can be program-controlled or hardwired to select one of the following three outputs:</p> <ul style="list-style-type: none"> <li>■ SERO set to zero</li> <li>■ Unprocessed input data (passed through unchanged)</li> <li>■ PCM format output of decoder</li> </ul> <p>In Bypass Mode, the L64111 passes all four PCM inputs unaltered to the output. All signals retain their temporal alignment.</p> |
| <b>2.3<br/>Decoding Details</b> | The decoder can operate with bit rates up to 384 Kbits/second stereo or dual channel with sampling frequencies of 32 KHz, 44.1 KHz, or 48 KHz. Once the decoder has started decoding, it takes data from the Channel Buffer. The decoder uses a two-pass system, as described in the following paragraphs.                                                                                                                                                                  |

In the first pass, the decoder parses the bitstream, separating out the sync, header information, allocations, and scalefactors, performs the CRC check, and removes ancillary data.

In the second pass, the decoder provides degrouping, inverse quantization, scaling, and subband synthesis. By performing two passes, the decoder can mask errors by repeating the same frame, and the two-pass approach allows identifying false audio syncs.

*Figure 2.3*  
*Decoder Audio*  
*Stream Processing*  
*Flow Chart*

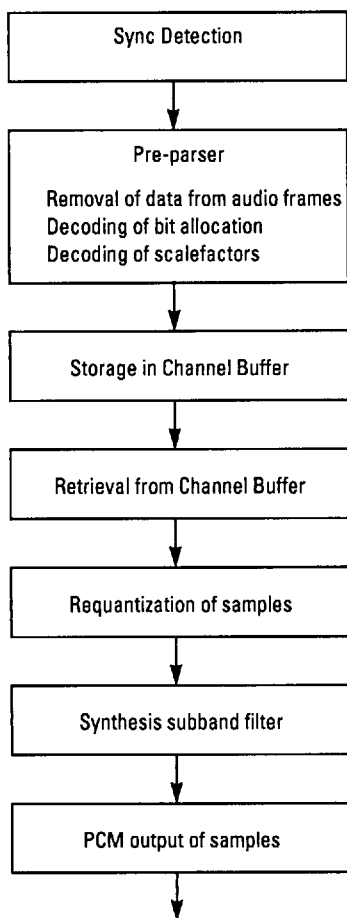

---

## **2.4**

### **Rate Control and Clock Granularity**

Rate control is the ability of the decoder to deliver a continuous PCM output correctly timed while the input is coming in bursts. The rate control mechanism has two parts.

The first part is the Input Data FIFO. Part of this FIFO compensates for the variations in processing time for different parts of the Pre-parser. The rest of this FIFO allows data burst rates up to 7.5 Mbytes/second (60 Mbits/second) for a length of 128 bytes, until the Pre-parser processes this data at its 15 Mbit/second rate. These rates are valid for SYSCLK of 30 MHz.

The second channel rate control is the Channel Buffer. This buffer is filled at a 15 Mbit/second rate and is emptied at the PCM output sample rate.

There is a mechanism which allows the output sample rate to be accurately derived from the device clock. It is also possible to periodically correct the output sample rate for timebase drift between the encoder and the decoder in systems where they do not share a common clock.

# **Chapter 3**

## **Audio Decoder**

### **Signal Descriptions**

---


Chapter 3 describes all L64111 interface signals. These descriptions are useful for hardware designers who are interfacing the L64111 with other devices.

This chapter contains the following sections:

- Section 3.1, Digital Audio Data Serial Inputs
- Section 3.2, DRAM Interface
- Section 3.3, Controller Interface
- Section 3.4, FIFO Status Indicators
- Section 3.5, Other Control Signals
- Section 3.6, PCM Audio Outputs

Figure 3.1 is the logic symbol for the L64111.

Figure 3.1  
L64111 Logic Symbol

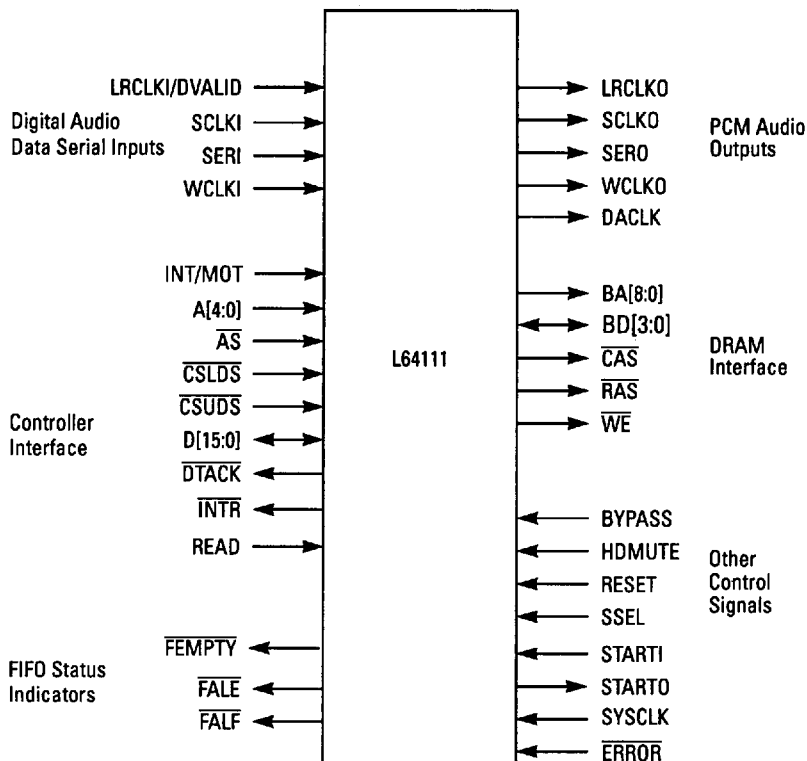

### 3.1 Digital Audio Data Serial Inputs

The Digital Audio serial inputs can accept MPEG or PCM serial data. The L64111 uses the serial data input when either the SSEL pin and/or the SER/ PAR register bit is HIGH, or if the device is in Bypass mode. Otherwise, data on these inputs is ignored.

#### LRCLKI/DVALID

##### Data Valid

When Bypass mode is inactive, this signal acts as DVALID. When DVALID is asserted by an external device, data on SERI is valid and is clocked into the L64111 on the next rising edge of SCLKI, which allows easy demultiplexing of multiple independent streams of serial data, or masking data (parity bits, for example) which is not part of the MPEG stream.

When the L64111 is in Bypass mode, this signal acts as LRCLKI. LRCLKI does not affect the data on SERI. During bypass, LRCLKI

##### Input

is connected to LRCLKO through a multiplexer. A HIGH indicates that the SERI input contains left channel data; a LOW indicates that SERI contains right channel data. The data rate on this input is usually SCLKI/16.

|              |                                                                                                                                                                                                                                                                                                       |              |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>SCLKI</b> | <b>Serial Clock In</b>                                                                                                                                                                                                                                                                                | <b>Input</b> |
|              | The L64111 samples SERI, DVALID, and $\overline{\text{ERROR}}$ on the rising edge of SCLKI. SCLKI can be asynchronous to SYSCLK up to a maximum frequency determined by device characterization, but it can never be more than twice the frequency of SYSCLK. The clock does not need to be periodic. |              |
|              | In Bypass mode, SCLKI is connected to SCLKO through a multiplexer.                                                                                                                                                                                                                                    |              |
| <b>SERI</b>  | <b>Serial Data In</b>                                                                                                                                                                                                                                                                                 | <b>Input</b> |
|              | Data on the Serial Data In pin is latched on the rising edge of SCLKI in the cycles where DVALID is HIGH. Serial Data In may be from either an MPEG system stream or an MPEG audio stream                                                                                                             |              |
|              | In Bypass mode, SERI is connected to SCLKO through a multiplexer.                                                                                                                                                                                                                                     |              |
| <b>WCLKI</b> | <b>Word Clock In</b>                                                                                                                                                                                                                                                                                  | <b>Input</b> |
|              | WCLKI is an optional PCM input and is not used internally by the L64111.                                                                                                                                                                                                                              |              |
|              | In Bypass mode, WCLKI is connected to WCLKO through a multiplexer.                                                                                                                                                                                                                                    |              |

## 3.2 DRAM Interface

The L64111 interfaces directly to DRAM, which is used for a Channel Buffer. The DRAM is required for the L64111 to operate properly.

|                |                                                                                                                                                                                                                                                                                                                                                     |                      |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>BA[8:0]</b> | <b>Buffer Address</b>                                                                                                                                                                                                                                                                                                                               | <b>Output</b>        |
|                | BA[8:0] are multiplexed address lines to the Channel Buffer DRAMs. When the L64111 asserts $\overline{\text{RAS}}$ , BA[8:0] contain the row address. When the L64111 asserts $\overline{\text{CAS}}$ , BA[8:0] contain the column address. The L64111 contains address line drivers so that no external components are required to drive the DRAM. |                      |
| <b>BD[3:0]</b> | <b>Buffer Data</b>                                                                                                                                                                                                                                                                                                                                  | <b>Bidirectional</b> |
|                | BD[3:0] are bidirectional data lines between the L64111 and the Channel Buffer DRAM.                                                                                                                                                                                                                                                                |                      |

|                         |                                                                                                                                                                                                                                                                             |               |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| $\overline{\text{CAS}}$ | <b>Column Address Strobe</b><br>$\overline{\text{CAS}}$ is the DRAM column address strobe. When asserted LOW, $\overline{\text{CAS}}$ indicates that BA[8:0] contain the column address.                                                                                    | <b>Output</b> |
| $\overline{\text{RAS}}$ | <b>Row Address Strobe</b><br>$\overline{\text{RAS}}$ is the DRAM row address strobe. When asserted LOW, $\overline{\text{RAS}}$ indicates that BA[8:0] contain the row address.                                                                                             | <b>Output</b> |
| $\overline{\text{WE}}$  | <b>Write Enable</b><br>The L64111 asserts $\overline{\text{WE}}$ LOW to write data into the Channel Buffer DRAM. The L64111 reads data from the Channel Buffer DRAM when both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are LOW with $\overline{\text{WE}}$ HIGH. | <b>Output</b> |

### 3.3 Controller Interface

This section describes the signals for the controller interface.

|                           |                                                                                                                                                                                                                                                                                                                                                                                         |                      |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| A[4:0]                    | <b>Address Bus</b><br>A[4:0] are address lines that provide access to the L64111 internal registers. Refer to Table 4.1 on page 4-3 for a listing of the registers and their respective addresses.                                                                                                                                                                                      | <b>Input</b>         |
| $\overline{\text{AS}}$    | <b>Address Strobe</b><br>When $\overline{\text{AS}}$ is asserted LOW, the L64111 latches the address on A[4:0]. $\overline{\text{AS}}$ may be tied to $\overline{\text{CSLDS}}$ if no $\overline{\text{AS}}$ signal is available from the system controller.                                                                                                                            | <b>Input</b>         |
| $\overline{\text{CSLDS}}$ | <b>Chip Select and Lower Data Strobe</b><br>$\overline{\text{CSLDS}}$ is the active-LOW chip select and data strobe for the least significant eight bits of the data bus (low byte).                                                                                                                                                                                                    | <b>Input</b>         |
| $\overline{\text{CSUDS}}$ | <b>Chip Select and Upper Data Strobe</b><br>$\overline{\text{CSUDS}}$ is the chip select and data strobe for the most significant eight bits of the data bus (high byte). When using 16-bit data on D[15:0], this strobe must always occur simultaneously with, or be preceded by, $\overline{\text{CSLDS}}$ . If operating with an eight-bit controller, this pin should be tied HIGH. | <b>Input</b>         |
| D[15:0]                   | <b>Data Bus</b><br>D[15:0] are bidirectional data bits. D[15:8] are the high byte; D[7:0] are the low byte. When operating in eight-bit mode only the low byte is used. Refer to Section 4.2, "Data Register," on page 4-3 for more information.                                                                                                                                        | <b>Bidirectional</b> |
| $\overline{\text{DTACK}}$ | <b>Data Acknowledge</b><br>$\overline{\text{DTACK}}$ is the active-LOW data acknowledge signal to the external controller. It is asserted for at least one cycle for every transaction                                                                                                                                                                                                  | <b>Output</b>        |

over the controller interface, and remains LOW until the end of the transaction and after both  $\overline{\text{CSUDS}}$  and  $\overline{\text{CSLDS}}$  have been deasserted. Note that the L64111 still asserts  $\overline{\text{DTACK}}$  on a write even if the Input Data FIFO is full and the write has resulted in an overflow.

#### **INT/MOT Interface Mode Select**

#### **Input**

When Interface Mode Select is tied HIGH, the L64111 latches data on the falling edge of READ during write cycles. When tied LOW, it latches data on the rising edge of READ during write cycles. This pin should not be toggled during normal operation.

#### **$\overline{\text{INTR}}$**

#### **System Interrupt**

#### **Output**

The L64111 asserts  $\overline{\text{INTR}}$  LOW to flag an interrupt.  $\overline{\text{INTR}}$  is an open drain output and requires a 1 Kohm pullup resistor to VCC. Pulling up  $\overline{\text{INTR}}$  allows multiple interrupts to be wire-ORed.

#### **READ**

#### **Read**

#### **Input**

The system controller asserts READ (HIGH) when reading from the L64111 and deasserts READ (LOW) when writing to the L64111. The system controller must assert  $\overline{\text{AS}}$  and  $\overline{\text{CSLDS}}$  during both read and write operations to the L64111.

### **3.4 FIFO Status Indicators**

The FIFO status flags operate in both serial and parallel input modes. The input FIFO and the channel buffer are unrelated, so these flags do not reflect the state of the channel buffer.

#### **$\overline{\text{FALE}}$**

#### **FIFO Almost Empty Flag**

#### **Output**

The L64111 asserts  $\overline{\text{FALE}}$  LOW to indicate that the L64111's internal 128-byte Input Data FIFO is almost empty—there are only 32 bytes of data left in the buffer (see Figure 3.2). It is *not* an error to let the FIFO empty completely.

#### **$\overline{\text{FALF}}$**

#### **FIFO Almost Full Flag**

#### **Output**

The L64111 asserts  $\overline{\text{FALF}}$  LOW to indicate that the L64111's internal 128-byte Input Data FIFO is almost full—there are only 32 unused bytes left in the buffer (see Figure 3.2). It is an error to let the FIFO overflow.


#### **$\overline{\text{FEMPTY}}$**

#### **FIFO Empty Flag**

#### **Output**

The L64111 asserts  $\overline{\text{FEMPTY}}$  LOW to indicate that the L64111's internal 128-byte Input Data FIFO is empty and new data should be provided to the FIFO (see Figure 3.2). It is *not* an error to let the FIFO empty completely.

Figure 3.2  
Input Data FIFO  
and Flags

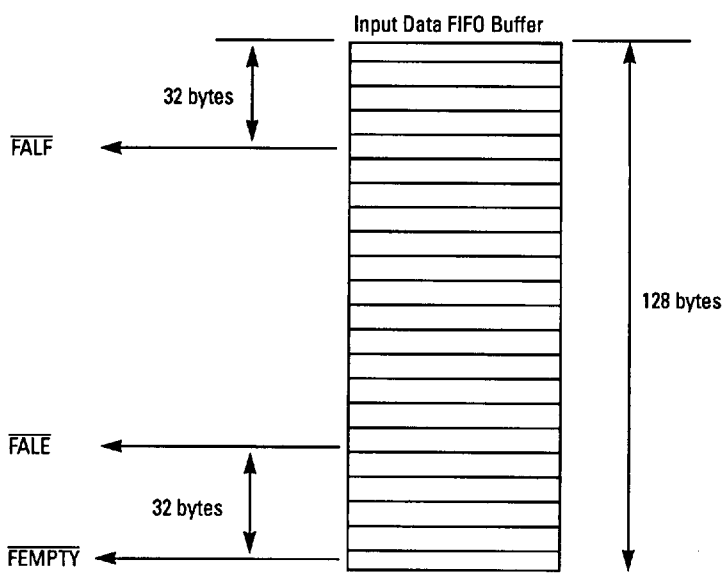

### 3.5 Other Control Signals

This section describes the remaining L64111 control signals.

#### **BYPASS** Decoder Bypass

#### **Input**

If BYPASS is set to one, all serial inputs (SERI, SCLKI, DVALID, and WCLKI) are routed directly to their respective outputs (SERO, SCLKO, LRCLKO, and WCLKO) with hard mute still functional. Note that there is no buffering of PCM input data in the channel buffer. In Bypass mode, the L64111 does not process data from the serial data input.

If BYPASS is set to zero, the L64111 processes the data from the serial input.

Bypass mode can also be selected by writing to the BYPASS bit in Control Register 1, in which case the BYPASS pin should be tied LOW.

#### **ERROR** Error Indication

#### **Input**

A LOW on the Error Indication pin indicates that the data on SERI has an error. Error Indication is used by the L64111 to conceal errors in the stream. A LOW on this pin also forces the L64111 to search for the next sync code as soon as it is released.  $\overline{\text{ERROR}}$  can be connected to an error correction chip in the channel that is capable of flagging an uncorrectable error. The error indication is propagated internally along with the data.

**HDMUTE Hard Mute****Input**

When HDMUTE is asserted HIGH, the L64111 forces the PCM output to zeros.

Mute operation can also be selected by writing to the SOFT\_MUTE bit in Control Register 2, in which case the HDMUTE pin may be tied LOW.

**RESET****Reset****Input**

The L64111 resets after RESET has been asserted HIGH for two clock cycles. RESET can be tied permanently LOW if the system controller software has been set up to assert the SOFT\_RST bit in Control Register 1 through the controller interface.

**SSEL****Serial Select****Input**

The SSEL input selects the L64111's source of data. If SSEL is HIGH, the decoder accepts the serial data entering through input pins SERI, SCLKI, and DVALID. If SSEL is LOW, the decoder accepts data in parallel format from the Controller Interface data lines.

Serial selection can also be done by writing to the SER/PAR bit in Control Register 1, in which case this pin may be tied LOW.

**STARTI****Start In****Input**

When Start In is asserted HIGH, the L64111 begins to decode the data in its Channel Buffer. The L64111 may also be started by writing to the STARTI bit in Control Register 1, in which case this pin may be tied HIGH.


**STARTO****Start Out****Output**

The STARTO pin is provided for designs having multiple MPEG audio decoders that must be synchronized. When using more than a single L64111, connect STARTO of the first device to STARTI of the second device, as illustrated in Figure 3.3. STARTO is asserted HIGH when device begins decoding stored frames from the channel buffer.

**SYSCLK****System Clock****Input**

System Clock is a 50% duty cycle clock which is at least 384 times the maximum L64111 output sample frequency. System Clock should have crystal accuracy for best audio quality.

**Figure 3.3**  
*Use of STARTI and  
 STARTO Signals*

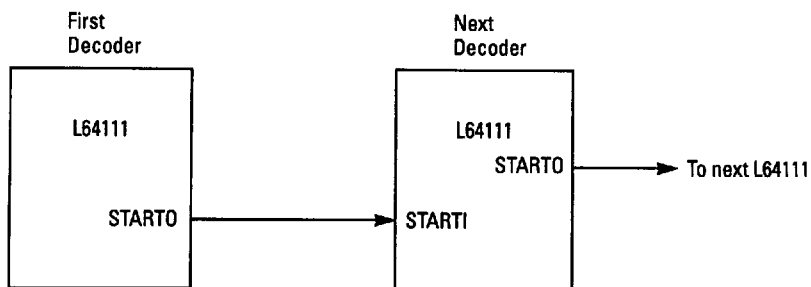

### 3.6 PCM Audio Outputs

The functions of the PCM Audio Output pins may be programmed to support a variety of common D to A converters.

|               |                                                                                                                                                                                                                                        |               |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>DACLK</b>  | <b>DAC Clock Out</b>                                                                                                                                                                                                                   | <b>Output</b> |
|               | DACLK is a clock which is half the frequency of SYSCLK. DACLK can be used to clock certain oversampling DACs.                                                                                                                          |               |
| <b>LRCLKO</b> | <b>Left/Right Channel Indicator Out</b>                                                                                                                                                                                                | <b>Output</b> |
|               | LRCLKO indicates whether the current data output on SERO is left channel (LRCLKO = HIGH) or right channel (LRCLKO = LOW) information. In Bypass mode, the LRCLKO pin is a reflection of DVALID.                                        |               |
| <b>SCLKO</b>  | <b>Serial Bit Clock Out</b>                                                                                                                                                                                                            | <b>Output</b> |
|               | SCLKO is the bit clock for the serial data on SERO. In Bypass mode this pin is a reflection of SCLKI.                                                                                                                                  |               |
| <b>SERO</b>   | <b>Serial Data Out</b>                                                                                                                                                                                                                 | <b>Output</b> |
|               | A serial 16 bit word, sign extended with MSB first, for each of the left and right channels, synchronized to SCLKO. The actual format may be programmed through the system interface. In Bypass mode this pin is a reflection of SERI. |               |
| <b>WCLKO</b>  | <b>Word Clock Out</b>                                                                                                                                                                                                                  | <b>Output</b> |
|               | Transitions from HIGH to LOW on both edges of LRCLK. This signal is synchronized to SCLKO. In bypass mode, the WCLKO pin is a reflection of WCLKI.                                                                                     |               |

# Chapter 4

## Registers

---

Chapter 4 discusses the L64111's internal registers. These registers configure and control the operation of the L64111, and monitor the operating status of the L64111. This chapter contains the following sections:

- Section 4.1, Register Operation and Summary
- Section 4.2, Data Register
- Section 4.3, Control Registers
- Section 4.4, Interrupt Registers
- Section 4.5, Timer Countdown and Offset Registers
- Section 4.6, Parametric Data Word Registers
- Section 4.7, Presentation Time Stamp (PTS) Registers
- Section 4.8, Ancillary/User Data FIFO
- Section 4.9, Channel Buffer Registers

---

**4.1  
Register  
Operation and  
Summary**

The L64111 can operate either as a stand-alone device or in applications that use a system controller. In stand-alone operation, the L64111 operates according to the register field default values except as noted later.

Operating the L64111 with a system controller allows the full range of operating capabilities. A system controller provides register values and interrupt processing control. A system controller is typically used when it is necessary to synchronize audio and video decoders, or provide operating parameter value flexibility. A system controller can also convert ancillary data in the audio stream to text for visual display.

Table 4.1 lists the L64111's registers. Note that registers designated as read-only must not be written, because the write capability of certain registers may be reserved for use only with test parameters.

**Table 4.1**  
**L64111 Registers**

| <i>Address</i><br><i>A[4:0]</i> | <i>Register Name</i>            | <i>Description</i>                                                                | <i>Read / Write</i><br><i>Capability</i> |
|---------------------------------|---------------------------------|-----------------------------------------------------------------------------------|------------------------------------------|
| 0                               | Data                            | Data input                                                                        | Write-only                               |
| 1                               | Control Register 1              | Configuration                                                                     | Read / Write                             |
| 2                               | Control Register 2              | Configuration                                                                     | Read / Write                             |
| 3                               | Control Register 3              | Configuration                                                                     | Read / Write                             |
| 4                               | Interrupt and Status Register 1 | Contains status of interrupt sources; allows enabling/disabling interrupt sources | Read / Write                             |
| 5                               | Interrupt and Status Register 2 | Contains status of interrupt sources; allows enabling/disabling interrupt sources | Read / Write                             |
| 6                               | Timer Countdown Register (TCR)  | Reference Value for Clock Divider                                                 | Read / Write                             |
| 7                               | Timer Offset Register H (TORH)  | High Byte of Timer                                                                | Read / Write                             |
| 8                               | Timer Offset Register L (TORL)  | Low Byte of Timer                                                                 | Read / Write                             |
| 9                               | Parametric Data Word 1          | Audio Frame Header Information                                                    | Read-only                                |
| 10                              | Parametric Data Word 2          | Audio Frame Header Information                                                    | Read-only                                |
| 11                              | Parametric Data Word 3          | Audio Frame Header Information                                                    | Read-only                                |
| 12                              | Presentation Time Stamp 1       | PTS lowest byte                                                                   | Read-only                                |
| 13                              | Presentation Time Stamp 2       | PTS data                                                                          | Read-only                                |
| 14                              | Presentation Time Stamp 3       | PTS data                                                                          | Read-only                                |
| 15                              | Presentation Time Stamp 4       | PTS data                                                                          | Read-only                                |
| 16                              | Presentation Time Stamp 5       | PTS highest byte                                                                  | Read-only                                |
| 17                              | Ancillary/User Data FIFO        | Used for access to output of FIFO                                                 | Read-only                                |
| 18                              | Channel Buffer Status Counter   | Channel Buffer Storage Capacity                                                   | Read-only                                |
| 19                              | Channel Buffer Write Counter    | Pointer to the next write                                                         | Read / Write                             |
| 20                              | Channel Buffer Read Counter     | Pointer to the next read                                                          | Read / Write                             |
| 21-31 Reserved                  |                                 |                                                                                   |                                          |

## **4.2** **Data Register**

The L64111 has one Data Register. The Data Register is connected to Controller Interface pins D[15:0]. The L64111 transfers parallel MPEG data through this register.

Address A[4:0] = 00000<sub>2</sub>

|     |     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9  | 8  | 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

Low byte used for register access and  
for MPEG data in eight-bit parallel format

MPEG data can also be written by the controller to this register in 16-bit parallel format

### Data

### Data

[15:0]

The Data Register is write-only. The usable width of this register is either 8 or 16 bits, depending on the setting for the width of the Controller Interface data path, which is controlled by bit 4 (SEL\_16/8\_BIT) of Control Register 2.

When eight-bit I/O is selected, the Data Register accepts the lowest eight data bits D[7:0] from the Controller Interface data pins; the highest eight bits are ignored. Eight-bit width mode is automatically selected on reset.

When the L64111 is set for 16-bit I/O, all Controller Interface data bits D[15:0] are accepted. 16-bit I/O is useful for increased performance with controllers capable of transferring 16 bits of data at a time.

## 4.3 Control Registers

The Control registers are located at addresses 1 through 3. These registers set up and configure the L64111 and monitor its operating status.

**Control Register 1** Control Register 1 is an eight-bit register accessed through data bits D[7:0].

Address A[4:0] = 00001<sub>2</sub>

|                      |         |        |          |          |         |          |        |
|----------------------|---------|--------|----------|----------|---------|----------|--------|
| 7                    | 6       | 5      | 4        | 3        | 2       | 1        | 0      |
| ANC DATA<br>FIFO RST | SER/PAR | BYPASS | RESERVED | RESERVED | BUF_RST | SOFT_RST | STARTI |

## ANC DATA FIFO RST

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
|                 | <b>Ancillary Data FIFO Reset</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>7</b>     |
|                 | When this bit is set to one, the L64111 clears/empties the Ancillary Data FIFO on the next clock cycle. The bit must then be set back to zero to enable the FIFO. The default for this bit upon system reset is zero (FIFO enabled).                                                                                                                                                                                                                                                                                                                                                     |              |
| <b>SER/PAR</b>  | <b>Serial/Parallel Input Select</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>6</b>     |
|                 | When SER/PAR is one, the L64111 uses the SERI input as the source of MPEG data. When this bit is zero, the L64111 selects MPEG data from the Controller Interface data bus D[15:0] when A[4:0] = 00000 <sub>2</sub> . The L64111 uses the OR of this bit and the SSEL pin to select the Serial or Parallel mode. This means that if the SSEL pin is high the device will always be in Serial input mode. The L64111 uses the value of the logical OR of this bit and the SSEL pin to determine if the mode is Parallel or Serial. The default value of this bit is zero (parallel mode). |              |
| <b>BYPASS</b>   | <b>Bypass Mode</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>5</b>     |
|                 | The BYPASS bit determines whether the L64111 operates in MPEG mode (BYPASS = 0) or Bypass mode (BYPASS = 1). The L64111 uses the logical OR of this bit and the BYPASS pin to determine if the Bypass mode is selected. If the BYPASS pin is high, the device will always be in Bypass mode. The default value of this bit is zero (not bypassed).                                                                                                                                                                                                                                       |              |
| <b>RESERVED</b> | <b>Reserved</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>[4:3]</b> |
|                 | Set the RESERVED bits to zero to maintain compatibility with future L64111 revisions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |
| <b>BUF_RST</b>  | <b>Buffer Reset</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>2</b>     |
|                 | When this bit is set to one, the Channel Buffer is emptied on the next clock cycle. The L64111 does not reset this bit to zero after emptying the Channel Buffer. The default value for this bit upon system reset is zero. Note that the L64111 empties the Channel Buffer when RESET is asserted or SOFT_RST is set to one.                                                                                                                                                                                                                                                            |              |
| <b>SOFT_RST</b> | <b>Soft System Reset</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>1</b>     |
|                 | Setting this bit to one causes the L64111 to reset itself on the next clock cycle. After resetting itself, the L64111 sets this bit to zero. The default value for this bit upon system reset is zero. The value used by the L64111 to determine reset is the logical OR of the RESET pin and the SOFT_RESET bit.                                                                                                                                                                                                                                                                        |              |

**STARTI****Decoder Start****0**

When this bit is one, the decoder functional block starts on the next clock cycle. If the Channel Buffer is empty, the decoder does not start until the Channel Buffer has received data. If this bit and the STARTI input pin are both HIGH, the decoder is enabled, and starts to play. When this bit is zero, the decoder is reset on the next cycle. The default value for this bit upon system reset is the state of the STARTI pin.

**Control Register 2**

Control Register 2 is an eight-bit register accessed through Controller Interface data bits D[7:0]. It is used to set up and control various functions as described in following paragraphs.

Address A[4:0] = 00010<sub>2</sub>

|           |           |              |            |     |          |   |   |
|-----------|-----------|--------------|------------|-----|----------|---|---|
| 7         | 6         | 5            | 4          | 3   | 2        | 1 | 0 |
| MUTE[1:0] | SOFT_MUTE | SEL_16/8_BIT | AUDIO ONLY | I2S | PCM MODE |   |   |

**MUTE[1:0]****Mute Control****[7:6]**

This field determines the decoder's response to errors. An error occurs if any of the following conditions are detected: CRC errors, grammar errors in input data, or assertion of the ERROR input pin. The Play Director uses these two bits as follows:

**MUTE[1:0] Description**

|    |                                                                    |
|----|--------------------------------------------------------------------|
| 00 | Errors are ignored                                                 |
| 01 | On error, PCM output is muted                                      |
| 10 | On error, the error is concealed by replaying the last valid frame |
| 11 | Reserved. Do not use this value.                                   |

The default value for this field upon system reset is 00<sub>2</sub>.

**SOFT\_MUTE****Software Controlled Mute****5**

When this bit is set to one, the L64111 forces the PCM output to zero, which mutes the output. Hard mute operation is controlled by the logical OR of the SOFT\_MUTE bit and the HDMUTE pin. The default value for this bit upon system reset is zero. When read, the value of SOFT\_MUTE is the logical OR of the SOFT\_MUTE bit and the HDMUTE pin.

## SEL\_16/8\_BIT Data Width Select

4

When this bit is one, the L64111 accepts 16-bit wide data on D[15:0]. When this bit is zero, the L64111 accepts 8-bit wide data on D[7:0] and ignores data bits D[15:8]. The L64111 only uses the 16-bit format for MPEG data; all control registers are eight bits wide. The default value for this bit upon system reset is zero.

## AUDIO ONLY Audio Only

3

When this bit is one, the L64111 assumes that the input data stream is an MPEG audio stream. When this bit is zero, the L64111 assumes that input data is an ISO System Stream requiring full system processing to retrieve MPEG audio frames. Upon system reset, the value of this bit is set to the value of address line A4, which allows mode selection for stand-alone operation.

## I2S

### I2S Protocol

2

When this bit is one, the L64111 produces an I2S compatible protocol on the PCM output by delaying the data bit one SCLK cycle with respect to LRCLK. When this bit is zero, the PCM output is in standard mode.

## PCM MODE

### PCM Output Mode

[1:0]

These bits modify the PCM output in accordance with the table shown below. In each of the three PCM modes, the data is bit serial MSB first with sign extended. See the subsection entitled "Setting the PCM Output Mode" in Chapter 6 for more information.

| <i>PCM MODE[1:0]</i> | <i>Description</i> |
|----------------------|--------------------|
| 00                   | 32 fs              |
| 01                   | 64 fs              |
| 10                   | 48 fs              |
| 11                   | Reserved           |

**Control Register 3** Control Register 3 is an eight-bit register accessed through Controller Interface data bits D[7:0] that selects an audio channel from the incoming data stream.

Address A[4:0] = 00011<sub>2</sub>

| 7                      | 6        | 5 | 4 | 3                       | 2 | 1 | 0 |
|------------------------|----------|---|---|-------------------------|---|---|---|
| AUDIO_STREAM_ID_IGNORE | RESERVED |   |   | AUDIO_STREAM_IDENTIFIER |   |   |   |

#### AUDIO\_STREAM\_ID\_IGNORE

##### Ignore Audio Stream Identifier 7

When this bit is one, the L64111 responds to all audio streams and ignores the AUDIO\_STREAM\_IDENTIFIER value on bits [4:0]. When this bit is zero, the L64111 decodes only the audio streams with the audio ID value given in bits [4:0]. The default value of this bit upon system reset is one.

##### RESERVED **Reserved** [6:5]

Set these bits to zero to maintain compatibility with future revisions.

#### AUDIO\_STREAM\_IDENTIFIER

##### Audio Stream Identifier [4:0]

The MPEG stream contains a packet start code with a five-bit audio stream identifier. A system controller may write to this register field to program the L64111 to respond only to the specified audio stream. Upon switching streams, resynchronization takes place automatically. The time taken depends on the nature of the bitstream and the number of times the L64111 finds an emulated sync code before finding an actual sync code. Once an actual sync code is found, the L64111 synchronizes within three frames. These bits are ignored if operating with an audio stream only.

#### 4.4 Interrupt Registers

Registers at addresses 4 and 5 provide monitoring and control of interrupts. The L64111 is capable of generating individually maskable interrupts in response to various internal events. An interrupt is enabled by writing a one to the location corresponding to a particular interrupt status bit. Writing a zero disables that interrupt. After a system reset, all interrupts are disabled.

When the system controller services an interrupt, it must read both registers because reading either of the registers deasserts the  $\overline{\text{INTR}}$  output.

#### Interrupt Mask and Status Register 1

Interrupt Mask and Status Register 1 are eight-bit registers accessed through Controller Interface bits D[7:0]. They monitor the L64111's current status. A write to this location writes to Interrupt Mask 1. A read from this location reads Status Register 1. The Status Register 1 fields are defined following the registers.

Interrupt Mask 1 (Write Only)

Address A[4:0] = 00100<sub>2</sub>

| 7              | 6                   | 5                 | 4        | 3            | 2        | 0 |
|----------------|---------------------|-------------------|----------|--------------|----------|---|
| ANC DATA VALID | ANC DATA FIFO OVRFL | ANC DATA FIFO HFF | RESERVED | ERR BUF OVFL | RESERVED |   |

Status Register 1 (Read Only)

Address A[4:0] = 00100<sub>2</sub>

| 7              | 6                   | 5                 | 4 | 3            | 2 | 0 |
|----------------|---------------------|-------------------|---|--------------|---|---|
| ANC DATA VALID | ANC DATA FIFO OVRFL | ANC DATA FIFO HFF | 0 | ERR BUF OVFL | 0 |   |

#### ANC DATA VALID

##### Ancillary Data In FIFO is Valid

7

When set to one, this bit indicates that the Ancillary Data FIFO contains valid data. This bit does not cause an interrupt unless the Ancillary Data FIFO was previously empty. This bit continues to reflect the status of the Ancillary Data FIFO after Status Register 1 has been read and also after the FIFO has been read. A zero in this bit indicates that the Ancillary Data FIFO contains no data. Bit 7 in Interrupt Mask 1 masks this bit.

#### ANC DATA FIFO OVRFL

##### Ancillary Data In FIFO Overflowed

6

When set to one, this bit indicates that the Ancillary Data FIFO contains valid data and the FIFO is full, resulting in overflow.

This bit causes a single interrupt when the FIFO starts to overflow and does not interrupt again until the FIFO has been read from and starts to overflow again. This bit continues to reflect the status of the Ancillary Data FIFO after Status Register 1 has been read. Bit 6 in Interrupt Mask 1 masks this bit.

#### ANC DATA FIFO HFF

##### Ancillary Data FIFO Half Full Flag 5

When set to one, this bit indicates that the Ancillary Data FIFO is half full. Data may be lost if the FIFO is not read soon. This bit causes a single interrupt each time the FIFO passes over the half-full threshold in the high direction; another interrupt will not occur until the FIFO has been read, drops below, and then recrosses the half-full threshold. This bit continues to reflect the status of the Ancillary Data FIFO after Status Register 1 has been read. Bit 5 in Interrupt Mask 1 masks this bit.

#### RESERVED Reserved 4, [2:0]

Set these bits to zero to maintain software compatibility with future revisions.

#### ERR BUFF OVFL

##### Channel Buffer Overflow Error 3

When set to one, this bit indicates that the Channel Buffer has overflowed and data is being lost. Channel Buffer overflow is an error that results in missing samples in the PCM output. The effect may or may not be audible. Bit 3 in Interrupt Mask 1 masks this bit.

#### Interrupt Mask and Status Register 2

Interrupt Mask and Status Register 2 are eight-bit registers accessed through Controller Interface data bits D[7:0]. They monitor the L64111's current status. A write to this location writes to Interrupt Mask 2. A read from this location reads Status Register 2.

Interrupt Mask 2 (Write Only)

Address A[4:0] = 00101<sub>2</sub>

| 7              | 6             | 5        | 4        | 3               | 2       | 1             | 0          |
|----------------|---------------|----------|----------|-----------------|---------|---------------|------------|
| SYNTAX ERR DET | PTS AVAILABLE | SYNC AUD | SYNC SYS | FRAME DETECT IN | CRC ERR | NEW FRAME OUT | LAST FRAME |

## Status Register 2 (Read Only)

Address A[4:0] = 00101<sub>2</sub>

| 7 | 6              | 5             | 4        | 3        | 2               | 1       | 0                        |
|---|----------------|---------------|----------|----------|-----------------|---------|--------------------------|
| 0 | SYNTAX ERR DET | PTS AVAILABLE | SYNC AUD | SYNC SYS | FRAME DETECT IN | CRC ERR | NEW FRAME OUT/LAST FRAME |

The Status Register 2 fields are defined below. Each field has a corresponding mask in the Interrupt Mask 2 Register.

**0** **0** **7**  
This bit reads as a zero.

**SYNTAX ERR DET****Syntax Error Detected** **6**

When set to one, this bit indicates that the L64111 has detected a syntax error in either the ISO System Stream or in the audio stream. Bit 7 in Interrupt Mask 2 masks this bit.

**PTS AVAILABLE****Presentation Time Stamp Available** **5**

When set to one, this bit indicates that the Presentation Time Stamp register contains a valid time stamp. The L64111 generates an interrupt only when this bit goes from zero to one. Bit 6 in Interrupt Mask 2 masks this bit.

**SYNC AUD****Synchronized Audio** **4**

When set to one, this bit indicates that the L64111 is synchronized to the audio stream. The L64111 is considered synchronized after it has seen audio sync patterns in the correct location within three successive audio frames. The L64111 generates an interrupt when this bit goes from zero to one. Bit 5 in Interrupt Mask 2 masks this bit.

**SYNC SYS****Synchronized System** **3**

When set to one, this bit indicates that the L64111 is synchronized to the system stream. The L64111 is considered synchronized after it has seen three consecutive system sync patterns in the correct location within the ISO System Stream. The L64111 generates an interrupt when this bit goes from zero to one. Bit 4 in Interrupt Mask 2 masks this bit.

**FRAME DETECT IN****Frame Detect Input** **2**

When set to one, this bit indicates that a new frame is being processed. The parametric data word is valid and can be read for that frame. Bit 3 in Interrupt Mask 2 masks this bit.

**CRC ERR**      **CRC Error**      **1**

This bit is set to one when a CRC error has been detected. When an audio frame has a CRC error, the L64111 attaches its own internal flag to that frame's data and uses the flag to identify the frame as one having an error. Refer to the MUTE field description on page 4-6 for an example. Bit 2 in Interrupt Mask 2 masks this bit.

**NEW FRAME OUT/LAST FRAME**

**New Frame/Last Frame on Output**      **0**

When set to one, this bit indicates that the L64111 has completed a frame and either the frame is being sent to the PCM output (New Frame Out) or there is only one frame in the channel buffer (Last Frame). The L64111 generates an interrupt when this bit goes from zero to one. Bit 1 in Interrupt Mask 2 masks the NEW FRAME OUT interrupt. Bit 0 in Interrupt Mask 2 masks the LAST FRAME interrupt.

#### 4.5 Timer Countdown and Offset Registers

The following registers set the PCM Serial Output Clock (SCLKO) rate:

- Timer Countdown Register (TCR)
- Timer Offset Register High (TORH)
- Timer Offset Register Low (TORL)

The four-bit value in the TCR register is used as a terminal count. The 16-bit value formed from the TORH and TORL registers is used as the correction fraction, which is covered in more detail in Chapter 6.

#### Timer Countdown Register (TCR)

The TCR register provides the Terminal Count value, which determines the SCLKO clock rate. SCLKO makes one transition for every  $n$  transitions of SYCLK. The value of  $n$  must be loaded into TCR[3:0].


Address A[4:0] = 00110<sub>2</sub>

|          |   |   |   |     |   |
|----------|---|---|---|-----|---|
| 7        | 6 | 5 | 4 | 3   | 0 |
| RESERVED |   |   |   | TCR |   |

**Timer Offset  
Register High  
(TORH)**

The TORH register stores the eight most significant bits of the 16-bit word that contains the fractional part of the PCM timer. Note that the decimal point is located just prior to bit seven of the TORH register. TORH and TORL together provide the fractional portion of the PCM timer. The TCR register provides the integer portion of the SCLKO rate.


Address A[4:0] = 00111<sub>2</sub>



**Timer Offset  
Register Low  
(TORL)**

The TORL register stores the least-significant fractional part of the PCM timer. TORL is accessed using Controller Interface bits D[7:0].

Address A[4:0] = 01000<sub>2</sub>



**4.6  
Parametric Data  
Word Registers**

There are three eight-bit Parametric Data Word registers that contain the 20 header bits of the MPEG packet remaining after the 12-bit sync word 0xFFF has been stripped out. Each register can be read through Controller Interface data bits D[7:0]. The data in the Parametric Data Word registers is valid when the FRAME DETECT IN bit of Interrupt and Status Register 2 is set HIGH.

Note that the data must be read before the next frame overwrites it. The data remains valid for a minimum of seven milliseconds after the FRAME DETECT IN flag in Interrupt and Status Register 2 goes high. Reading the FRAME DETECT IN bit in the register again to determine if the data is still valid is not sufficient, since the FRAME DETECT IN bit goes HIGH only after the Parametric Data has been overwritten.

**Parametric Data Word Register 1** The Parametric Data Register 1 contains the audio frame header data parsed from the stream. For complete details, consult ISO CD 11172-3.

Address A[4:0] = 01001<sub>2</sub>

|    |             |                |                |   |   |
|----|-------------|----------------|----------------|---|---|
| 7  | 6           | 5              | 4              | 3 | 0 |
| ID | Layer [1:0] | protection_bit | bit_rate_index |   |   |

**ID** **Coding Type ID** 7  
The ID bit indicates the ID of the algorithm. A one indicates MPEG; a zero indicates non-MPEG.

**Layer [1:0]** **Layer ID Number** [6:5]  
The Layer field indicates the MPEG Layer used. The following table lists the encoding of the Layer field. The L64111 flags a syntax error if it sees Layer ID = 00 or 01.

| <i>Layer ID</i> | <i>Layer</i> |
|-----------------|--------------|
| 11              | Layer I      |
| 10              | Layer II     |
| 01              | Layer III    |
| 00              | Reserved     |

**protection\_bit** **Protection** 4  
This bit indicates whether CRC has been added to the audio bit-stream. The L64111 can not detect CRC errors unless this bit is cleared to zero by the encoder.

**bit\_rate\_index** **Bit Rate Index** [3:0]  
The bit\_rate\_index bit provides a pointer into a table indicating the bit rate. The table provides different values for a given pointer depending on the MPEG Layer. Illegal combinations of bit rate index, layer, and channel mode produce a syntax error on the L64111.

| <i>Index</i> | <i>Layer 1 Bit Rate</i> | <i>Layer 2 Bit Rate</i> |
|--------------|-------------------------|-------------------------|
| 0000         | free format             | free format             |
| 0001         | 32                      | 32 †                    |
| 0010         | 64                      | 48 †                    |
| 0011         | 96                      | 56 †                    |
| 0100         | 128                     | 64                      |
| 0101         | 160                     | 80 †                    |
| 0110         | 192                     | 96                      |
| 0111         | 224                     | 112                     |
| 1000         | 256                     | 128                     |
| 1001         | 288                     | 160                     |
| 1010         | 320                     | 192                     |
| 1011         | 352                     | 224 †                   |
| 1100         | 384                     | 256 †                   |
| 1101         | 416                     | 320 †                   |
| 1110         | 448                     | 384 †                   |
| 1111         | reserved                | reserved                |

1. † Mono (single channel) only.

2. † Stereo, intensity stereo, dual channel only.

**Parametric Data Word Register 2** Parametric Data Register 2 contains additional audio frame header data parsed from the stream. For additional details, consult ISO CD 11172-3.

Address A[4:0] = 01010<sub>2</sub>

|                          |             |               |            |                      |   |   |   |
|--------------------------|-------------|---------------|------------|----------------------|---|---|---|
| 7                        | 6           | 5             | 4          | 3                    | 2 | 1 | 0 |
| sampling_frequency [1:0] | padding_bit | extension_bit | mode [1:0] | mode_extension [1:0] |   |   |   |

**sampling\_frequency [1:0]**

**Sampling Frequency ID**

[7:6]

This two-bit field indicates the sampling frequency as follows:

| <i>sampling_frequency</i> | <i>Frequency</i> |
|---------------------------|------------------|
| 00                        | 44.1 KHz         |
| 01                        | 48 KHz           |
| 10                        | 32 KHz           |
| 11                        | Reserved         |

**padding\_bit**      **Padding**      **5**  
For MPEG stream decoder internal use.

**extension\_bit**      **Extension**      **4**  
The value in this field is not used.

**mode [1:0]**      **Channel Mode**      **[3:2]**  
Indicates the channel mode as follows:

| <i>Mode</i> | <i>Channel Mode Used</i>                         |
|-------------|--------------------------------------------------|
| 00          | Stereo                                           |
| 01          | Joint stereo (intensity stereo and/or ms stereo) |
| 10          | Dual channel                                     |
| 11          | Single channel                                   |

**mode\_extension [1:0]**      **Mode Extension**      **[1:0]**  
This field is used in joint stereo mode. In Layer I and II this field indicates which subbands are in intensity stereo. All other subbands are coded in stereo.

| <i>Mode_Extension</i> | <i>Subbands</i>           |
|-----------------------|---------------------------|
| 00                    | 4-31 in intensity stereo  |
| 01                    | 8-31 in intensity stereo  |
| 10                    | 12-31 in intensity stereo |
| 11                    | 16-31 in intensity stereo |

**Parametric Data Word Register 3**      Parametric Data Register 3 contains additional audio frame header data parsed from the stream. For more details, consult ISO CD 11172-3.

Address A[4:0] = 01011<sub>2</sub>

|           |               |                |          |   |   |
|-----------|---------------|----------------|----------|---|---|
| 7         | 6             | 5              | 4        | 3 | 0 |
| copyright | original/home | emphasis [1:0] | Reserved |   |   |

**copyright**      **Copyright Flag**      **7**  
A one in this bit indicates that the data is copyrighted. A zero indicates that the coded bitstream is not copyright protected.

**original/home**      **Originator Copy**      **6**  
A one in this bit indicates that the bitstream contains original data. A zero indicates that the bitstream is a copy.

**emphasis**
**Emphasis**
**[5:4]**

This field indicates the type of de-emphasis to be used:

| <i>Emphasis</i> | <i>Type of De-emphasis to Use</i> |
|-----------------|-----------------------------------|
| 00              | No emphasis                       |
| 01              | 50/15 microsecond emphasis        |
| 10              | Reserved                          |
| 11              | CCITT J.17                        |

**Reserved**
**[3:0]**

Reserved for future use.

#### 4.7 Presentation Time Stamp (PTS) Registers

These five eight-bit registers contain the current Presentation Time Stamp. Each register may be read through Controller Interface data bits D[7:0]. This data is valid when the PTS AVAILABLE field, is set HIGH. It is overwritten when the next presentation time stamp is parsed. The data stored here is as specified in Section 2.4.3 of the MPEG Systems CD 11172-1. This data is only valid if the L64111 is decoding a system stream, and is synchronized to that stream.

| Address<br>A[4:0]  | Register<br># | 7          | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|--------------------|---------------|------------|---|---|---|---|---|---|-------|
| 01100 <sub>2</sub> | PTS1          | pts[7:0]   |   |   |   |   |   |   |       |
| 01101 <sub>2</sub> | PTS2          | pts[15:8]  |   |   |   |   |   |   |       |
| 01110 <sub>2</sub> | PTS3          | pts[23:16] |   |   |   |   |   |   |       |
| 01111 <sub>2</sub> | PTS4          | pts[31:24] |   |   |   |   |   |   |       |
| 10000 <sub>2</sub> | PTS5          | 0          |   |   |   |   |   |   | pts32 |

#### 4.8 Ancillary/User Data FIFO

This eight-bit register represents the top of a 16 by 8 bit FIFO that contains any Ancillary/User data from the current stream. Successive reads from this register will read the next byte in the FIFO.

The FIFO is filled in MSB order, that is, the first bit in the stream becomes bit 7 on the top of the FIFO, the second bit in the stream becomes bit 6 in the top of the FIFO, and so on. The ninth bit in the stream becomes bit 7 in

the second location in the FIFO, and so on. Ancillary data for the next frame is appended to that from the previous frame.

The FIFO is accessed through Controller Interface bits D[7:0]. The FIFO contains valid data as long as the ANC DATA VALID bit is HIGH.

Address A[4:0] = 10001<sub>2</sub>

| 7              | 6              | 5              | 4              | 3              | 2              | 1              | 0              |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| FIFO TOP BIT 7 | FIFO TOP BIT 6 | FIFO TOP BIT 5 | FIFO TOP BIT 4 | FIFO TOP BIT 3 | FIFO TOP BIT 2 | FIFO TOP BIT 1 | FIFO TOP BIT 0 |

#### 4.9 Channel Buffer Registers

The L64111 contains three registers that control the Channel Buffer. These registers are the Channel Buffer Status Counter, the Channel Buffer Write Counter, and the Channel Buffer Read Counter.

##### Channel Buffer Status Counter

The Channel Buffer Status Counter is a read-only register, which contains a seven-bit value that indicates the current storage capacity of the Channel Buffer. The Channel Buffer Status Counter is a counter ranging from 0 to 127 in Layer 1, and 0 to 63 in Layer 2. Each layer 2 frame occupies twice as much space as a layer 1 frame, but plays for twice as long.

This register may be read to determine whether the Channel Buffer is filling up too fast or slow with respect to the output rate.

The Channel Buffer Status Counter may be read on Controller Interface bits D[6:0].

Address A[4:0] = 10010<sub>2</sub>

| 7        | 6                       | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-------------------------|---|---|---|---|---|---|
| Reserved | CB_Status_Counter [6:0] |   |   |   |   |   |   |

##### Channel Buffer Write Counter

The Channel Buffer Write Counter is a double-buffered read/write register, which contains a seven-bit value used as a pointer to the location in the Channel Buffer of the current frame to be written. The pointer may be in the range zero to 127 (0 to 63 for Layer 2). The buffer is maintained as a circular buffer, thus location 0 is immediately after 127.

A write to this register sets the location of the next Channel Buffer write operation and determines where the next byte of data will be written in the Channel Buffer. This feature may be used in implementing cue and review. Once the register is written it will automatically increment as required. However, the Channel Buffer Status register will not necessarily reflect the true channel status, and the channel full/empty interrupts will not work. If cue and review is not required do not write to this register.

Address A[4:0] = 11010<sub>2</sub>

| 7        | 6                      | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|------------------------|---|---|---|---|---|---|
| Reserved | CB_Write_Counter [6:0] |   |   |   |   |   |   |

#### Channel Buffer Read Counter

The Channel Buffer Read Counter is a double-buffered read/write register, which contains a seven-bit value used as a pointer to the next audio frame to be read out of the Channel Buffer. The pointer may be in the range 0 to 127 (0 to 63 for Layer 2).

A write to this register sets the location of the next Channel Buffer read operation and determines where the following read in the Channel Buffer will be made. If the write falls after the clock set up then the new value is used only after the next clock cycle.

This feature is useful for cue and review; the user may control what sample should be read next and what samples should be skipped. The user can “skip” around in the frame. Note that while the frames may be played in reverse order for review, the samples themselves will be played in the forward direction. Once the register is written it automatically increments as required. However, the Channel Buffer Status register will not necessarily reflect the true channel status, and the channel full/empty interrupts will not work. If cue and review is not required do not write to this register.

Address A[4:0] = 11001<sub>2</sub>

| 7        | 6                     | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-----------------------|---|---|---|---|---|---|
| Reserved | CB_Read_Counter [6:0] |   |   |   |   |   |   |

# Chapter 5

## Specifications

---

Chapter 5 presents specifications for the L64111 MPEG Audio Decoder. This chapter contains the following sections:

- Section 5.1, Electrical Characteristics
- Section 5.2, AC Timing
- Section 5.3, Pinouts
- Section 5.4, Mechanical Specifications
- Section 5.5, Ordering Information

## 5.1 Electrical Characteristics

This section specifies the electrical requirements for the L64111. Electrical data is presented in the following categories:

- Absolute Maximum Ratings
- Recommended Operating Conditions
- Capacitance
- DC Characteristics
- Pin Description Summary

**Table 5.1**  
*Absolute Maximum  
Ratings*

| <i>Symbol</i> | <i>Parameter</i>             | <i>Limits</i>     | <i>Units</i> |
|---------------|------------------------------|-------------------|--------------|
| VDD           | DC supply voltage            | -0.3 to +7        | V            |
| VIN           | Input voltage                | -0.3 to VDD + 0.3 | V            |
| IIN           | DC input current             | 10                | mA           |
| TSTGC         | Storage temperature, ceramic | -65 to +150       | °C           |
| TSTGP         | Storage temperature, plastic | -40 to +125       | °C           |

**Table 5.2**  
*Recommended  
Operating  
Conditions*

| <i>Symbol</i> | <i>Parameter</i>                | <i>Limits</i>  | <i>Units</i> |
|---------------|---------------------------------|----------------|--------------|
| VDD           | DC supply voltage               | +4.75 to +5.25 | V            |
| TA            | Ambient temperature, commercial | 0 to +70       | °C           |

**Table 5.3**  
*Capacitance*

| <i>Symbol</i>    | <i>Parameter<sup>1</sup></i> | <i>Min</i> | <i>Typ</i> | <i>Max</i> | <i>Units</i> |
|------------------|------------------------------|------------|------------|------------|--------------|
| C <sub>IN</sub>  | Input Capacitance            |            |            | 5          | pF           |
| C <sub>OUT</sub> | Output Capacitance           |            |            | 10         | pF           |
| C <sub>IO</sub>  | I/O Bus Capacitance          |            |            | 15         | pF           |

1. Measurement conditions are  $V_{IN} = 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , and clock frequency = 1 MHz.

**Table 5.4**  
**DC Characteristics**

| <b>Symbol</b> | <b>Parameter</b>                           | <b>Condition<sup>1</sup></b> | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Units</b> |
|---------------|--------------------------------------------|------------------------------|------------|------------|------------|--------------|
| VIL           | Low TTL Input Voltage                      |                              | -          | -          | 0.8        | V            |
| VIH           | High Input Voltage:<br>Commercial          |                              | 2.0        | -          | -          | V            |
| VT            | Switching Threshold                        |                              | -          | 1.5        | -          | V            |
| IIN           | Input Current:                             |                              |            |            |            |              |
|               | CMOS TTL                                   | VIN = VDD or VSS             | -10        | 0          | 10         | μA           |
|               | Pullup                                     | VIN = VSS                    | -60        | -105       | -190       | μA           |
|               | Pulldown                                   | VIN = VDD                    | 55         | 120        | 200        | μA           |
| VOL           | Low Output Voltage                         |                              | -          | 0.2        | 0.4        | V            |
| VOH           | High Output Voltage                        |                              | 2.4        | 4.5        | -          | V            |
| IOS           | Output Short-circuit Current: <sup>2</sup> |                              |            |            |            |              |
|               | High Output Voltage                        | VO = VDD                     | 30         | 70         | 120        | mA           |
|               | Low Output Voltage                         | VO = VSS                     | -30        | -60        | -120       | mA           |
| IDDQ          | Quiescent Supply Current                   | VIN = VDD or VSS             |            |            | 10         | mA           |
| IDD           | Operating Supply Current                   | SYSCLK @ 30 MHz              |            | 300        |            | mA           |

1. All DC characteristics are specified for VDD = 5V ± 5% over the specified temperature and voltage ranges.

2. Only one output should be shorted at a time. Duration of short circuit test must not exceed one second. Specified for Maximum VDD.

**Table 5.5**  
**Pin Description Summary**

| <b>Mnemonic</b>     | <b>Description</b>                             | <b>Input/Output</b>            | <b>Drive<br/>(mA)</b> | <b>Active</b> |
|---------------------|------------------------------------------------|--------------------------------|-----------------------|---------------|
| A[4:0]              | Address Bus                                    | Input w/Pullup                 |                       |               |
| $\overline{AS}$     | Address Strobe                                 | Input w/Pullup                 |                       | Low           |
| BA[8:0]             | Buffer Address                                 | Output w/Moderate Slew Rate    | 4                     |               |
| BD[3:0]             | Buffer Data                                    | 3-state Bidirectional w/Pullup | 4                     |               |
| BYPASS              | Decoder Bypass                                 | Input w/Pullup                 |                       |               |
| $\overline{CAS}$    | Column Address Strobe                          | Output w/Moderate Slew Rate    | 4                     | Low           |
| $\overline{CSLDS}$  | Chip Select and Lower Data Strobe              | Input w/Pullup                 |                       | Low           |
| $\overline{CSUDS}$  | Chip Select and Upper Data Strobe              | Input w/Pullup                 |                       | Low           |
| D[15:0]             | Data Bus                                       | 3-state Bidirectional w/Pullup | 4                     |               |
| DACLK               | DAC Output Clock                               | Output                         | 4                     |               |
| $\overline{DTACK}$  | Data Acknowledge                               | Output                         | 4                     | Low           |
| $\overline{ERROR}$  | Error Indication                               | Input w/Pullup                 |                       | Low           |
| $\overline{FALE}$   | FIFO Almost Empty Flag                         | Output                         | 4                     | Low           |
| $\overline{FALF}$   | FIFO Almost Full Flag                          | Output                         | 4                     | Low           |
| $\overline{FEMPTY}$ | FIFO Empty Flag                                | Output                         | 4                     | Low           |
| HDMUTE              | Hard Mute                                      | Input w/Pullup                 |                       | High          |
| INT/MOT             | Selects Controller Interface Mode              | Input w/Pulldown               |                       |               |
| $\overline{INTR}$   | System Interrupt/Error                         | Open-Drain Output              | 4                     | Low           |
| LRCLKI/<br>DVALID   | Left/Right Channel Indicator In/<br>Data Valid | Input w/Pullup                 |                       |               |
| LRCLKO              | Left/Right Channel Indicator Out               | Output                         | 4                     |               |
| $\overline{RAS}$    | Row Address Strobe                             | Output w/Moderate Slew Rate    | 4                     | Low           |
| READ                | Read                                           | Input w/Pullup                 |                       |               |
| RESET               | Reset                                          | Input w/Pullup                 |                       | High          |
| SCLKI               | Serial Clock In                                | Input w/Pullup                 |                       |               |
| SCLKO               | Serial Clock Out                               | Output                         | 4                     |               |
| SERI                | Serial Data In                                 | Input w/Pullup                 |                       |               |
| SERO                | Serial Data Out                                | Output                         | 4                     |               |
| SSEL                | Serial Select                                  | Input w/Pullup                 |                       |               |
| STARTI              | Start In                                       | Input w/Pullup                 |                       |               |
| STARTO              | Start Out                                      | Output                         | 4                     |               |
| SYSClk              | System Clock                                   | Input w/Pullup                 |                       |               |
| WCLKI               | Word Clock In                                  | Input w/Pullup                 |                       |               |
| WCLKO               | Word Clock Out                                 | Output                         | 4                     |               |
| $\overline{WE}$     | Write Enable                                   | Output w/Moderate Slew Rate    | 4                     | Low           |

## 5.2 AC Timing

This section presents AC timing information for the L64111. Table 5.6 lists the AC timing parameters for the timing waveforms shown in Figures 5.1 through 5.6. Note that the minimum clock cycle time is 33.33 ns. The maximum clock cycle time is  $1/(384f_s)$  ns, where  $f_s$  is the sampling frequency (32 KHz, 44.1 KHz, or 48 KHz).

All parameters in the timing tables apply for  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$ ,  $V_{DD} = 4.75$  to 5.25 volts.

Table 5.6  
AC Characteristics

| Parameter         | Description                                          | Min        | Max          | Units |
|-------------------|------------------------------------------------------|------------|--------------|-------|
| 1 $t_{DRASL}$     | Clock to $\overline{RAS}$ Low                        |            | 22           | ns    |
| 2 $t_{DRADD}$     | Clock to Row Address                                 |            | 20           | ns    |
| 3 $t_{DCADD}$     | Clock to Column Address                              |            | 20           | ns    |
| 4 $t_{DHD}$       | Write Data Hold                                      | 35         |              | ns    |
| 5 $t_D$           | Clock to Data                                        |            | 21           | ns    |
| 6 $t_{DCASH}$     | Clock to $\overline{CAS}$ High                       |            | 22           | ns    |
| 7 $t_{SUD}$       | Write Data Setup before $\overline{CAS}$ Low         | 12         |              | ns    |
| 8 $t_{DRASH}$     | Clock to $\overline{RAS}$ High                       |            | 17           | ns    |
| 9 $t_{DWE}$       | Clock to $\overline{WE}$ High                        |            | 21           | ns    |
| 10 $t_{DCASL}$    | Clock to $\overline{CAS}$ Low                        |            | 22           | ns    |
| 11 $t_{SUBDCASH}$ | BD Setup before SYSCLK High                          | 2          |              | ns    |
| 12 $t_{SURCS}$    | READ Setup before $\overline{CSXDS}$ Low             | 4          |              | ns    |
| 13 $t_{SUA}$      | A[4:0] Setup before $\overline{AS}$ Low              | 8          |              | ns    |
| 14 $t_{HLDA}$     | A[4:0] Hold after $\overline{AS}$ Low                | 0          |              | ns    |
| 15 $t_{DCSCTL}$   | $\overline{CSXDS}$ Low to $\overline{DTACK}$ Low     |            | $t_{CLK}+12$ | ns    |
| 16 $t_{HLDD}$     | Write Data Hold after $\overline{CSXDS}$ High or Low | 0          |              | ns    |
| 17 $t_{CYCLE}$    | Minimum $\overline{CSXDS}$ Width                     | $2t_{CLK}$ |              | ns    |
| 18 $t_{SUD}$      | Write Data Setup before $\overline{CSXDS}$ Low       | 8          |              | ns    |
| 19 $t_{HLDD}$     | READ Hold after $\overline{CSXDS}$ High (Write)      | 0          |              | ns    |
| 20 $t_{HLDRCS}$   | READ Hold after $\overline{CSXDS}$ High (Read)       | 0          |              | ns    |
| 21 $t_{WRREC}$    | Write Recovery time                                  | $2t_{CLK}$ |              | ns    |
| 22 $t_{DCSDTH}$   | $\overline{CSXDS}$ High to $\overline{DTACK}$ High   |            | $t_{CLK}+8$  | ns    |
| 23 $t_{DELZL}$    | $\overline{CSXDS}$ Low to Data Driven                | 5          | 20           | ns    |
| 24 $t_{DELD}$     | $\overline{CSXDS}$ Low to Data Valid                 |            | $t_{CLK}+20$ | ns    |
| 25 $t_{DELLZ}$    | $\overline{CSXDS}$ High to Data 3-state              | 5          | 20           | ns    |
| 26 $t_{SUD}$      | Write Data Setup before $\overline{CSXDS}$ High      | 8          |              | ns    |
| 27 $t_{SULR}$     | LRCLKI Setup before SCLKI High                       | 12         |              | ns    |
| 28 $t_{SUSERI}$   | SERI Setup before SCLKI High                         | 12         |              | ns    |


(Sheet 1 of 2)

Table 5.6 (Cont.)  
AC Characteristics


| Parameter          | Description                                       | Min               | Max | Units |
|--------------------|---------------------------------------------------|-------------------|-----|-------|
| 29 $t_{HLDSEI}$    | SERI Hold after SCLKI High                        | 0                 |     | ns    |
| 30 $t_{HLDLR}$     | LRCLKI Hold after SCLKI High                      | 0                 |     | ns    |
| 31 $t_{DLYBYPASS}$ | Delay from Input in BYPASS Mode                   |                   | 18  | ns    |
| 32 $t_{HLDW}$      | $\overline{AS}$ Hold after $\overline{CSXDS}$ Low | $2 \cdot t_{CLK}$ |     | ns    |
| 33 $t_{SUPCM}$     | SERO to SCLKO High                                | $5 \cdot t_{CLK}$ |     | ns    |
| 34 $t_{HLDPCM}$    | SCLKO High to SERO Change                         | $5 \cdot t_{CLK}$ |     | ns    |
| 35 $t_{DLYPCMCTL}$ | LRCLKO Change to SCLKO High                       | $5 \cdot t_{CLK}$ |     | ns    |
| 36 $t_{SUREAD}$    | READ Setup before $\overline{AS}$ Low             | 20                |     | ns    |

(Sheet 2 of 2)


Figure 5.1  
Channel Buffer  
Write Cycle

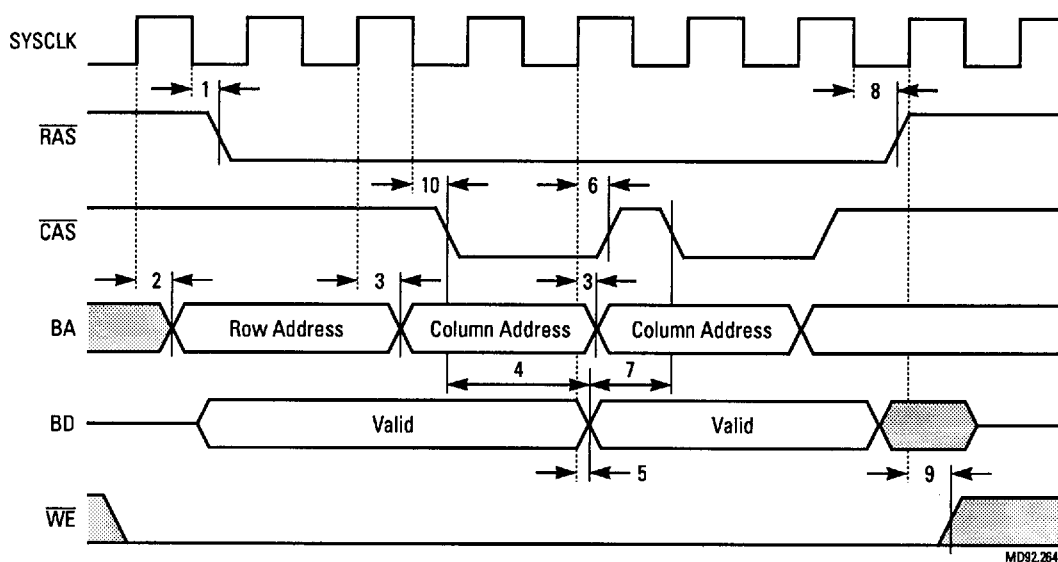


**Figure 5.2**  
**Channel Buffer Read**  
**Cycle**

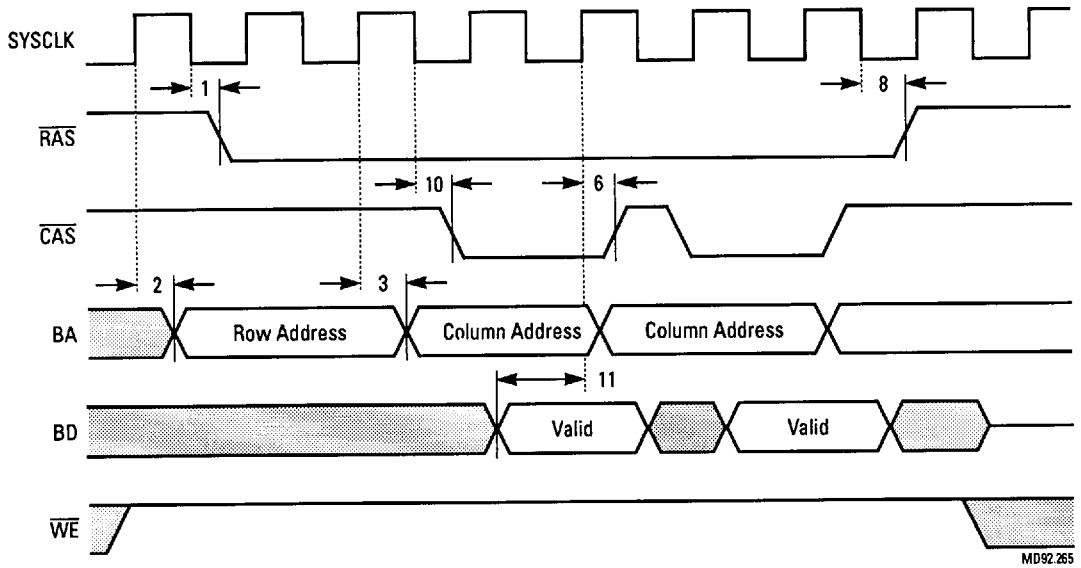


**Figure 5.3**  
**Controller Interface**  
**Write Cycle**

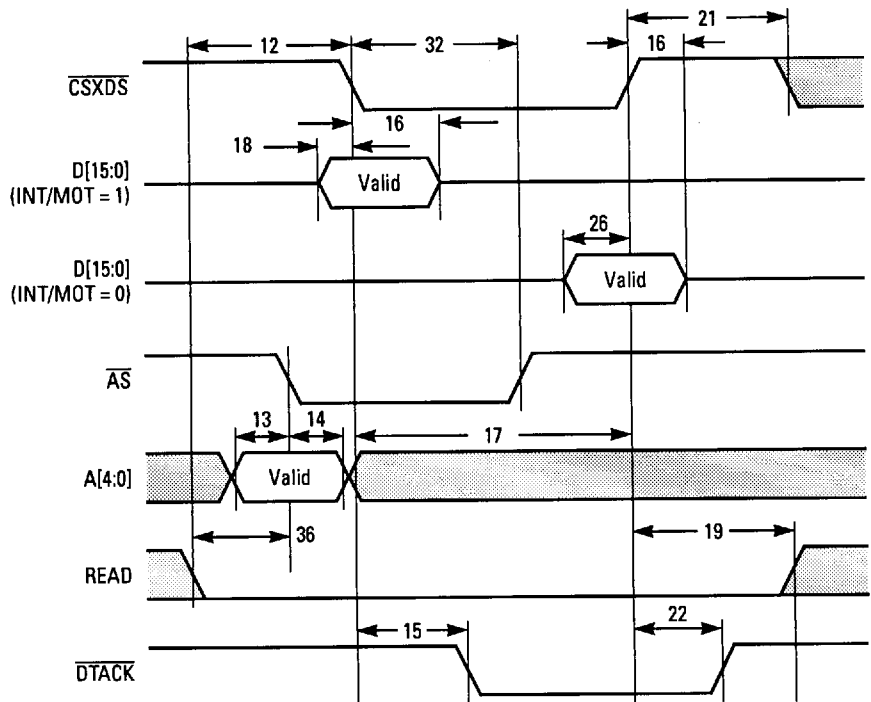


**Figure 5.4**  
Controller Interface  
Read Cycle

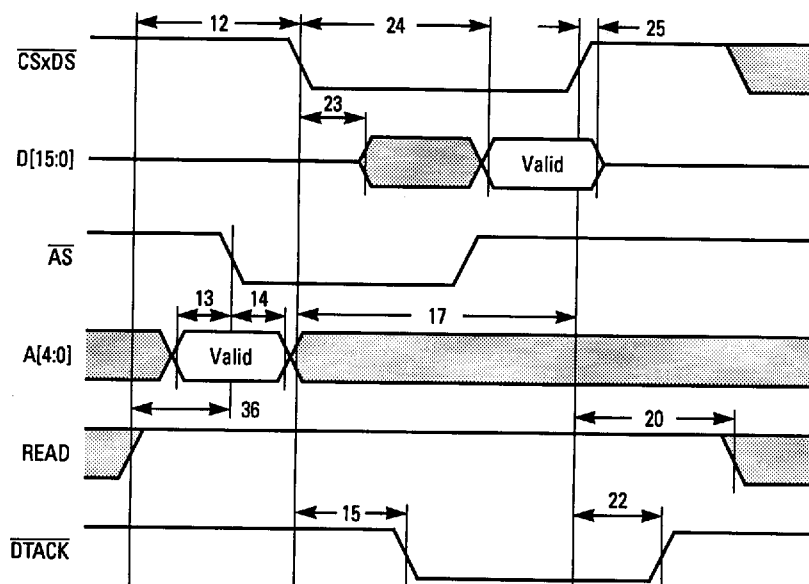

**Figure 5.5**  
Input Timing

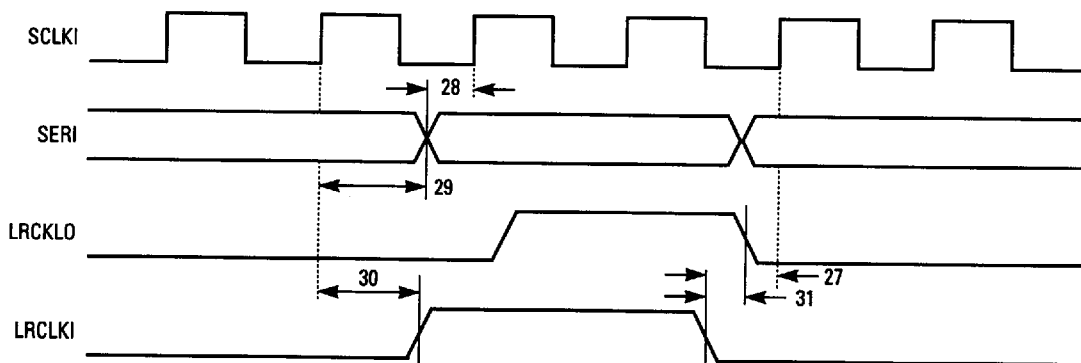

**Figure 5.6**  
Serial PCM Data Out  
Timing

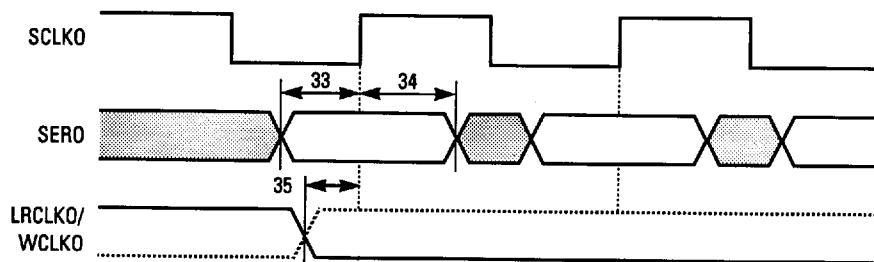

### 5.3 Pinouts

This section provides pinout tables for the L64111 package. The L64111 is available in a 100-pin plastic quad flat package (PQFP).

**Table 5.7**  
100-pin PQFP  
Pinout by Pin  
Number

| Pin<br>Number | Signal  | Pin<br>Number | Signal | Pin<br>Number | Signal | Pin<br>Number | Signal          |
|---------------|---------|---------------|--------|---------------|--------|---------------|-----------------|
| 1             | A2      | 26            | VDD    | 51            | SERO   | 76            | NC <sup>1</sup> |
| 2             | VDD     | 27            | NC     | 52            | VDD    | 77            | VDD             |
| 3             | VDD     | 28            | VDD    | 53            | VDD    | 78            | VDD             |
| 4             | VDD     | 29            | VDD    | 54            | VDD    | 79            | VDD             |
| 5             | INT/MOT | 30            | D7     | 55            | FEMPTY | 80            | BA8             |
| 6             | A1      | 31            | D6     | 56            | VSS    | 81            | BA7             |
| 7             | A0      | 32            | D5     | 57            | FALF   | 82            | BA6             |
| 8             | AS      | 33            | D4     | 58            | FALE   | 83            | BA5             |
| 9             | SSEL    | 34            | D3     | 59            | VSS    | 84            | BA4             |
| 10            | DACLK   | 35            | VSS    | 60            | RESET  | 85            | BA3             |
| 11            | READ    | 36            | D2     | 61            | HDMUTE | 86            | BA2             |
| 12            | CSUDS   | 37            | D1     | 62            | VDD    | 87            | BA1             |
| 13            | CSLDS   | 38            | D0     | 63            | VDD    | 88            | BA0             |
| 14            | VDD     | 39            | INTR   | 64            | SYSCLK | 89            | VDD             |
| 15            | VSS     | 40            | VSS    | 65            | VSS    | 90            | VSS             |
| 16            | NC      | 41            | VDD    | 66            | VSS    | 91            | VDD             |
| 17            | D15     | 42            | DTACK  | 67            | VDD    | 92            | CAS             |
| 18            | D14     | 43            | NC     | 68            | ERROR  | 93            | RAS             |
| 19            | D13     | 44            | VDD    | 69            | WCLKI  | 94            | WE              |
| 20            | D12     | 45            | VDD    | 70            | LRCLKI | 95            | BD3             |
| 21            | D11     | 46            | STARTO | 71            | SCLKI  | 96            | BD2             |
| 22            | D10     | 47            | STARTI | 72            | SERI   | 97            | BD1             |
| 23            | D9      | 48            | WCLKO  | 73            | BYPASS | 98            | BD0             |
| 24            | VSS     | 49            | LRCLKO | 74            | VDD    | 99            | A4              |
| 25            | D8      | 50            | SCLKO  | 75            | VSS    | 100           | A3              |

1. NC pins are not connected and are reserved.

**Table 5.8**  
100-pin PQFP  
Pinout by Pin Name


| Signal | Pin Number | Signal  | Pin Number | Signal | Pin Number | Signal          | Pin Number |
|--------|------------|---------|------------|--------|------------|-----------------|------------|
| A0     | 7          | D2      | 36         | RAS    | 93         | VDD             | 53         |
| A1     | 6          | D3      | 34         | READ   | 11         | VDD             | 54         |
| A2     | 1          | D4      | 33         | RESET  | 60         | VDD             | 62         |
| A3     | 100        | D5      | 32         | SCLKI  | 71         | VDD             | 63         |
| A4     | 99         | D6      | 31         | SCLKO  | 50         | VDD             | 67         |
| AS     | 8          | D7      | 30         | SERI   | 72         | VDD             | 74         |
| BA0    | 88         | D8      | 25         | SERO   | 51         | VDD             | 77         |
| BA1    | 87         | D9      | 23         | SSEL   | 9          | VDD             | 78         |
| BA2    | 86         | D10     | 22         | STARTI | 47         | VDD             | 79         |
| BA3    | 85         | D11     | 21         | STARTO | 46         | VDD             | 89         |
| BA4    | 84         | D12     | 20         | SYSCLK | 64         | VDD             | 91         |
| BA5    | 83         | D13     | 19         | WCLKI  | 69         | VSS             | 15         |
| BA6    | 82         | D14     | 18         | WCLKO  | 48         | VSS             | 24         |
| BA7    | 81         | D15     | 17         | WE     | 94         | VSS             | 35         |
| BA8    | 80         | DACLK   | 10         | VDD    | 2          | VSS             | 40         |
| BD0    | 98         | DTACK   | 42         | VDD    | 3          | VSS             | 56         |
| BD1    | 97         | ERROR   | 68         | VDD    | 4          | VSS             | 59         |
| BD2    | 96         | FALE    | 58         | VDD    | 14         | VSS             | 65         |
| BD3    | 95         | FALF    | 57         | VDD    | 26         | VSS             | 66         |
| BYPASS | 73         | FEMPTY  | 55         | VDD    | 28         | VSS             | 75         |
| CAS    | 92         | HDMUTE  | 61         | VDD    | 29         | VSS             | 90         |
| CSLDS  | 13         | INT/MOT | 5          | VDD    | 41         | NC <sup>1</sup> | 16         |
| CSUDS  | 12         | INTR    | 39         | VDD    | 44         | NC              | 27         |
| D0     | 38         | LRCLKI  | 70         | VDD    | 45         | NC              | 43         |
| D1     | 37         | LRCLKO  | 49         | VDD    | 52         | NC              | 76         |

1. NC pins are not connected and are reserved.

## 5.4 Mechanical Specifications

Figure 5.7 shows the mechanical dimensions for the L64111 100-pin PQFP package.

Figure 5.7  
100-pin PQFP  
Mechanical  
Dimensions

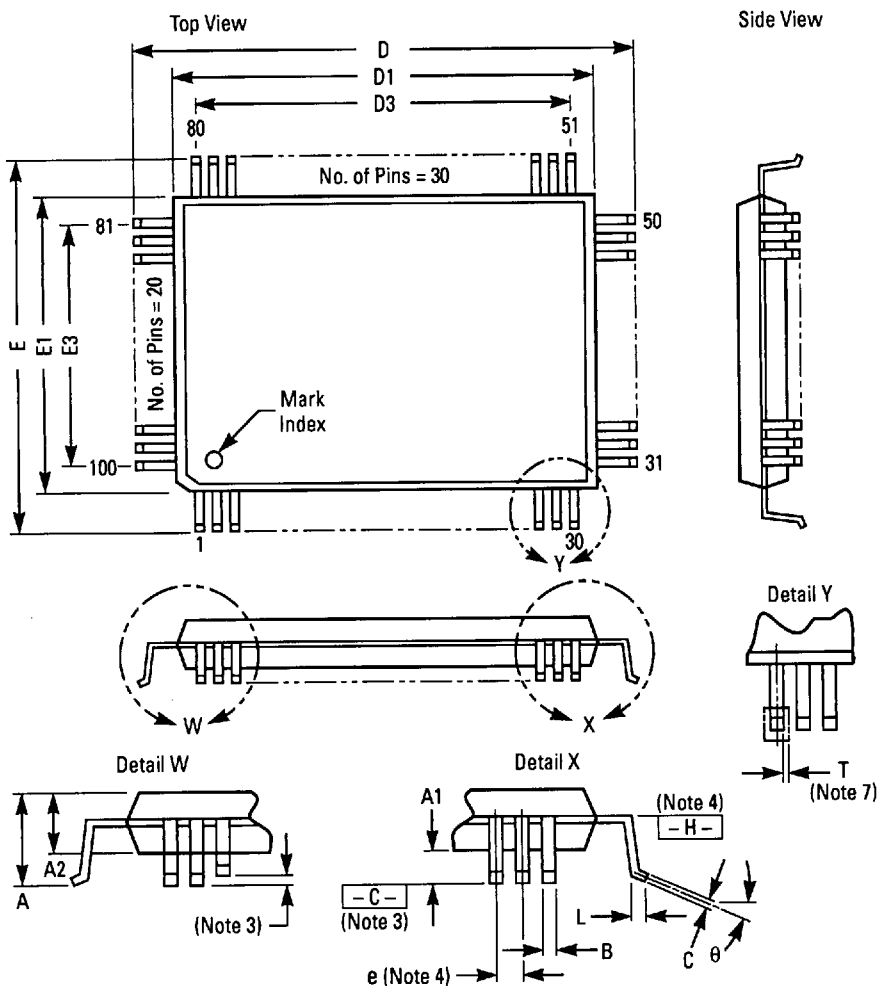

Note:

1. Total number of pins is 100.
2. Drawing is not to scale.
3. Coplanarity of all leads shall be within 0.10 mm (difference between the highest and lowest lead with seating plane - C - as reference).
4. Datum plane - H - is located at mold parting line and is coincident with the bottom of the lead, where the lead exits the plastic body. Lead pitch determined at - H -.
5. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. These dimensions to be determined at - H -.
6. Dimensions D3 and E3 to be centered relative to dimensions D1 and E1, respectively,  $\pm 0.200$  mm.
7. Tolerance window for lead skew from true position is determined at seating plane - C -.
8. For board layout and manufacturing, you may obtain engineering drawings from your LSI Logic Products marketing representative by requesting the outline drawing for package code PB.


| Dimension |     | mm    |
|-----------|-----|-------|
| A         | Max | 3.40  |
| A1        | Min | 0.25  |
|           | Max | 0.35  |
| A2        | Min | 2.55  |
|           | Nom | 2.80  |
|           | Max | 3.05  |
| B         | Min | 0.22  |
|           | Nom | 0.30  |
|           | Max | 0.38  |
| C         | Min | 0.12  |
|           | Max | 0.25  |
| D         | Min | 23.65 |
|           | Nom | 23.90 |
|           | Max | 24.15 |
| D1        | Min | 19.90 |
|           | Nom | 20.00 |
|           | Max | 20.10 |
| D3        | Ref | 18.85 |
| e         | BSC | 0.65  |
|           | Min | 17.65 |
|           | Nom | 17.90 |
|           | Max | 18.15 |
| E         | Min | 13.90 |
|           | Nom | 14.00 |
|           | Max | 14.10 |
| E1        | Min | 13.90 |
|           | Nom | 14.00 |
|           | Max | 14.10 |
| E3        | Ref | 12.35 |
|           | Min | 0.65  |
|           | Nom | 0.80  |
|           | Max | 0.95  |
| T         | Max | 0.10  |
| $\theta$  | Min | 0°    |
|           | Max | 7°    |

MO92.PB

## 5.5 Ordering Information

This section presents ordering information for the L64111 MPEG Audio Decoder. The part number uses the following format:

**L64111 Q C**

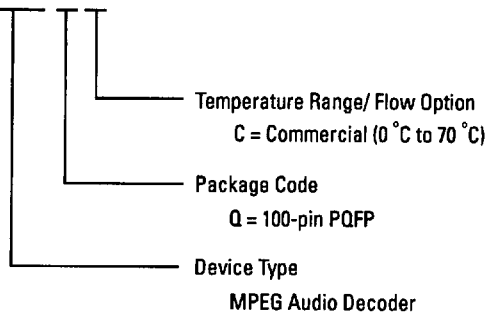

# Chapter 6

## Applications

---

This chapter discusses L64111 applications and design requirements. It covers use of the L64111 in stand-alone applications (without an external controller) and in applications where a separate controller is used. The L64111 can also support applications requiring video synchronization or cue and review functions, which require an external controller.

This chapter contains the following sections:


- Section 6.1, External Controller Operation
  - Section 6.2, Stand-alone Operation
  - Section 6.3, DAC Interfacing
  - Section 6.4, Audio/Video Application
- 

### 6.1 External Controller Operation

Applications requiring a system controller may use an 8- or 16-bit controller or a dedicated state machine. The L64111 Audio Decoder can accept input data in 8- or 16-bit parallel format through the Controller Interface data I/O pins. To ensure compatibility with eight-bit controllers, all control registers are eight bits wide and are always accessed through D[7:0]. The L64111 can be used with either 8- or 16-bit controllers but provides a higher data throughput with a 16-bit controller.

Figure 6.1 is an example of the L64111 with a 16-bit controller. An external controller is required for all operations which need non-default initialization of registers, reading of registers (for example the buffer status or the PTS), and interrupt handling.


Figure 6.1  
Application Using  
External Controller  
(Sheet 1 of 2)

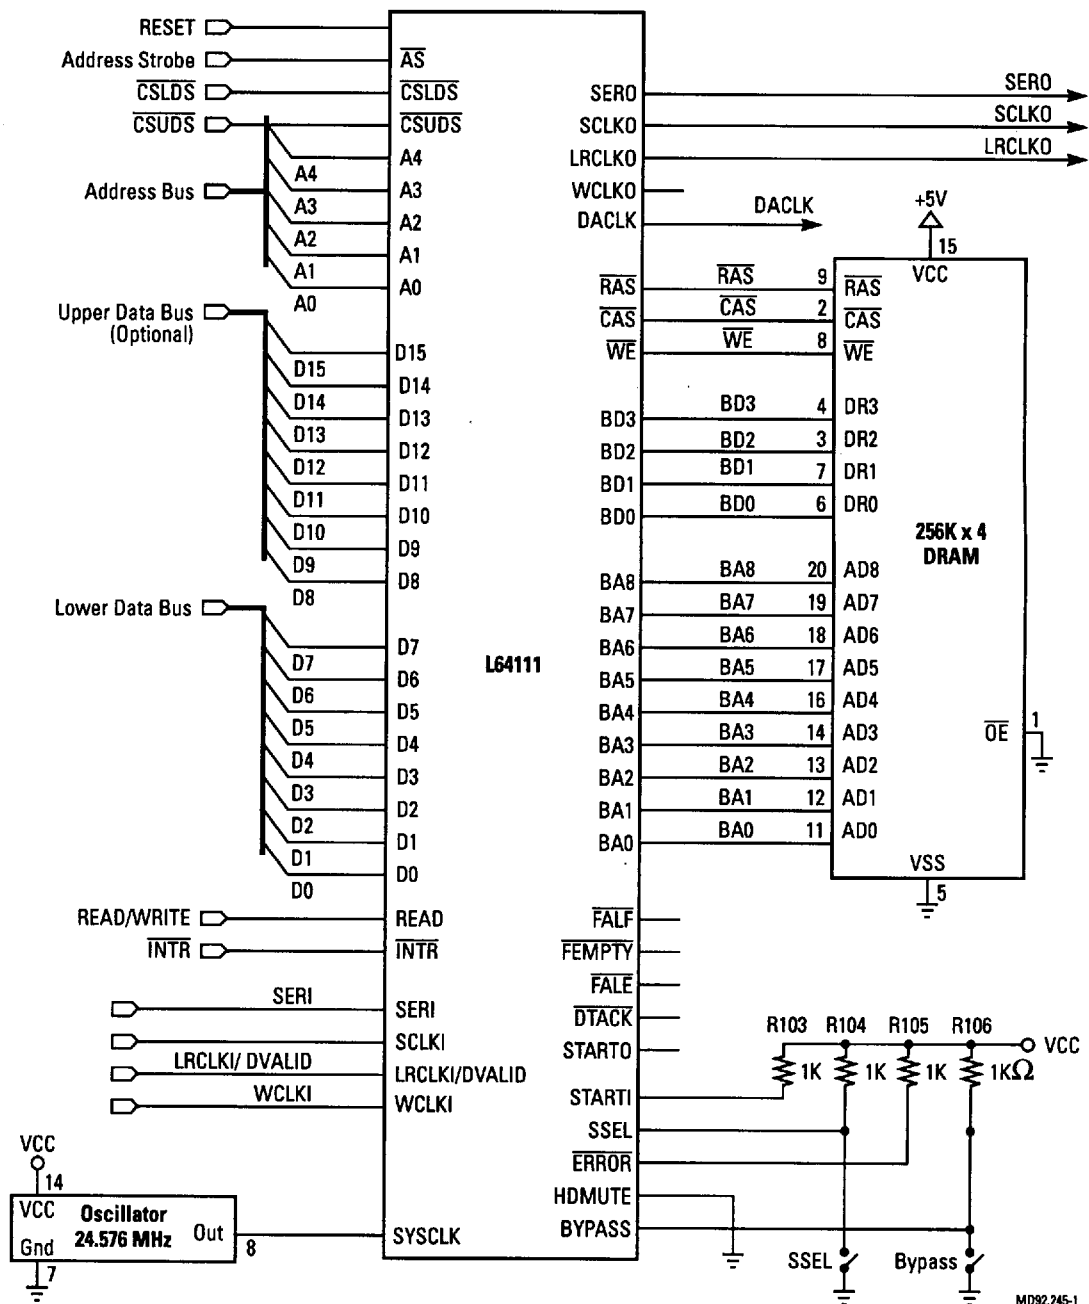

MD92.245-1

Figure 6.1  
Application Using  
External Controller  
(Sheet 2 of 2)

 = Analog Ground  
 = Digital Ground

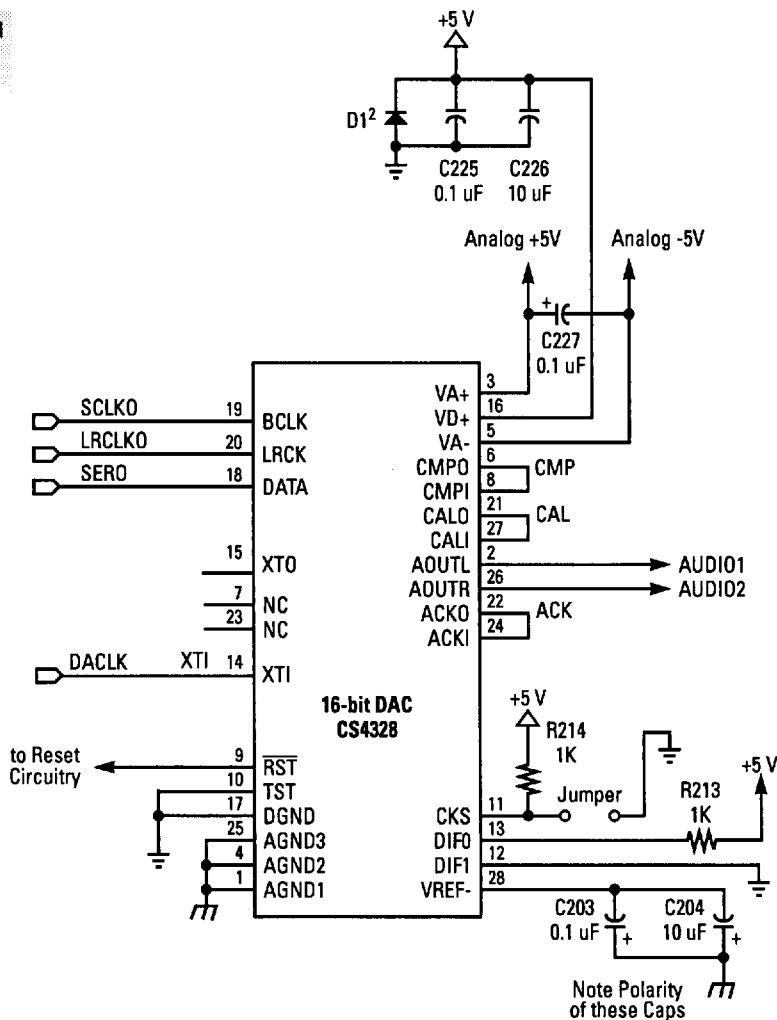


## 6.2 Stand-alone Operation

The L64111 is designed to support stand-alone operation. This section discusses the system architecture and the chip features that support this application. Figure 6.2 illustrates the design of a prototypical stand-alone decoder application. The main components are:

- L64111 MPEG Audio Decoder
- DRAM Channel Buffer
- PCM Digital to Analog Converter (DAC)

Not shown are auxiliary circuit components such as an oscillator, power supply, or passive components. The following sections discuss aspects of using this design.

Figure 6.2  
Stand-alone  
Operation

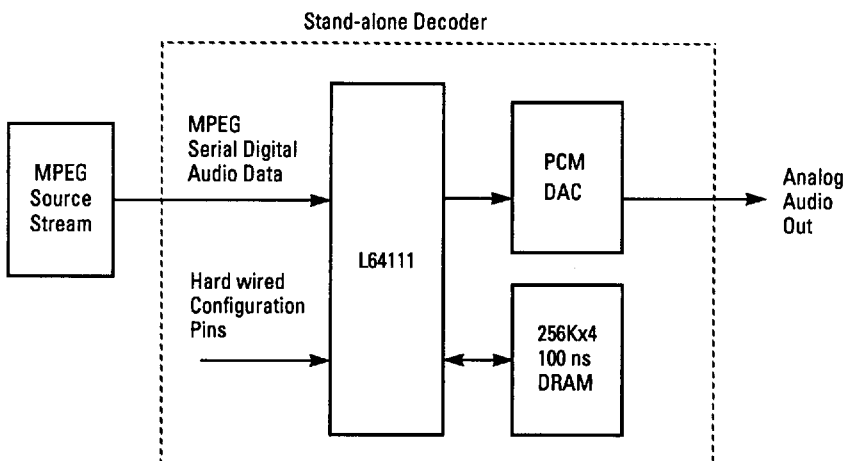

In stand-alone operation, the L64111's configuration and operating parameters may be selected via hard wired input pins or by utilizing the default values in its registers. The following discusses specific items.

### Stream Type Selection

In stand-alone applications, address line A4 may be hard wired to select whether L64111 functions as an ISO System Stream decoder or as an audio stream decoder. When A4 is high, the L64111 operates with audio streams only. When A4 is low, the L64111 operates with system streams only. For more information, see the description of the AUDIO ONLY field of Control Register 2 on page 4-7 and also Table 6.2 below. One of the two forms of decoding must be chosen.

## Setting Output Frequency

Registers TCR, TORH, and TORL must be loaded with a value that determines the output bit rate. A divisor is entered that is applied to the system clock. To enable these values to be set on the rising edge of RESET, the address lines and the data lines write directly into the TOR and TCR registers as shown in Table 6.1.

**Table 6.1**  
*Hardwiring Values  
Using Input Pins*

| <i>Input Pins</i> | <i>Name of Register<br/>Being Written to</i> | <i>Register Field/Bits</i>                                                              |
|-------------------|----------------------------------------------|-----------------------------------------------------------------------------------------|
| A4                | Control Register 2                           | AUDIO ONLY, bit 3;<br>0 = decode at system stream layer<br>1 = decode audio stream only |
| A[3:0]            | TCR                                          | TCR[3:0]                                                                                |
| D[15:8]           | TORH                                         | TOR[15:8]                                                                               |
| D[7:0]            | TORL                                         | TOR[7:0]                                                                                |

When the A and D lines in Table 6.1 are hardwired to the appropriate levels, the L64111 stores the configuration values when the RESET pin is asserted. Once these values are latched, the L64111 can function using its serial port for the data stream and it ignores the pins listed in Table 6.1. Note that if other register bits need to be changed from their default values stand-alone mode cannot be used.

## 6.3 DAC Interfacing

This section discusses the DAC to interface to the L64111. The L64111 is designed to interface to a wide variety of bit-serial DACs that are commonly used in consumer products such as audio CD and DAT players.

There are two basic families of audio DAC: baseband and oversampling DACs. Baseband DACs operate at the audio sample rate, typically 44.1 KHz. They vary in the conversion technique employed, but from the perspective of the L64111 are distinguished by the fact that the highest speed clock provided to them is the bit clock, SCLKO. Baseband DACs generally require a sophisticated analog filter on their output to remove images of the reconstructed signal at multiples of the sample frequency.

Oversampling DACs can simplify the implementation of the analog post filter by interpolating the signal digitally prior to conversion, and performing the conversion at a higher rate. This rate is typically eight times the sampling frequency,  $f_s$  (hence the term 8x oversampling), which causes the images of the reconstructed signal to appear centered about multiples of 8  $f_s$  instead of  $f_s$ . The images can now be easily removed with a simple ana-

log filter. From the perspective of the L64111, oversampling DACs are distinguished by the fact that they generally require a very accurate clock, which is typically 256 to 384 times the sample clock rate, in addition to the SCLKO signal.

The L64111 is able to synthesize a SCLKO signal over a wide frequency range by using an internal fractional counter, which allows the L64111 to provide different SCLKO clock rates from the same SYSCLK. In this manner, different output sample rates are supported from a single oscillator. Variable sample rates are very useful in a system that may transmit coded MPEG data at 32 KHz, 44.1 KHz, or 48 KHz. A fractional divider cannot be used with most oversampling DACs because there is usually a strict relationship between the SCLK frequency and the DAC operating frequency, which may not be met with a fractional divider. It is therefore recommended to use only an integer divisor to generate the SCLKO frequency when using oversampling DACs.

Table 6.2 shows recommended operating frequencies for the L64111 when used with oversampling DACs at different sampling rates. Note that a single clock can be used for 32 KHz and 48 KHz operation if the DAC can switch between  $256 f_s$  and  $384 f_s$  operation (which is fairly common).

**Table 6.2**  
**Recommended**  
**Operating Frequencies**  
**Using Oversampling**  
**DACs**

| <i>Sample Rate</i> | <i>256 f<sub>s</sub> Mode DACs</i> |                | <i>384 f<sub>s</sub> Mode DACs</i> |                 |
|--------------------|------------------------------------|----------------|------------------------------------|-----------------|
|                    | <i>Clock Frequency</i>             | <i>TCR reg</i> | <i>Clock Frequency</i>             | <i>TCR reg.</i> |
| 32 KHz             | 16.384 MHz                         | 8              | 24.576 MHz                         | 8               |
| 44.1 KHz           | 22.5792 MHz                        | 8              | 16.9344 MHz                        | 6               |
| 48 KHz             | 24.576 MHz                         | 8              | 18.432 MHz                         | 6               |

Another consideration must be made when selecting a DAC. In some systems there is no feedback possible between the encoder and the decoder regarding possible mismatch between the encoder clock and the decoder clock. This lack of feedback is true of most broadcast or narrow cast applications, or any application in which the L64111 is operating in stand-alone mode. The basic problem is that any clock mismatch accumulates over time, and ultimately results in the overflow or underflow of the channel buffer at the decoder. The clocks must be locked together to prevent this if a reliable system is to be built.

Lock can be achieved either by phase or frequency lock to the channel clock, or by using timestamps embedded in the bitstream to modulate an error term used to correct the local clock frequency. When using an over-

sampling DAC, it is necessary to modulate the oversampling clock to the DAC (and hence the L64111 SYSCLK) to correct the errors. This modulation can be achieved with a well designed VCO/PLL combination or, for best results, a VCXO. Note that this is only an issue for oversampling DACs in a broadcast system. Oversampling DACs in a locally sourced system, or baseband DACs in either system do not require an external PLL, because baseband DACs will work with fractional divisors in the TCR register for reasons described earlier.

### Calculating the Output Sample Rate

The output sampling rate of the L64111 is typically one of three frequencies: 32 KHz, 44.1 KHz, or 48 KHz. The actual bit rate of the PCM serial output data signal, SDATA, is selectable between 32, 48, and 64 times the output sampling rate. The data is presented MSB first with sign extension, allowing for compatibility with most bit serial DACs. The output sampling rate is provided on pin LRCLKO and its corresponding bit rate is provided on pin SCLKO (Serial Clock Out).

TCR, TORH, and TORL store a clock divisor value, which the L64111 uses to calculate the PCM Serial Output Clock rate (SCLKO). To use them, calculate the appropriate value for each register using the formula given here and then use these values to initialize the three registers. The computed values are dependent on the input SYSCLK frequency and the required Serial Output Clock rate (SCLKO).

First determine the SCLK rate required by the DAC. This may be either 32, 48 or 64 times the sampling frequency. Next determine the output sampling frequency, this will be either 32 KHz, 44.1 KHz or 48 KHz. Use these values in the formula to determine the values of TCR, TORH and TORL.

The four-bit value in the TCR register is used as a terminal count. The 16-bit value in the combination of the TORH and TORL registers is used as the correction fraction. To calculate what these values need to be, the clock rate (in SYSCLK units) is divided by the desired output sampling rate (LRCLKO). The integer portion is stored in the TCR and the fractional portion is stored in the TORH and TORL. During operation, corrections can be made to the values in TORH, TORL, or TCR to adjust the frequency of the output if using a baseband DAC.

### TCR Calculation

The equation for determining the value of TCR is shown in Equation 6.1.

**Equation 6.1**  
**TCR Calculation**

$$TCR = \text{INT} \left( \frac{\text{SYSCLK}}{2 \times \text{samplerate} \times \text{SCLKratio}} \right)$$

For example, let the input clock, SYSCLK, equal 28 MHz, the SCLK over-sampling ratio equal 32 and the required output sample rate equal 32 kHz. The value for TCR is then found in Equation 6.2.

**Equation 6.2**  
**TCR Example**

$$TCR = \text{INT} \left( \frac{28\text{MHz}}{2 \times 32\text{KHz} \times 32} \right) = \text{INT} (13.671875) = 13$$

The TCR value in binary ( $13 = 0xD = 1101_2$ ) is written to address  $A[4:0] = 00110_2$ .

### Timer Offset Registers (TORH and TORL) Fraction Value

The fraction value, TOR, is a 16-bit value formed from the 8-bit values in the TORH and TORL registers. The L64111 uses TOR to correct for the error in the TCR register. TORH contains the eight most significant bits of the fraction TOR, and TORL contains the eight least significant bits of TOR. The equation for determining the fraction is found in Equation 6.3.

**Equation 6.3**  
**TOR Calculation**

$$TOR = \text{fractional part of} \left( \frac{\text{SYSCLK}}{2 \times \text{samplerate} \times \text{SCLKratio}} \right)$$

Using the values from the TCR example given previously, the fractional part of TOR is given in Equation 6.4.

**Equation 6.4**  
**TOR Example**

$$TOR \text{ Fraction Value} = \text{Fract} \left( \frac{28\text{MHz}}{2 \times 32\text{KHz} \times 32} \right) = \text{Fract} (13.671875) = 0.671875$$

The value in the TOR register pair is stored as a binary fraction with 16 significant digits. When using a calculator, convert this fractional value to hexadecimal by multiplying the value by  $2^{16}$  and then converting to hex; the hexadecimal point will fall to the left of the most significant digit.

Calculating this value out in binary to 16 significant digits yields (in hex and binary) yields the result shown in Equation 6.5.

**Equation 6.5**  
**TOR Hex and Binary Values**

$$TOR \text{ Fraction Value} = 0.671875 = 0x0.(AC00) = 0.1010110000000000$$

Thus the value  $0xAC = 10101100_2$  should be stored in TORH and the value  $0x00 = 00000000_2$  should be stored in TORL.


This fractional value is added to an internal 16-bit register every time TCR counts down to zero. Each time this internal register exceeds one, a SYSCLK cycle delay is added to the transition of the output serial clock (SCLKO). On the next cycle the TOR value is added to the remaining fraction and the cycle continues. In this way the fractional corrections continue to be made to the output clock.

Note that a fractional value is not recommended if you are using an over-sampling DAC. In this case, choose an integer value for TCR (typically 8) and set TORL and TORH to zero. Then calculate the required SYSCLK. Note that for correct operation,  $TCR \geq 6$ .

### Setting the PCM Output Mode

The PCM data is always sign extended MSB first. The SCLK rate can be set by writing to the PCM MODE bits in Control Register 2. If you are using a DAC compatible with Philips I2S protocol, set the I2S bit in Control Register 2.


Figure 6.3  
PCM Output Modes

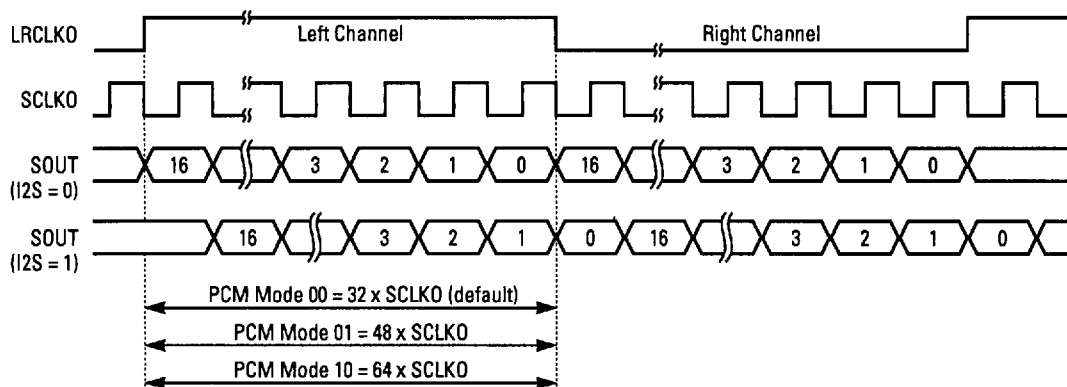

## 6.4 Audio/Video Application

*Figure 6.4  
Audio/Video  
Application  
Elements*

Figure 6.4 shows the L64111 in an audio/video decoding application. Factors relevant to this class of application are discussed in this section.

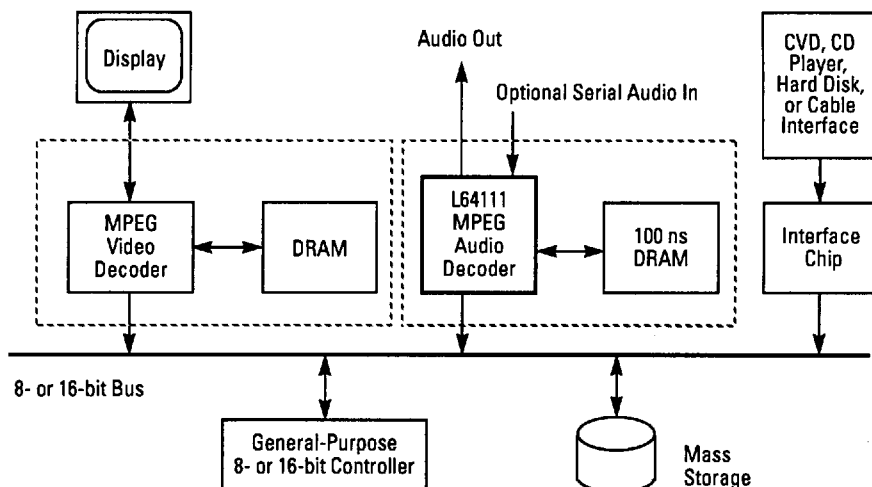

For applications including both audio and video, audio/video synchronization is achieved through the use of a system controller. The controller reads timestamp information from the audio and the video decoders and periodically issues a decode start command to the appropriate chip. The following section discusses the process.

### Synchronization Using Timecodes

Synchronization of audio and video elementary streams may be performed using the timecode information called the presentation time stamp (PTS) that may optionally be included in every MPEG packet.

When the L64111 recognizes an audio packet, it captures the PTS data and makes it available to be read in its PTS registers. A system controller may acquire this data and use it to synchronize audio and video.

The system controller must read the PTS from both an audio decoder and a video decoder. When the controller detects that the PTS for the audio coincides with the PTS for the video, the controller can send a STARTI signal to both devices (throughput delays must be accounted for).

The assertion of the STARTI signal ensures that the audio is synchronized to the video as long as both audio and video channel buffers are maintained

with enough data (though not allowed to overflow). The controller should occasionally monitor the PTS data so that the two decoders maintain synchronization in case the original sampling frequency and the output sampling frequency drift.

It is not necessary for the video PTS and audio PTS to exactly coincide on every check by the controller, especially because audio packets contain different sample sizes than the video packets

It is possible to advance or delay the audio decoder in two ways. If you are using a baseband DAC, the audio sample rate can be increased or decreased slightly by using the fractional part of the TCR register, which brings the chips back into sync at the cost of a very slight change in pitch. It is also possible to skip an audio frame, or play the same audio frame twice using the Cue and Review feature, explained on page 6-12. Using Cue and Review may produce audible artifacts if done too often. It is also possible to modify the frequency of operation using an external VCO or VCXO, which is the recommended solution in professional quality audio systems.

Note that although up to one second of audio data can be stored in the Channel Buffer, auditory changes are quite noticeable while visual changes may be less obvious. Video should be corrected in order to achieve synchronization with audio rather than audio to video.

---

#### Input Buffering Considerations

In applications using parallel data transfer to the L64111, the system controller must regulate its delivery of data to the decoder.

The system controller may monitor the status of the L64111's Input Data FIFO and regulate parallel data transfers to the buffer by means of three FIFO flags. The Input Data FIFO has three flags that allow the external controller to monitor its status: the FIFO Almost Full Flag ( $\overline{\text{FALF}}$ ), the FIFO Almost Empty Flag ( $\overline{\text{FALE}}$ ), and the FIFO Empty Flag ( $\overline{\text{FEMPTY}}$ ).

When  $\overline{\text{FALF}}$  goes LOW, the system controller must stop transferring data to the L64111, as the FIFO is almost full and an overflow may occur.

It is important that the channel buffer not underrun or overrun in normal operation because incorrect decoding could result. The most audible artifact is a clicking sound. Note that if the encoder is supplying data even marginally slower than the rate at which the decoder processes it, the buffer will eventually underrun, which results in the output being muted.

Once the buffer has underrun in this way, the decoder must be reset and the channel buffer allowed to fill to a satisfactory level before decoding begins again. If the encoder is supplying data even marginally faster than the decoder processes it, the buffer will overrun, which produces a click, and the decoder continues to play. In systems with a local source of encoded data it is easy to prevent channel overrun or underrun by examining the channel buffer status register, then reducing or increasing the data transfer rate. In systems with a remote encoder with no feedback to it, the situation is more complex. Refer to Section 6.3, "DAC Interfacing," for more details.

---

#### Cue and Review

Timestamp information that is part of an audio packet is stored in the Presentation Time Stamp registers. The data in the PTS registers can be used for fast forwarding, cueing, or reviewing.

The L64111 supports Cue and Review control by allowing the system controller to read and write the Channel Buffer's read and write pointers. A complex scheme of cue and review can be implemented by writing new values to the read and write pointers as needed.

The number of frames stored by the Channel Buffer depends on the type of Layer being decoded. The number of frames for Layer I is 128 and the number of frames for Layer II is 64. Note that the L64111 will always play each frame of data in the forward direction, even if the read pointer is being moved backwards through the channel buffer. It is only possible to reorder the frames, not the data within the frames.

## **Appendix A**

### **Customer Feedback**

---

We would appreciate your feedback on this document. Please copy the following page, add your comments, and fax it to us at:

LSI Logic Corporation  
Microprocessor Publications  
M/S G-812  
Fax 408.433.8989

If appropriate, please also fax copies of any marked-up pages from this document.

**IMPORTANT:** Please include your name, phone number, FAX number, and company address so that we may contact you directly for clarification or additional information. Thank you for your help in improving the quality of our documents.