

International **IR** Rectifier

30CPQ035
30CPQ040
30CPQ045

SCHOTTKY RECTIFIER

30 Amp


Major Ratings and Characteristics

Characteristics	30CPQ...	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM}	35/40/45	V
I_{FSM} @ tp = 5 μ s sine	1020	A
V_F @ 15Apk, $T_J = 125^\circ C$ (per leg)	0.50	V
T_J	-55 to 150	°C

Description/Features

The 30CPQ... center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_j operation
 - Center tap TO-247 package
 - High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
 - Very low forward voltage drop
 - High frequency operation
 - Guard ring for enhanced ruggedness and long term reliability

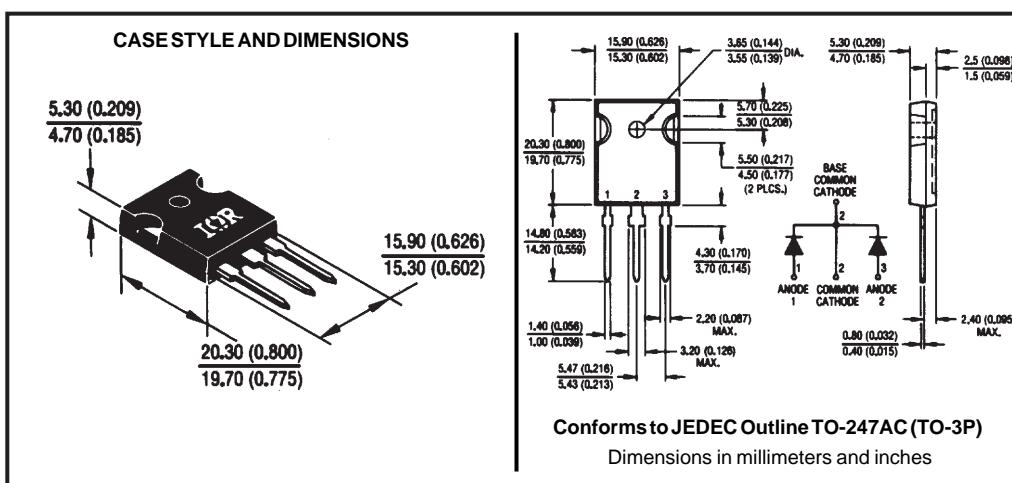

Voltage Ratings

Part number	30CPQ035	30CPQ040	30CPQ045
V_R Max. DC Reverse Voltage (V)	35	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	30CPQ...	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	30	A	50% duty cycle @ $T_J = 124^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1020	A	5μs Sine or 3μs Rect. pulse
	265		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3$ Amps, $L = 4.4$ mH
I_{AR} Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	30CPQ...	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.54	V	@ 15A
	0.68	V	@ 30A
	0.50	V	@ 15A
	0.64	V	@ 30A
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.75	mA	$T_J = 25^\circ\text{C}$
	70	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)	900	pF	$V_R = 5V_{DC}$; (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	30CPQ...	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	°C	
T_{stg} Max. Storage Temperature Range	-55 to 150	°C	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	2.20	°C/W	DCoeration * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	1.10	°C/W	DCoeration
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.24	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	6(0.21)	g(oz.)	
T Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)
	Max.	12(10)	Non-lubricated threads
Case Style	TO-247AC(TO-3P)		JEDEC

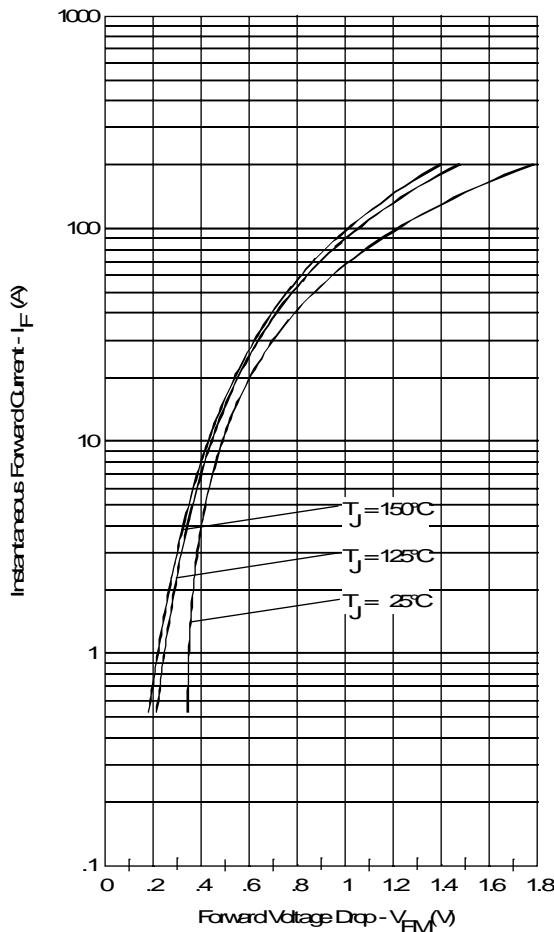


Fig. 1-Max. Forward Voltage Drop Characteristics
 (PerLeg)

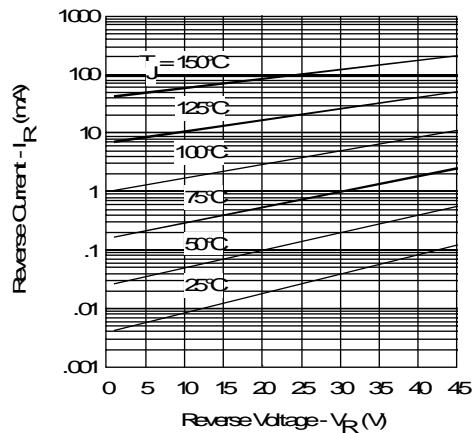


Fig. 2-Typical Values Of Reverse Current
 Vs. Reverse Voltage (PerLeg)

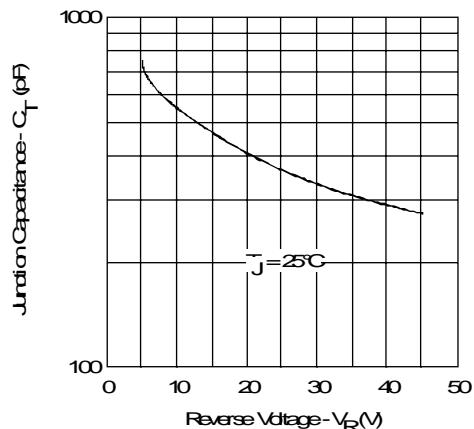


Fig. 3-Typical Junction Capacitance
 Vs. Reverse Voltage (PerLeg)

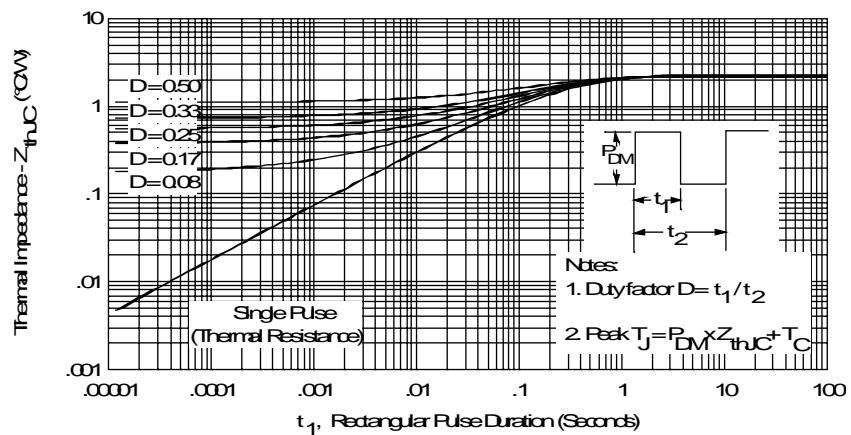


Fig. 4-Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

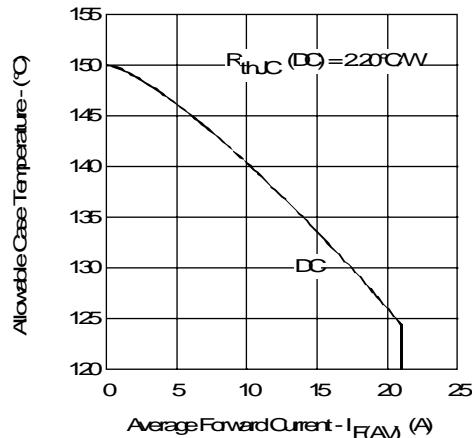


Fig.5-Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

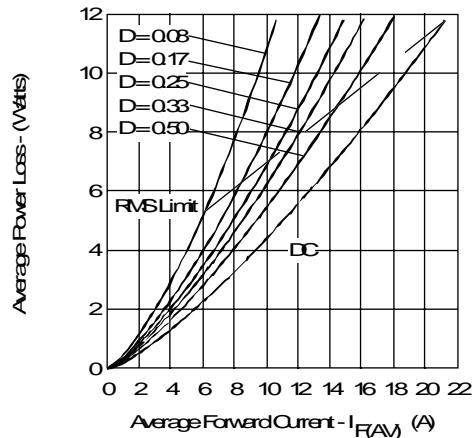


Fig.6-Forward Power Loss Characteristics (Per Leg)

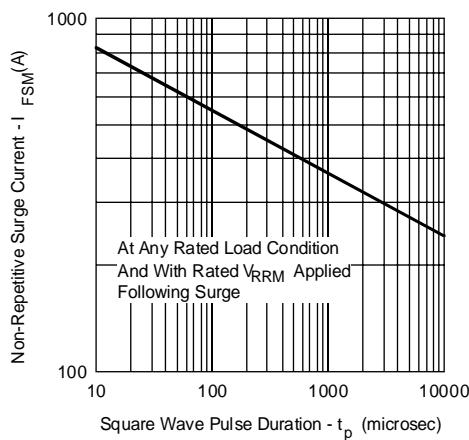


Fig.7-Max. Non-Repetitive Surge Current (Per Leg)

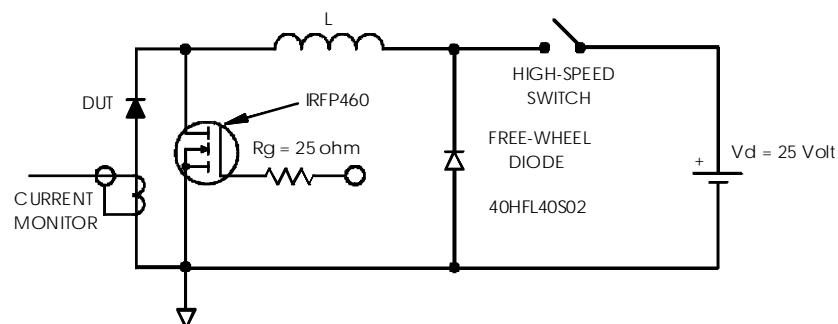


Fig.8-Unclamped Inductive Test Circuit