



Features

- Surface Mount
- 1:1 Impedance
- 260°C Reflow Compatible
- RoHS Compliant

Description

MABACT0039 is a low cost SMT 1:1 Transmission Line Transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications. Suitable for use in 50 Ohm and 75 Ohm systems.

Functional Schematic

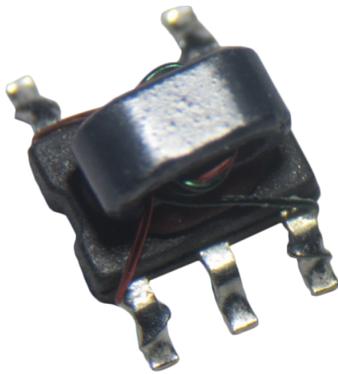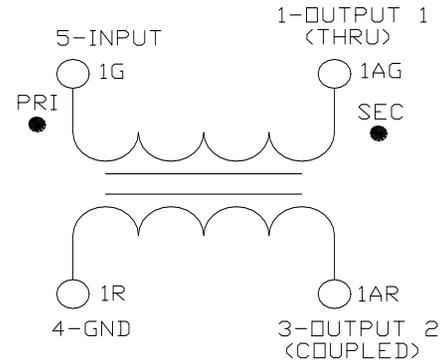

Pin Configuration³

Pin No.	Function
1	Secondary Dot (Output 1)
2	Not Used
3	Secondary (Output 2)
4	Primary (Ground)
5	Primary Dot (Input)

Ordering Information

Part Number	Package
MABACT0039	2000 piece reel

1:1 Transmission Line Transformer 5-3000MHz

Rev. V3

Electrical Specifications: Freq. = ___ MHz, $T_A = +25^\circ\text{C}$, $V_{CC} = ___ \text{V}$, $Z_0 = 50 \Omega$


Parameter	Frequency	Units	Min.	Typ.	Max.
Insertion Loss	50 - 2150 MHz	dB	-	1.0	2.0
	5 - 3000 MHz	dB	-	1.5	3.5
Amplitude Balance	50 - 2150 MHz	dB	-	1.0	± 2.2
Phase Balance	50 - 2150 MHz	$^\circ$	-	5.0	± 13.0
Input Return Loss	5 - 550 MHz	dB	20	30	-
	550 - 2100 MHz	dB	8	15	-

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC current	30mA
Operating Temperature	-40°C to $+85^\circ\text{C}$
Storage Temperature	-40°C to $+85^\circ\text{C}$

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

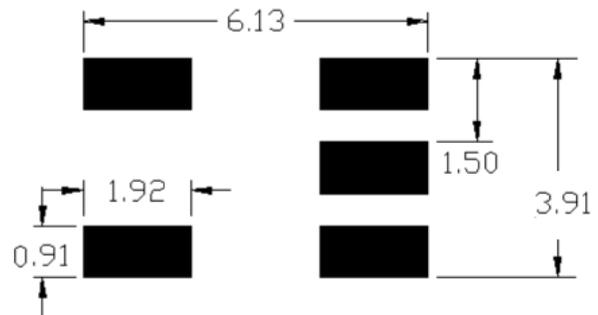


SUGGEST SOLDER FOOTPRINT


Dimensions in mm

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Insertion Loss 1 Pin5-Pin1 (through)

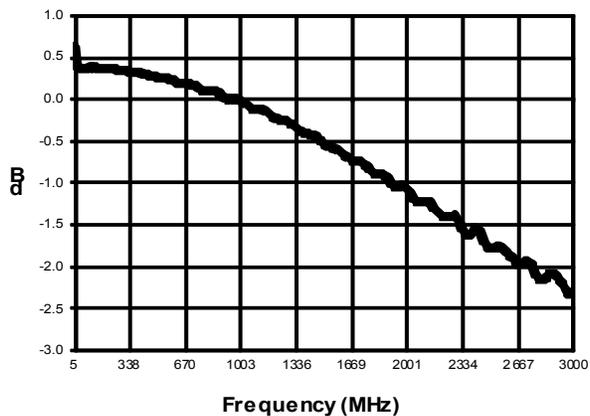


Insertion Loss 2 Pin5-Pin3 (coupled)

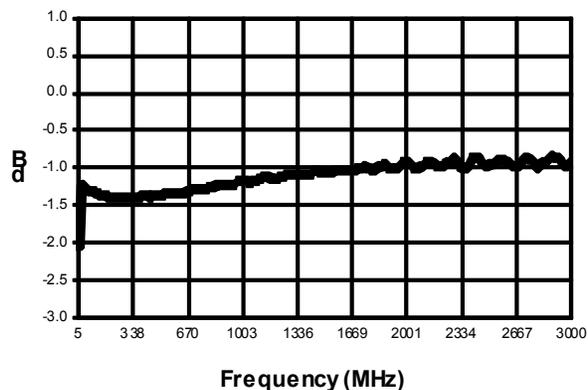


Amplitude Balance

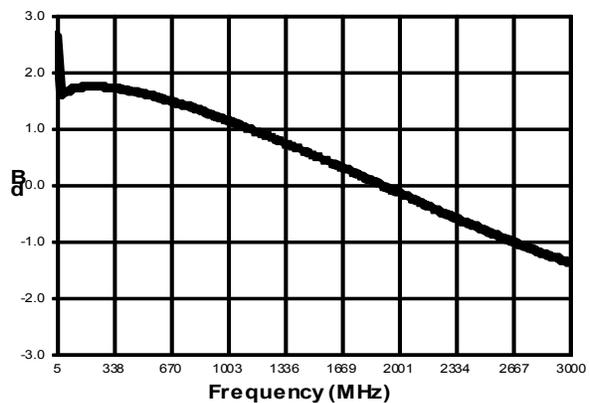

Phase Balance

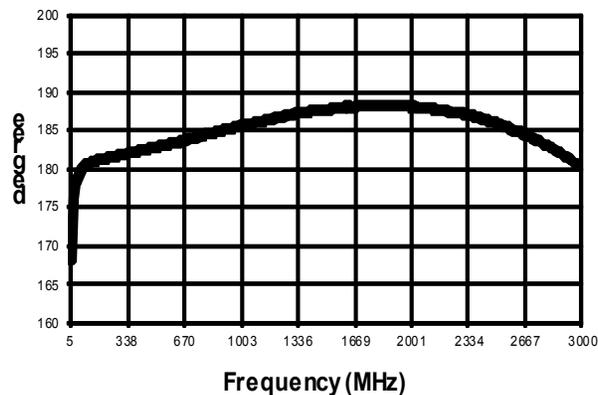

Part Orientation, F26.

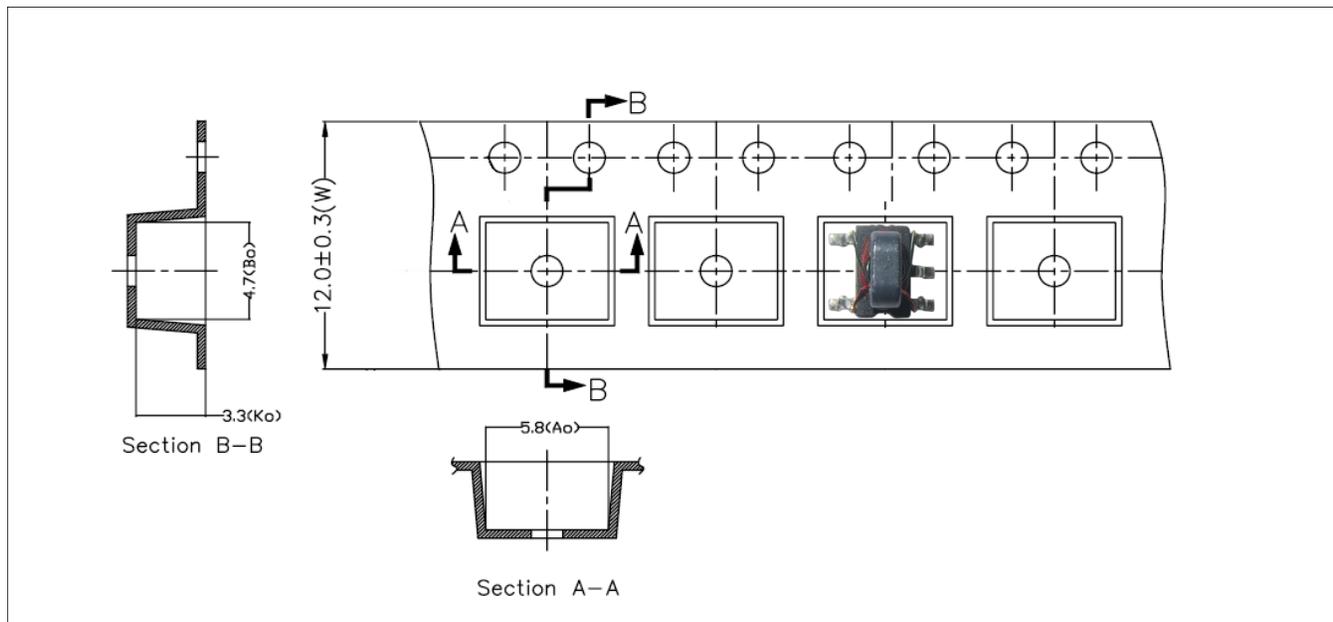

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.