EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

Features

- [·] P-LCC-2 package.
- ' White package.
- ' Optical indicator.
- ' Colorless clear window.
- ' Wide viewing angle.
- [•] Suitable for vapor-phase reflow, Infrared reflow
- and wave solder processes.
- [•] Computable with automatic placement equipment.
- ' Available on tape and reel (8mm Tape).

· Pb-free.

[•] The product itself will remain within RoHS compliant version.

Descriptions

The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- ⁺ Flat backlight for LCD, switch and symbol.
- Light pipe application.
- ' General use.

Device Selection Guide

Chip			
Material	Emitted Color	Resin Color	
AlGaInP	Brilliant Yellow Green	Water Clear	



7±0.


CATHODE

Technical Data Sheet


Top View LEDs


67-21/G6C-FN2P2B/2T

Package Dimensions 3.1±0.2 Ø2.4





Polarity

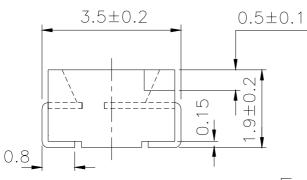



For reflow soldering (Proposal)

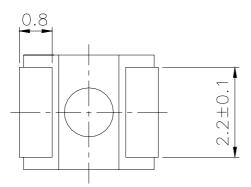

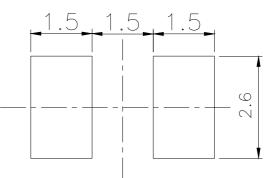

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. :DES-671-607 http://www.everlight.com Prepared date:06-Oct-2007 Rev.1 Page: 2 of 10 Prepared by: Teresa

Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	40	mA
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	80	mA
Power Dissipation	Pd	100	mW
Electrostatic Discharge (HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	Reflow Soldering : 260 Hand Soldering : 350	for 10 sec. for 3 sec.

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	36.0		72.0	mcd	I _F =20mA
Viewing Angle	201/2		120		deg	I _F =20mA
Peak Wavelength	λp		575		nm	I _F =20mA
Dominant Wavelength	λd	570		574.5	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	I _F =20mA
Forward Voltage	\mathbf{V}_{F}	1.75		2.35	V	I _F =20mA
Reverse Current	I _R			10	μΑ	V _R =5V

Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

Bin Range of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
	CC2	570.0	571.5		
F	CC3	571.5	573.0	nm	I _F =20mA
	CC4	573.0	574.5		

Bin Range of Luminous Intensity

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	57.0	mcd	I _F =20mA
P2	57.0	72.0		

Bin Range of Forward Voltage

Groups	Bin	Min	Max	Unit	Condition	
	0	1.75	1.95			
В	1	1.95	2.15	V	I _F =20mA	
	2	2.15	2.35			

Notes:

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength: ±1nm


3.Tolerance of Forward Voltage: ±0.1V


Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

Typical Electro-Optical Characteristics Curves

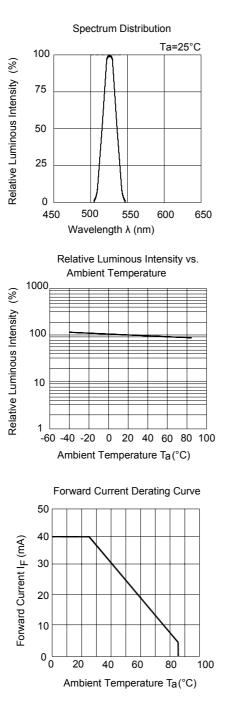

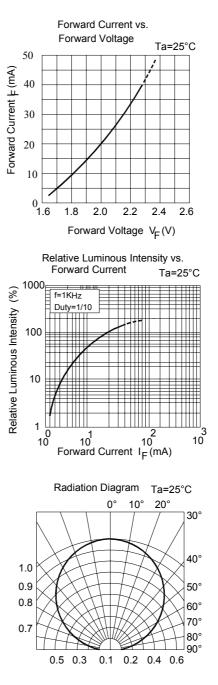


Technical Data Sheet

Top View LEDs


Label Explanation

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank

67-21/G6C-FN2P2B/2T

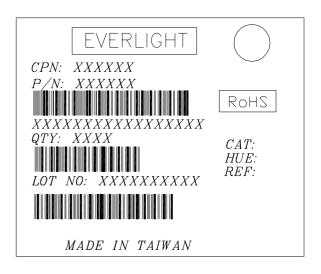

Reel Dimensions

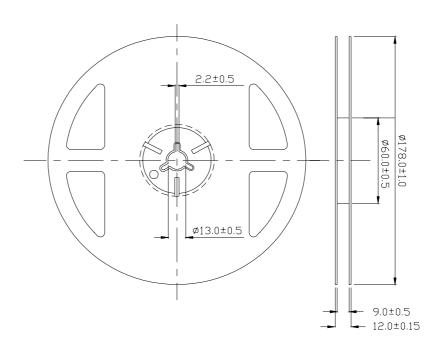

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm


http://www.everlight.com Prepared date:06-Oct-2007

Technical Data Sheet

Top View LEDs


67-21/G6C-FN2P2B/2T

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

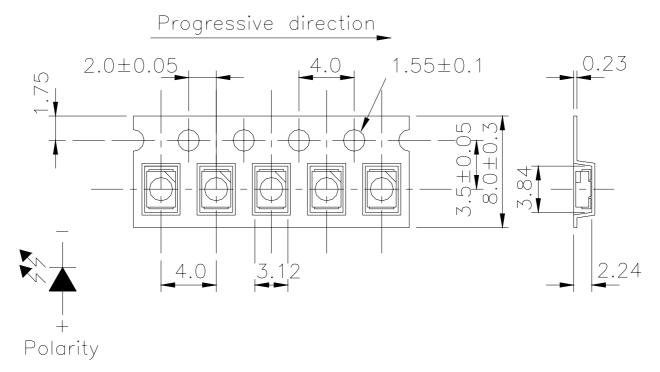

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

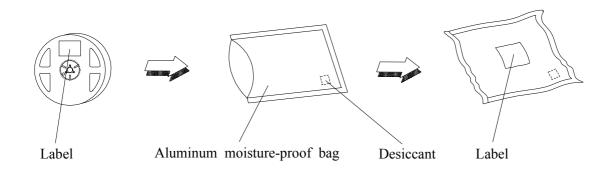



Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min ∫ 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min $\int 10 \sec L$ L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Technical Data Sheet

Top View LEDs


67-21/G6C-FN2P2B/2T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60 ± 5 for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

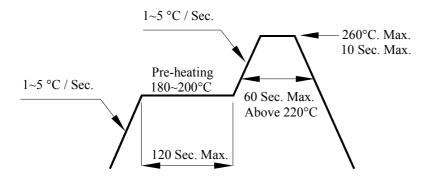

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Technical Data Sheet

Top View LEDs

67-21/G6C-FN2P2B/2T

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

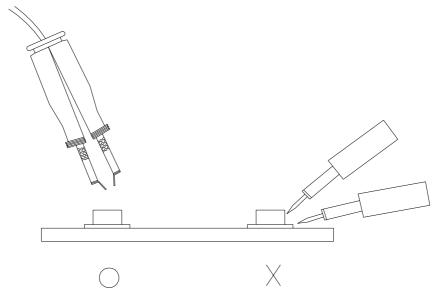

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

http://www.everlight.com Prepared date:06-Oct-2007