

# **MIL-STD-1553 TRANSCEIVER**

## **DESCRIPTION**

The BUS-1553 Transceiver is a complete transmitter and receiver which fully conforming to MIL-STD-1553A and 1553B. Features of this high reliability transceiver include: Harris 15530 type Encoder/Decoder direct interface compatibility, ±15 V or +15 and -12 V power supply requirements, and an internal (factory pre-set) threshold level.

The block diagram, FIGURE 1, illustrates the BUS-8553 Transceiver. The receiver section accepts phase-modulated bipolar data from a MIL-STD-553 Data Bus and produces TTL signal data at outputs: RX Data Out and RX Data Out. These outputs represent positive and negative excursions of the input bus signals beyond a preset threshold level. The receiver can be taken off-line (outputs disabled) by applying a logic "0" to the RECEIVER STROBE input.


The transmitter section accepts bipolar TTL signal data at its TX Data and TX  $\overline{Data}$  input lines and produces a 28 V pk-pk differential signal across a 140  $\Omega$  load that is coupled through a transformer to the TX Data and TX  $\overline{Data}$  outputs. An external TX INHIBIT, when activated with a logic "1" will take the transmitter off-line and ignore the data inputs

#### **APPLICATION**

The BUS-8553s small size, low power dissipation, and direct interface compatibility with Harris 15530 type Encoder/Decoder makes it an excellent choice for any MIL-STD-1553A or 1553B transceiver application. The BUS-8553 comes in a hermetic 24-pin DDIP package that measures 1.4 x 0.8 x 0.2 inches.


### **FEATURES**

- Meets All MIL-STD-1553A and 1553B Requirements
- Very Low Power Dissipation
- Improved Receiver Filtering Enhances System Bit Error Rate
- HARRIS 15530 Encoder/Decoder Direct Interface Compatibility
- Screened to MIL-PRF-38534
- Power Supplies: ±15 V or +15 V and -12 V

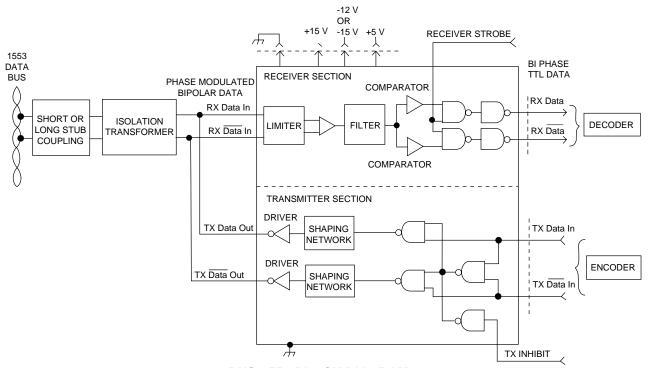


**BUS-8553-BLOCK DIAGRAM** 

TABLE 3. BUS-8553 PIN FUNCTION TABLE 24-PIN DDIP	
PIN	FUNCTION
1	TX Data Out
2	TX Data Out
3	Gnd
4	N.C.
5	N.C.
6	N.C.
7	RX Data Out
8	Strobe
9	Gnd
10	RX Data Out
11	N.C.
12	N.C
13	+15V DC
14	N.C.
15	RX <u>Data</u> In
16	RX Data In
17	N.C.
18	Gnd
19	-12V or -15V DC
20	+5V DC
21	TX Inhibit
22	TX Data In
23	TX Data In
24	N.C.

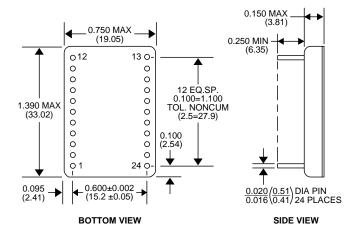

**BUS-8553 MECHANICAL OUTLINE** 

#### **ORDERING INFORMATION**

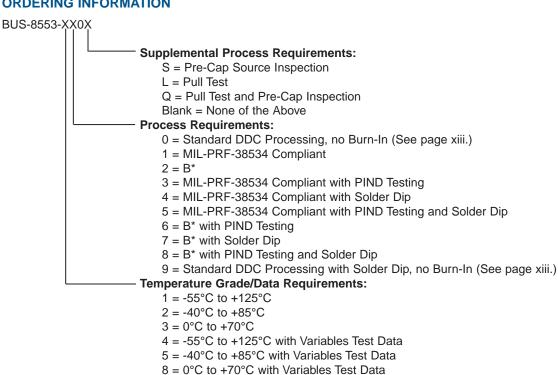

NOTE: Mating Transformer is BUS-25679

# **NOTES**

The information in this data sheet is believed to be accurate; however, no responsibility is assumed by Data Device Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith.

Specifications are subject to change without notice.



105 Wilbur Place, Bohemia, New York 11716-2482

For Technical Support - 1-800-DDC-5757 ext. 7257 or 7381

Headquarters - Tel: (631) 567-5600 ext. 7257 or 7381, Fax: (631) 567-7358

Southeast - Tel: (703) 450-7900, Fax: (703) 450-6610 West Coast - Tel: (714) 895-9777, Fax: (714) 895-4988 Europe - Tel: +44-(0)1635-811140, Fax: +44-(0)1635-32264 Asia/Pacific - Tel: +81-(0)3-3814-7688, Fax: +81-(0)3-3814-7689

World Wide Web - http://www.ddc-web.com

