

XB15A709



PIN DIODE

- ◆ High Power Handling
- ◆ Small Capacitance at Zero Bias, Extremely Small Reverse Bias
- ◆ Small Series Order Resistance
- ◆ Small Insertion Loss, High Isolation
- ◆ Surface Mount Type (for reflow assembly)

Applications


- High Power Antenna Switch
(10W output two-way radio)

General Description


The XB15A709A0HR PIN diode is designed for solid state antenna switching applications in mobile radios.

The XB15A709A0HR employs a square outline which makes it suitable for reflow assembly on surface mounting.

Dimensions

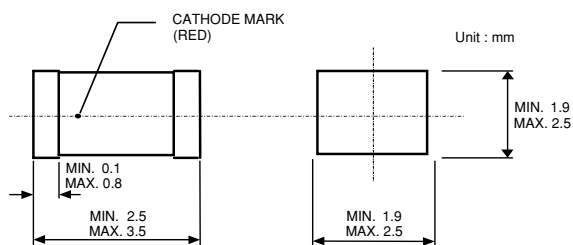

POWER DISSIPATION TEST BOARD

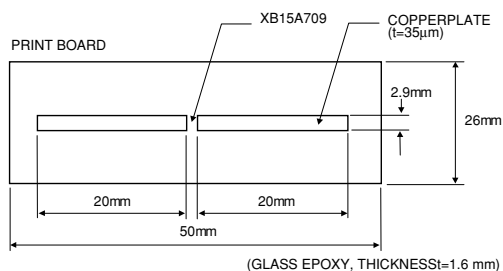

Absolute Maximum Ratings

SYMBOL	PARAMETER	RATINGS	UNITS
VR	Reverse Voltage	50	V
P	Power Dissipation (surface contact)*	1 *Glass Epoxy, t=1.6mm	W
Tj	Junction Temperature	175	°C
Tstg	Storage Temperature	-55 ~ 175	°C

Ta=25 °C

Electrical Characteristics

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
IR	Reverse Current	VR = 50V			10	µA
VF	Forward Voltage	IF = 50mA			1.0	V
Ct	Diode Capacitance	VR = 40V, f = 1MHz			1.2	pF
rfs	Forward Series Resistance	IF = 50mA, f = 100MHz		0.5	0.75	Ω
RP	Parallel Resistance	VR = 0V, f = 100MHz	1.0	3.0		kΩ

Ta=25 °C