

# GS78LXX

## 3-Terminal Positive Voltage Regulator

DEC. 2009

### Product Description

The GS78Lxx Series of positive voltage regulators are inexpensive, easy-to-use devices suitable for a multitude of applications that require a regulated supply of up to 100mA. Like their higher-powered GS78xx Series cousins, these regulators feature internal current limiting and thermal shutdown making them remarkably rugged. No external components are required with the GS78Lxx devices in many applications.

These devices offer a substantial performance advantage over the traditional zener diode-resistor combination, as output impedance and quiescent current are substantially reduced.


### Features

- Wide Range of Available, Fixed Output Voltages
- Internal Short Circuit Current Limiting
- Internal Thermal Overload Protection
- No External Components Required
- Complementary Negative Regulators Offered (GS79Lxx Series)
- Available in  $\pm 5\%$  Accuracy
- RoHS and Halogen Free Compliant and 100% Lead(Pb)-Free

### Applications

- Battery Powered Systems
- Portable Consumer Equipment
- Portable Computer
- Radio Control Systems
- Logic Systems
- Power Adapter


### Representative Schematic Diagram

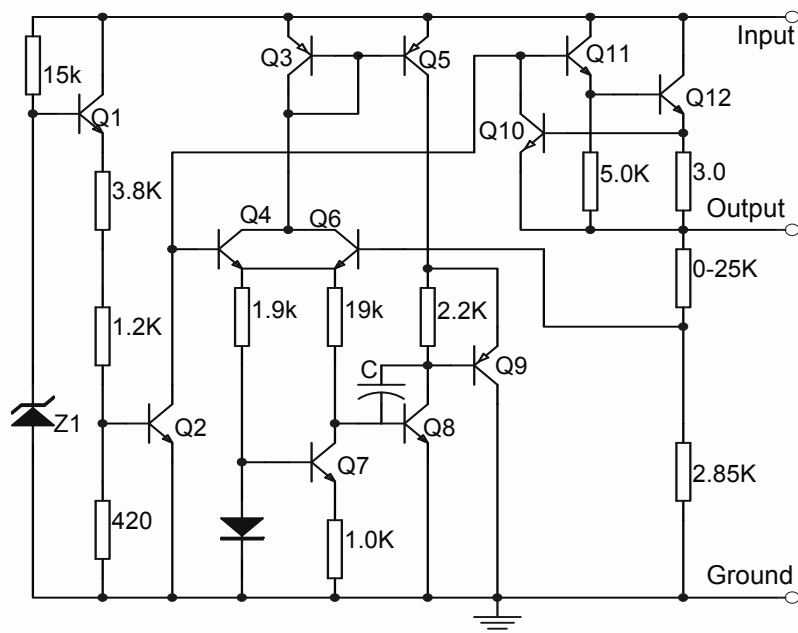

## Packages & Pin Assignments


GS78LxxYF (SOT-89)			GS78LxxSF (SOP-8)			GS78LxxNF (TO-92)		
PIN NO.	GS78L05YF	GS78L05YUF GS78L12YUF	PIN NO.	GS78L05SF GS78L12SF	PIN NO.	GS78L05NF GS78L12NF		
1	V <sub>IN</sub>	V <sub>OUT</sub>	1	V <sub>OUT</sub>	1	V <sub>OUT</sub>		
2	GND	GND	8	V <sub>IN</sub>	2	G <sub>ND</sub>		
3	V <sub>OUT</sub>	V <sub>IN</sub>	2,3,6,7	GND	3	V <sub>IN</sub>		
			4,5	NC				

## Ordering Information

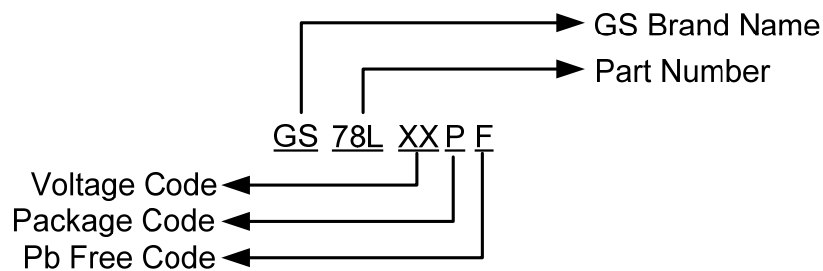

\*Request for other voltages, please contact factory directly.

## Marking Information

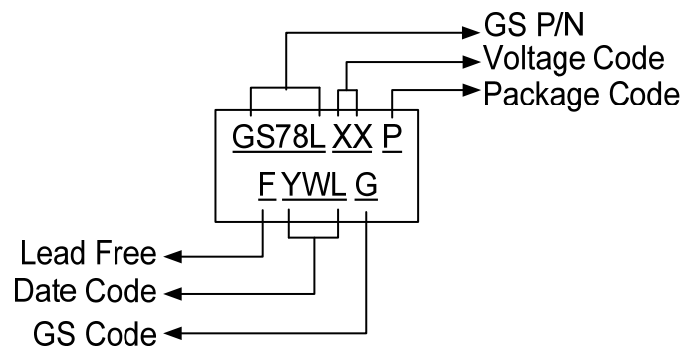

## Absolute Maximum Ratings

( $T_A=+125^{\circ}\text{C}$ , unless otherwise noted.)

Symbol	Parameter	Maximum	Unit
$V_{IN}$	Input Voltage	25	V
$P_D$	Power Dissipation	SOT-89	0.5
		SOP-8	0.625
		TO-92	0.5
$\theta_{JA}$	The Junction-To-Ambient Thermal Resistance	SOT-89	200
		SOP-8	160
		TO-92	200
$T_J$	Operating Junction Temperature Range	-20 to +120	$^{\circ}\text{C}$
$T_{STG}$	Storage Temperature Range	-65 to +150	$^{\circ}\text{C}$

## GS78L05 Electrical Characteristics

( $V_{IN}=10\text{V}$ ,  $I_{OUT}=40\text{mA}$ ,  $C_{IN}=0.33\mu\text{F}$ ,  $C_{OUT}=0.1\mu\text{F}$ ,  $0^{\circ}\text{C} < T_J < +125^{\circ}\text{C}$ , unless otherwise noted.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{OUT}$	Output Voltage	$T_J=+25^{\circ}\text{C}$	4.8	5.0	5.2	V
$\text{Reg}_{LINE}$	Line Regulation	$T_J=+25^{\circ}\text{C}$ , $I_{OUT}=40\text{mA}$ $7.0\text{V} \leq V_{IN} \leq 20\text{V}$ , $8.0\text{V} \leq V_{IN} \leq 20\text{V}$	--	55	150	mV
			--	45	100	mV
$\text{Reg}_{LOAD}$	Load Regulation	$T_J=+25^{\circ}\text{C}$ , $1.0\text{mA} \leq I_{OUT} \leq 100\text{mA}$ $T_J=+25^{\circ}\text{C}$ , $1.0\text{mA} \leq I_{OUT} \leq 40\text{mA}$	--	11	60	mV
			--	5.0	30	mV
$V_{OUT}$	Output Voltage	$7.0\text{V} \leq V_{IN} \leq 20\text{V}$ , $1.0\text{mA} \leq I_{OUT} \leq 40\text{mA}$ $V_{IN}=10\text{V}$ , $1.0\text{mA} \leq I_{OUT} \leq 70\text{mA}$	4.75	--	5.25	V
			4.75	--	5.25	
$I_B$	Input Bias Current	$T_J=+25^{\circ}\text{C}$ $T_J=+125^{\circ}\text{C}$	--	3.8	6.0	mA
			--	--	5.5	
$\Delta I_B$	Input Bias Current Change	$8.0\text{V} \leq V_I \leq 20\text{V}$ $1.0\text{mA} \leq I_O \leq 40\text{mA}$	--	--	1.5	mA
			--	--	0.1	
$V_N$	Output Noise Voltage	$T_A=+25^{\circ}\text{C}$ , $10\text{Hz} \leq f \leq 100\text{kHz}$	--	40	--	$\mu\text{V}$
RR	Ripple Rejection	$I_{OUT}=40\text{mA}$ , $f=120\text{Hz}$ , $8.0\text{V} \leq V_{IN} \leq 18\text{V}$ , $T_J=+25^{\circ}\text{C}$	41	49	--	dB
$V_{IN}-V_{OUT}$	Dropout Voltage	$T_J=+25^{\circ}\text{C}$	--	1.7	--	V


## GS78L08 Electrical Characteristics

( $V_{IN}=14V$ ,  $I_{OUT}=40mA$ ,  $C_{IN}=0.33\mu F$ ,  $C_{OUT}=0.1\mu F$ ,  $0^{\circ}C < T_J < +125^{\circ}C$ , unless otherwise noted.)


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{OUT}$	Output Voltage	$T_J=+25^{\circ}C$	7.6	8.0	8.4	V
$Reg_{LINE}$	Line Regulation	$T_J=+25^{\circ}C$ , $I_{OUT}=40mA$ $10.5V \leq V_{IN} \leq 23V$ , $11V \leq V_{IN} \leq 23V$	--	10	175	mV
$Reg_{LOAD}$	Load Regulation	$T_J=+25^{\circ}C$ , $1.0mA \leq I_{OUT} \leq 100mA$ $T_J=+25^{\circ}C$ , $1.0mA \leq I_{OUT} \leq 40mA$	--	15	80	mV
$V_{OUT}$	Output Voltage	$10.5V \leq V_{IN} \leq 23V$ , $1.0mA \leq I_{OUT} \leq 40mA$ $V_{IN}=14V$ , $1.0mA \leq I_{OUT} \leq 70mA$	7.6	--	8.4	V
$I_B$	Input Bias Current	$T_J=+25^{\circ}C$ $T_J=+125^{\circ}C$	--	3.8	6.0	mA
$\Delta I_B$	Input Bias Current Change	$11V \leq V_I \leq 23V$ $1.0mA \leq I_O \leq 40mA$	--	--	1.5	mA
$V_N$	Output Noise Voltage	$T_A=+25^{\circ}C$ , $10Hz \leq f \leq 100kHz$	--	40	--	$\mu V$
RR	Ripple Rejection	$I_{OUT}=40mA$ , $f=120Hz$ , $8.0V \leq V_{IN} \leq 18V$ , $T_J=+25^{\circ}C$	41	49	--	dB
$V_{IN}-V_{OUT}$	Dropout Voltage	$T_J=+25^{\circ}C$	--	1.7	--	V

## Typical Performance Characteristics


### Dropout Characteristics

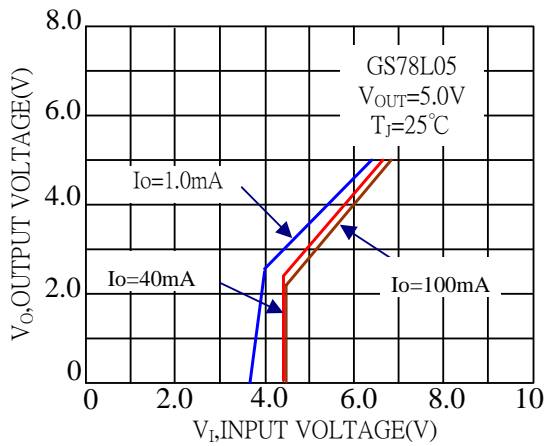


### Dropout Voltage versus Junction Temperature

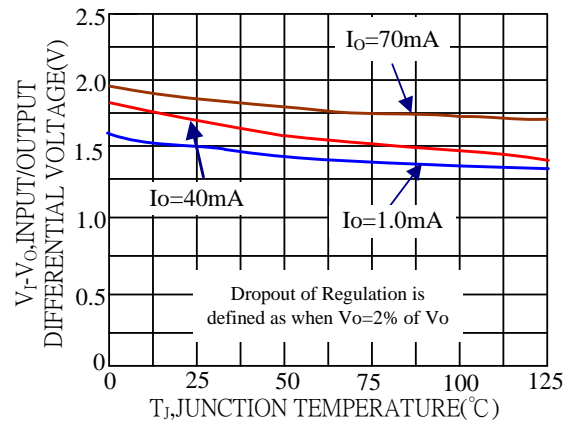


### Input Bias Current versus Ambient Temperature

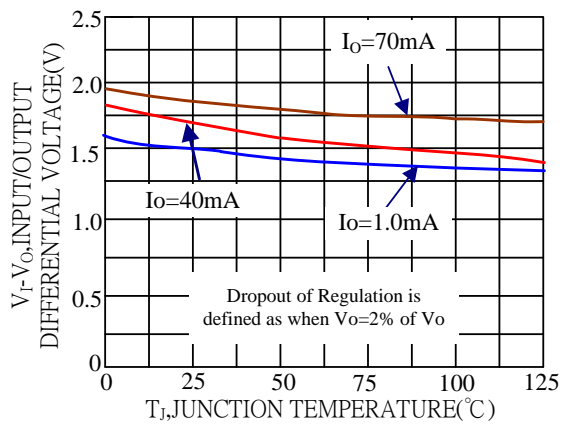


### Input Bias Current versus Input Voltage

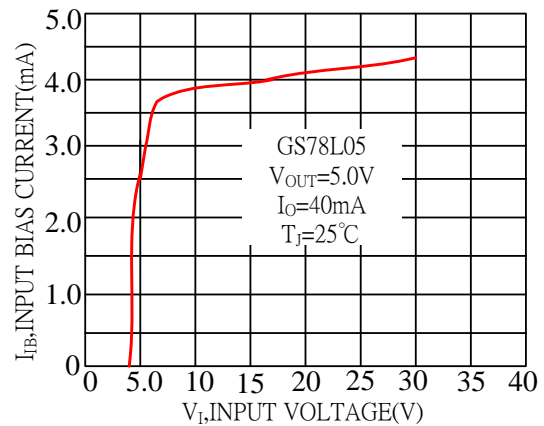

### Maximum Average Power Dissipation versus Ambient Temperature TO-92 Type Package

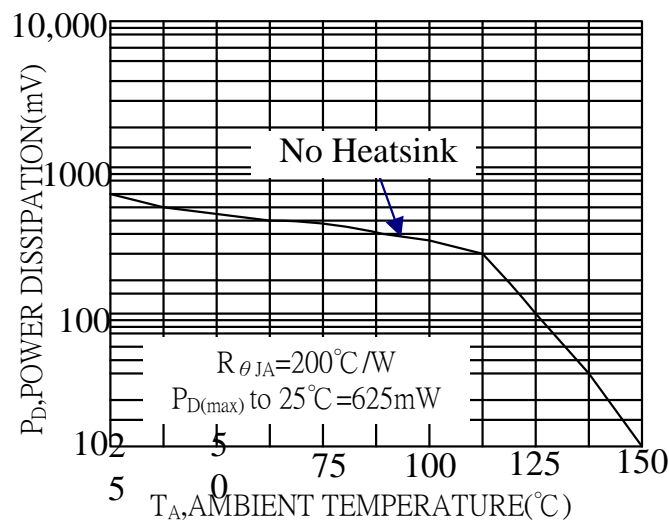

## Typical Applications

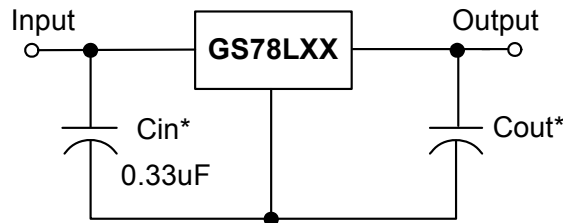

A common ground is required between the input and the output voltages.

\*  $C_{IN}$  is required if regulator is located an appreciable distance from power supply filter.

\*\*  $C_{OUT}$  is not needed for stability, however, it does improve transient response.

## Design Considerations

The GS78LXX Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition. Internal Short Circuit Protection Limits the maximum current the circuit will pass.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. The input bypass capacitor should be selected to provide good high-frequency characteristics to insure stable operation under all load conditions. A 0.33  $\mu$ F or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulators input terminals. Good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead. Bypassing the output is also recommended.


## Current Regulator

The GS78LXX regulators can also be used as a current source when connected as above. In order to minimize dissipation the GS78L05 is chosen in this application. Resistor R determines the current as follows:


$$I_{out} = \frac{5.0V}{R} + I_B$$

$I_B = 3.8\text{mA}$  over line and load changes

For example, a 100mA current source would require R to be a 50 $\Omega$ , 1/2 W resistor and the output voltage compliance would be the input voltage less 7V.

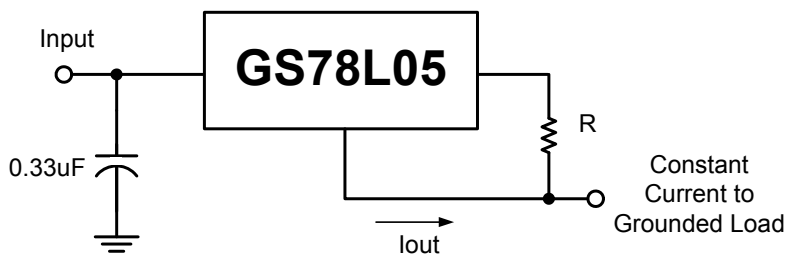


## Positive and Negative Regulator

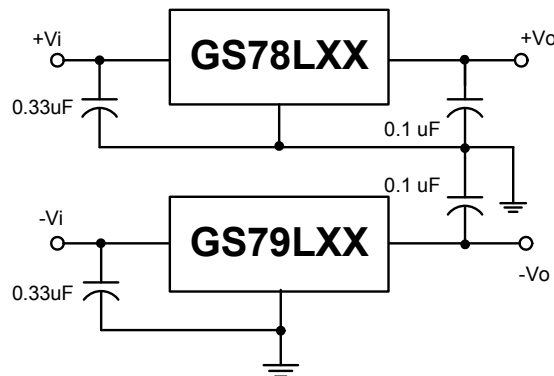


## Package Dimension

# SOP-8 PLASTIC PACKAGE

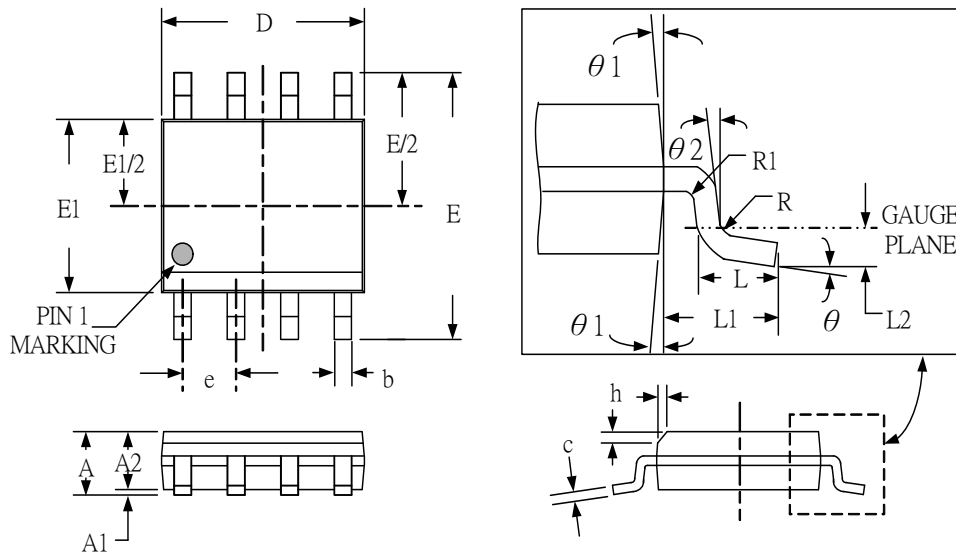

Dimensions				
SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	1.35	1.75	.053	.069
A1	0.10	0.25	.004	.010
A2	1.25	1.65	.049	.065
b	0.31	0.51	.012	.020
c	0.17	0.25	.007	.010
D	4.90 (TYP)		.193 (TYP)	
E	6.00 (TYP)		.236 (TYP)	
E1	3.90 (TYP)		.154 (TYP)	
e	1.27 (TYP)		.050 (TYP)	
L	0.40	1.27	.016	.050
L1	1.04 (TYP)		.041 (TYP)	
L2	0.25 (TYP)		.010 (TYP)	
R	0.07	-	.003	-
R1	0.07	-	.003	-
h	0.25	0.50	.010	.020
θ	0°	8°	0°	8°
θ1	5°	15°	5°	15°
θ2	0°	-	0°	-

# SOT-89 PLASTIC PACKAGE

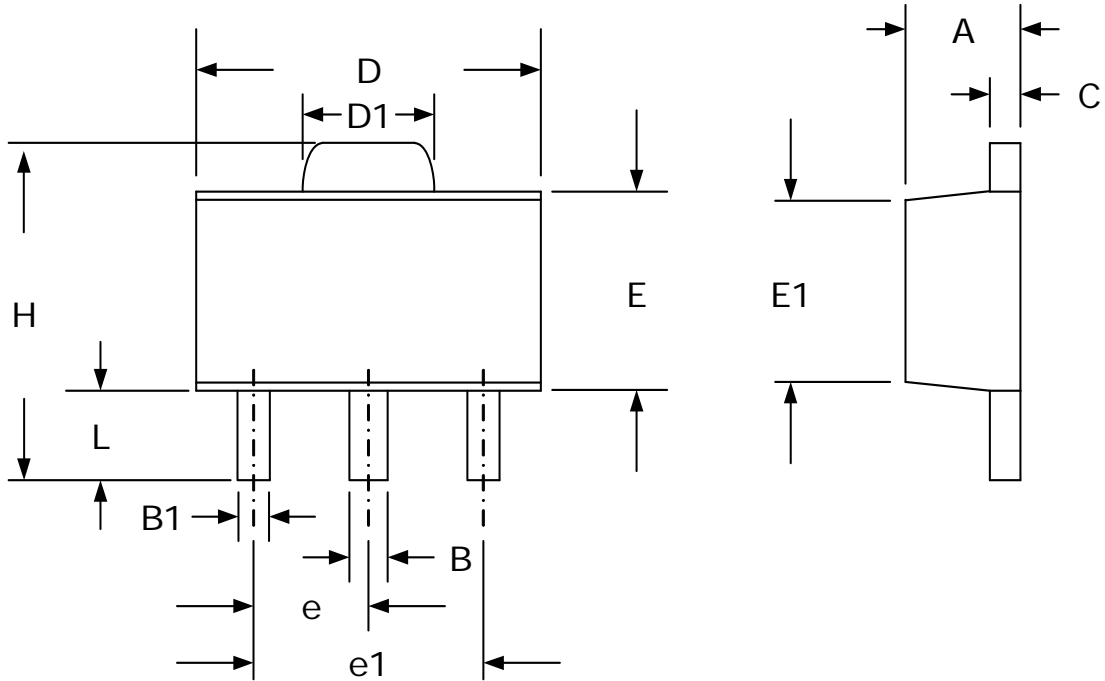


## Dimensions

SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	1.40	1.60	.055	.063
B	0.44	0.56	.017	.022
B1	0.36	0.48	.014	.019
C	0.35	0.44	.014	.017
D	4.40	4.60	.173	.181
D1	1.62	1.83	.064	.072
E	2.29	2.60	.090	.102
E1	2.13	2.29	.084	.090
e	1.50 (TYP)		.059 (TYP)	
e1	3.00 (TYP)		.118 (TYP)	
H	3.94	4.25	.155	.167
L	0.89	1.20	.035	.047



# TO-92 PLASTIC PACKAGE

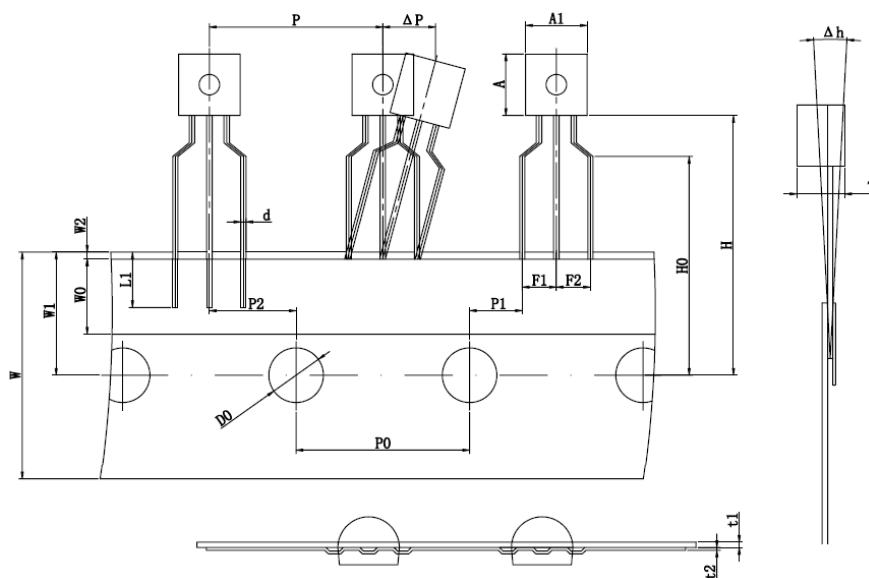





## Dimensions

SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A1	4.4	4.6	.173	.181
A	4.4	4.6	.173	.181
T	3.4	3.6	.133	.142
d	.36	.40	.014	.016
P	12.4	13.0	.487	.512
P0	12.5	12.9	.491	.508
P2	6.05	6.65	.238	.262
F1,F2	2.2	2.8	.086	.110
Δh	-1.0	1.0	-.039	.039
W	17.5	19	.688	.748
W0	5.5	6.5	.216	.256
W1	8.5	9.5	.334	.374
W2	-	1	-	.039
H	19.	21	.747	.827
H0	15.5	16.5	.609	.650
L1	2.5	-	.098	-
D0	3.8	4.2	.149	.165
t1	.35	.45	.014	.018
t2	.15	.25	.006	.010
P1	3.55	4.15	.140	.163
ΔP	-1	1	-.039	.039



## NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

## CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

Wu-Xi Branch	
	No.21 Changjiang Rd., WND, Wuxi, Jiangsu, China (INFO. & TECH. Science Park Building A 210 Room)
	86-510-85217051
	86-510-85211238
	sales_cn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587