

# Pb Free Plating Product

## ESAC25M-02N/ESAC25M-04N/ESAC25M-06N TROHS





10 Ampere Insulated Common Anode Fast Recovery Half Bridge Rectifiers

### **Features**


- ★ Latest GPP technology with super fast recovery time
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

#### Application

- ★ Automotive Inverters and Solar Inverters
- ★ Plating Power Supply,SMPS,EPS and UPS
- Car Audio Amplifiers and Sound Device Systems

#### **Mechanical Data**

- ★ Case: Fully Isolated Molding TO-220FP
- **★** Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: As marked on diode body
- **★** Mounting position: Any
- ★ Weight: 2.0 gram approximately



### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	ESAC25M-02N	ESAC25M-04N	ESAC25M-06N	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	200	400	600	V
Maximum RMS Voltage	VRMS	140	280	420	V
Maximum DC Blocking Voltage	VDC	200	400	600	V
Maximum Average Forward Rectified Current Tc=100°C	IF(AV)	10.0			А
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	100			А
Maximum Instantaneous Forward Voltage @ 5.0 A	VF	0.98	1.3	1.7	V
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	lR	5.0 100			uA uA
Maximum Reverse Recovery Time (Note 1)	Trr	35			nS
Typical junction Capacitance (Note 2)	CJ	65			pF
Typical Thermal Resistance (Note 3)	Raic	2.2			°C/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to +150			°C


NOTES : (1) Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.

- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
- (3) Thermal Resistance junction to case.

© 2006 Thinki Semiconductor Co., Ltd.

Rev.05



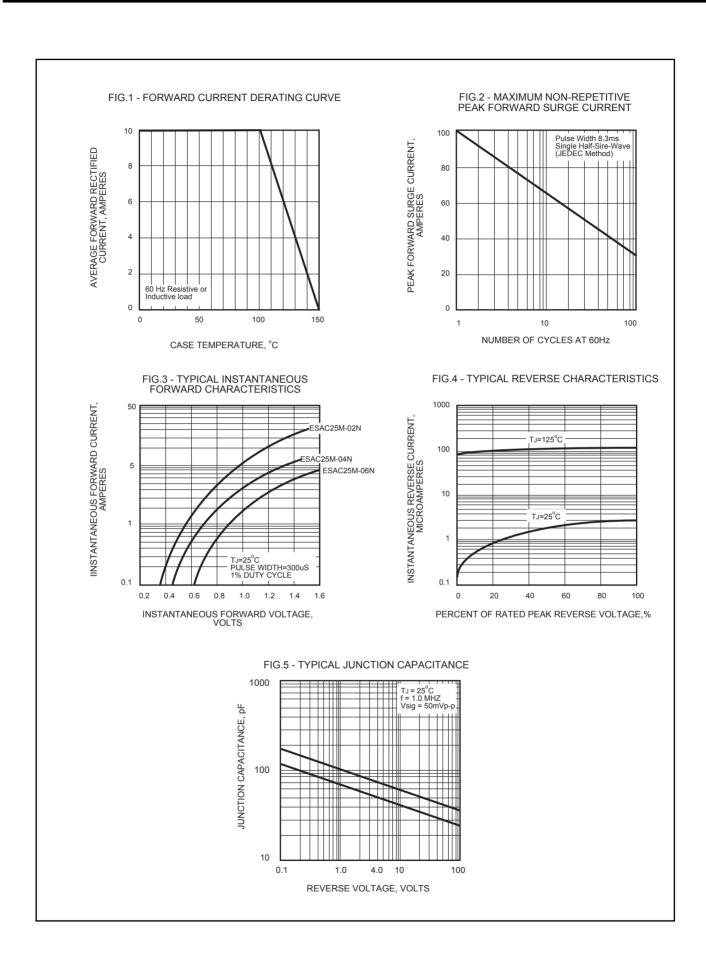

Rev.05 Page 2/2