



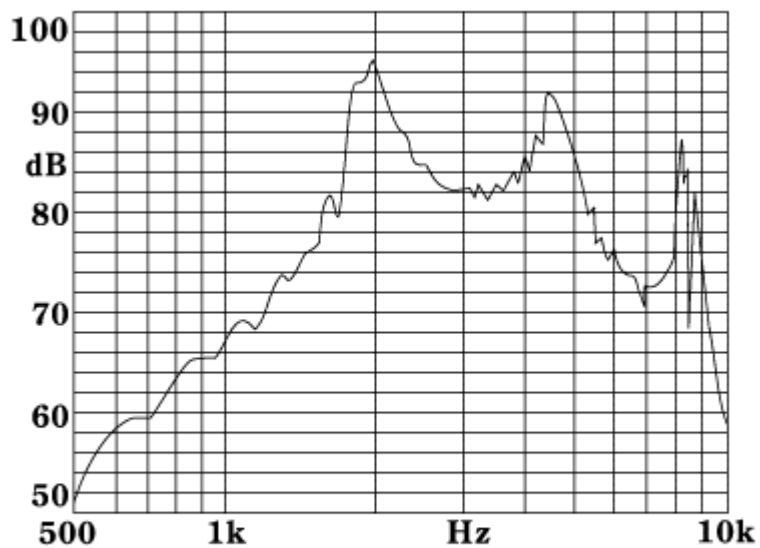

Type	BMT-1601S	BMT-1606S	BMT-1612S
Rated Voltage(V)	1.5	6	12
Operating Voltage(V)	1~2	4~8	9~15
◆Rated Current(mA)	≤12	≤40	
Coil Resistance(Ω)	27 ±3	50±5	115±12
◇Coil Impedance(Ω)	80	110	200
◆Sound Output at 10cm(dB)	>80	>85	
Resonant Frequency(Hz)	2048		
Operating Temperature(°C)	-25~+70		
Storage Temperature(°C)	-30~+85		
Weight(g)	7		

◆ Value applying rated voltage(2048Hz, 1/2 duty, square wave)
 ◇ Value applying (2048Hz, sine wave, measuring current 60μA)

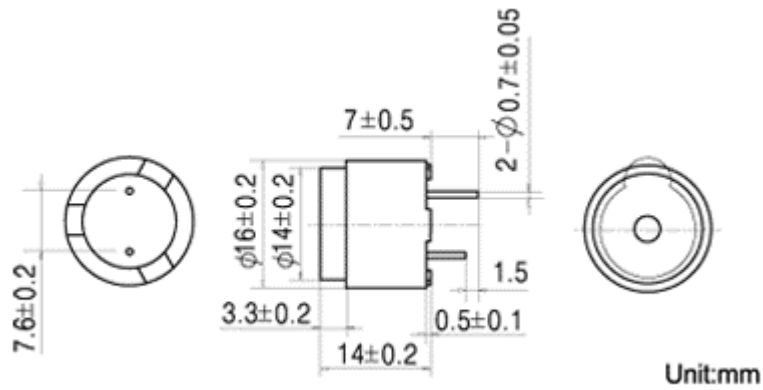

Applied voltage: 6V, 1/2 duty, square wave
 Distance for measurement: 10cm