

2SC5592

Silicon NPN epitaxial planer type

For DC-DC converter

For various driver circuits

■ Features

- Low collector to emitter saturation voltage $V_{CE(sat)}$, large current capacitance
- High-speed switching
- Mini type 3-pin package, allowing downsizing and thinning of the equipment.
- Complementary pair with 2SA2010

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector to base voltage	V_{CBO}	15	V
Collector to emitter voltage	V_{CEO}	15	V
Emitter to base voltage	V_{EBO}	5	V
Peak collector current	I_{CP}	10	A
Collector current	I_C	2.5	A
Collector power dissipation *	P_C	600	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$


Note) *: Measure on the ceramic substrate at $15 \times 15 \times 0.6 \text{ mm}^3$.

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = 10 \text{ V}, I_E = 0$			0.1	μA
Collector to base voltage	V_{CBO}	$I_C = 10 \mu\text{A}, I_E = 0$	15			V
Collector to emitter voltage	V_{CEO}	$I_C = 1 \text{ mA}, I_B = 0$	15			V
Emitter to base voltage	V_{EBO}	$I_E = 10 \mu\text{A}, I_C = 0$	5			V
Forward current transfer ratio * ¹	h_{FE1}	$V_{CE} = 2 \text{ V}, I_C = 100 \text{ mA}$	400		1 000	
	h_{FE2}	$V_{CE} = 2 \text{ V}, I_C = 2.5 \text{ A}$	280			
Collector to emitter saturation voltage * ¹	$V_{CE(sat)}$	$I_C = 1 \text{ A}, I_B = 10 \text{ mA}$		110		mV
		$I_C = 2.5 \text{ A}, I_B = 50 \text{ mA}$		220	320	mV
Collector output capacitance	C_{ob}	$V_{CB} = 10 \text{ V}, I_E = 0, f = 1 \text{ MHz}$	30			pF
Transition frequency	f_T	$V_{CB} = 10 \text{ V}, I_E = -50 \text{ mA}$ $f = 200 \text{ MHz}$	180			MHz
Turn-on time * ²	t_{on}			30		ns
Storage time * ²	t_{stg}			100		ns
Fall time * ²	t_f			10		ns

Note) *1: Rank classification ($\leq 1 \text{ ms}$)

*2: Refere to the measurement circuit.

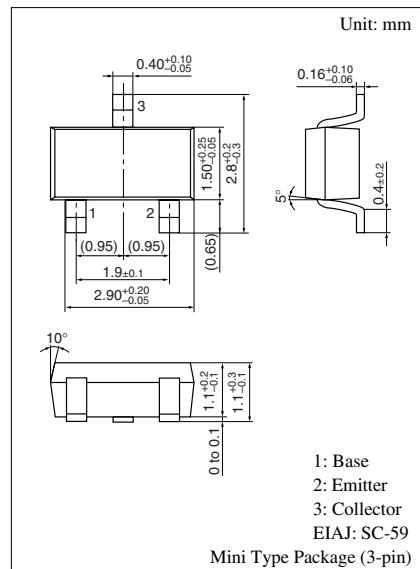

Marking Symbol: 2T

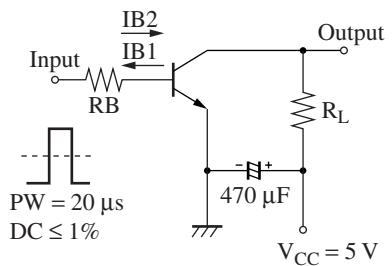■ Measurement Circuit

$$-20IB_1 = 20IB_2 = IC = 1.5\ A$$