

<b>SANYO</b>	No.1005B	2SK315
	N-Channel Junction Silicon Field-Effect Transistor	
FM TUNER APPLICATIONS		

**Features**

- . Ideal for FM tuners in radios, stereos, etc.
- . Because it is compactly packaged, sets can be made compact.
- . Small  $c_{rss}$  ( $c_{rss}=0.08pF$  typ).
- . High  $y_{fs}$  ( $y_{fs}=12.0ms$  typ).

**Absolute Maximum Ratings at Ta=25°C**

			unit
Gate to drain voltage	$V_{GDO}$	-20	V
Gate current	$I_G$	10	mA
Drain current	$I_D$	20	mA
Allowable power dissipation	$P_D$	200	mW
Junction temperature	$T_J$	125	°C
Storage temperature	$T_{stg}$	-55 to +125	°C


**Electrical Characteristics at Ta=25°C**

			min	typ	max	unit
Gate to drain breakdown voltage	$V_{(BR)GDO}$	$I_G=-10\mu A$	-20			V
Gate cutoff current	$I_{GSS}$	$V_{GS}=-0.5V, V_{DS}=0V$			-10	nA
Drain current	$I_{DSS}$	$V_{DS}=5V, V_{GS}=0V$	2.5*		24.0*	mA
Cutoff voltage	$V_{GS(off)}$	$V_{DS}=5V, I_D=10\mu A$			-3.5	V
Forward transfer admittance	$ y_{fs}  (1)$	$V_{DS}=5V, V_{GS}=0V, f=1kHz$	6.0	12.0		ms
Forward transfer admittance	$ y_{fs}  (2)$	$V_{DS}=5V, V_{GS}=0V, f=100MHz$	6.0	12.0		ms
Input capacitance	$c_{iss}$	$V_{DS}=5V, V_{GS}=0V, f=1MHz$		8.0		pF
Reverse transfer capacitance	$c_{rss}$	$V_{DS}=5V, V_{GS}=0V, f=1MHz$		0.08	0.3	pF
Output capacitance	$c_{oss}$	$V_{DS}=5V, V_{GS}=0V, f=1MHz$		6.5		pF
Power gain	$PG$	$V_{DS}=5V, V_{GS}=0V, f=100MHz$		23		dB
Noise figure	$NF$	$V_{DS}=5V, V_{GS}=0V, f=100MHz$		2.2	4.0	dB


Refer to specified test circuit.  
See specified Test Circuit.

\* The 2SK315 is graded as follows by  $I_{DSS}$  (unit: mA):

2.5	E	6.0	5.0	F	12.0	10.0	G	24.0
-----	---	-----	-----	---	------	------	---	------





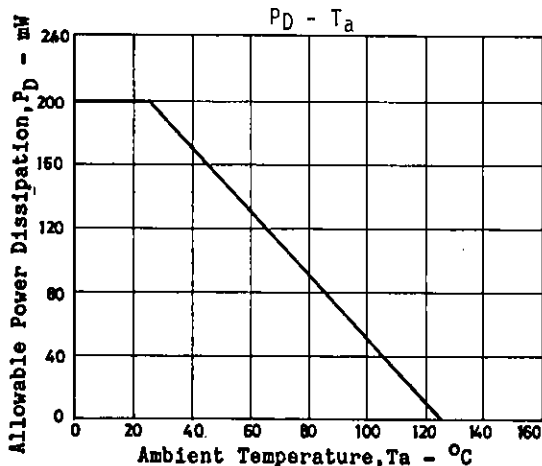










**Package Dimensions 2040**  
(unit: mm)








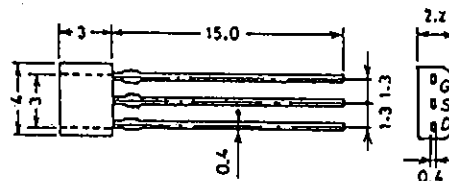


G: Gate  
S: Source  
D: Drain

SANYO: SPA

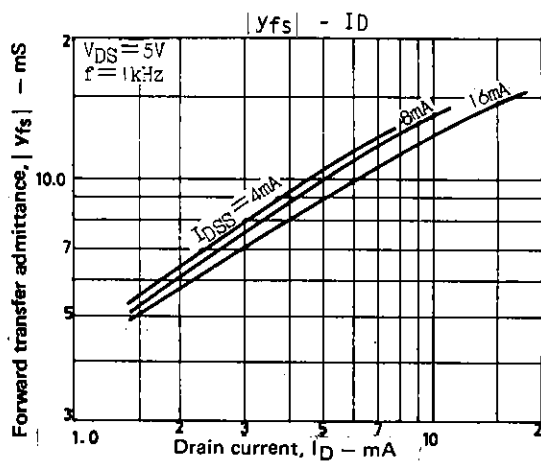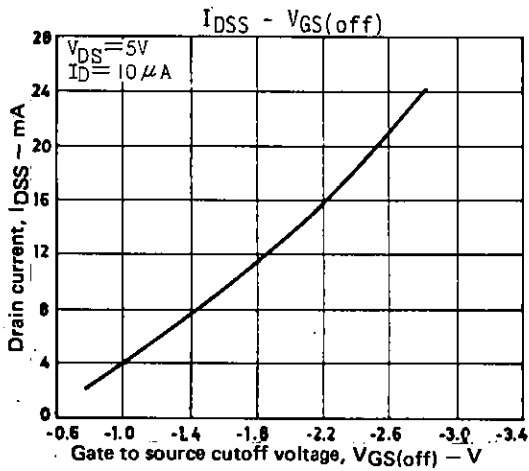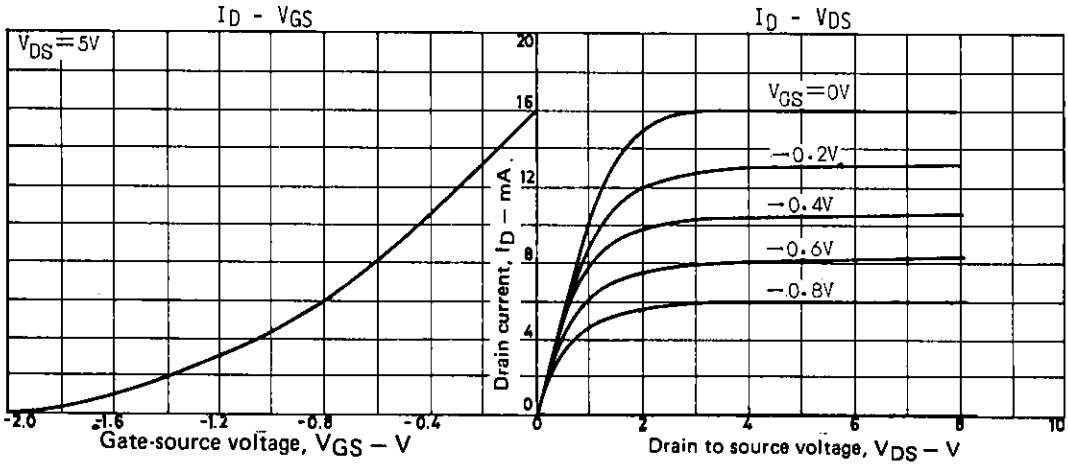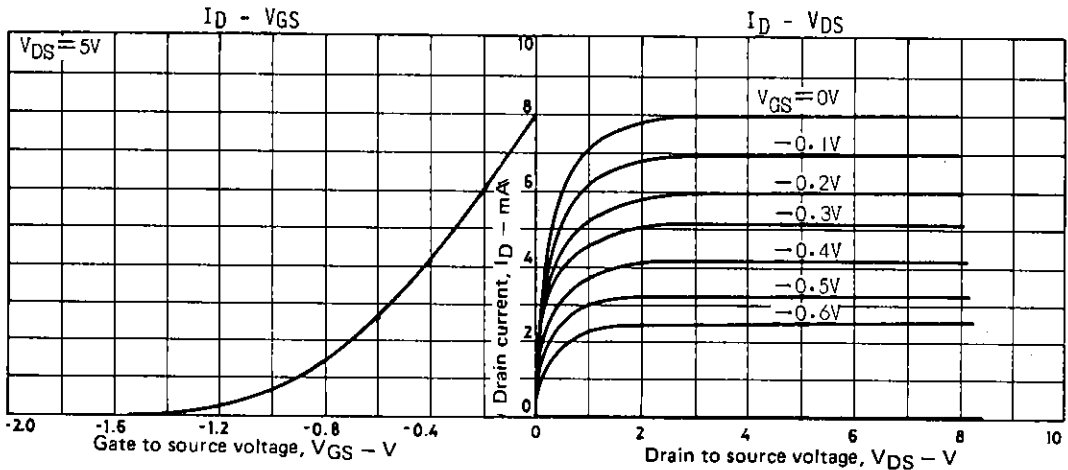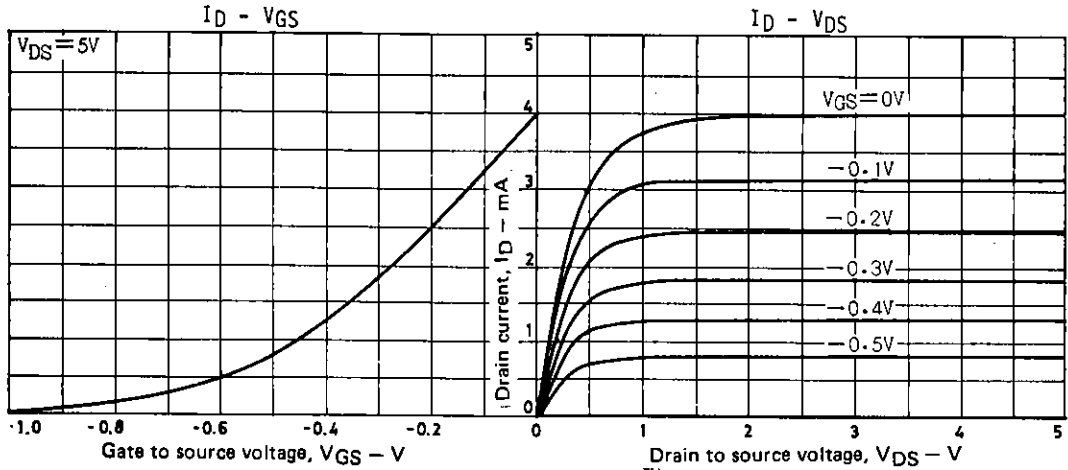

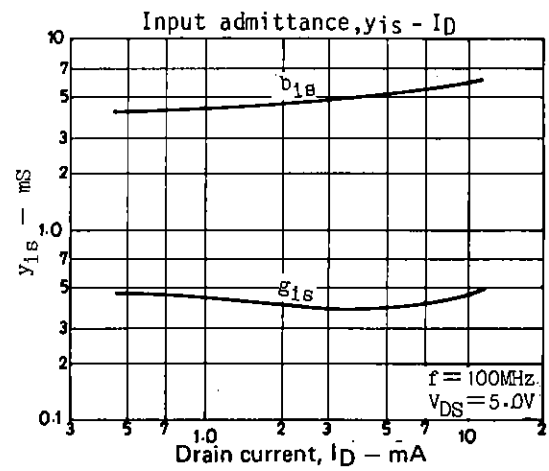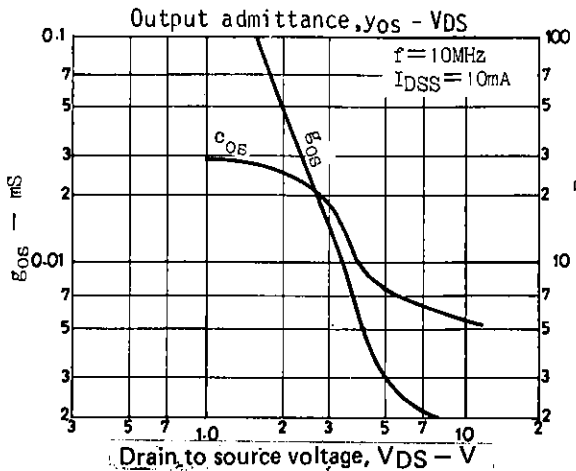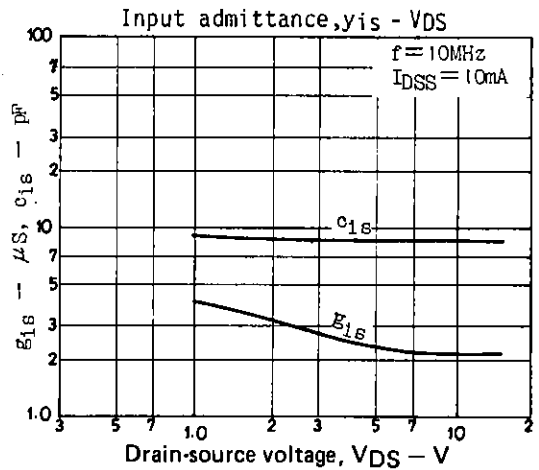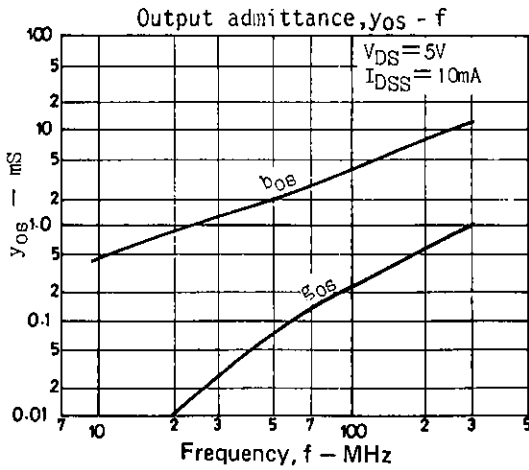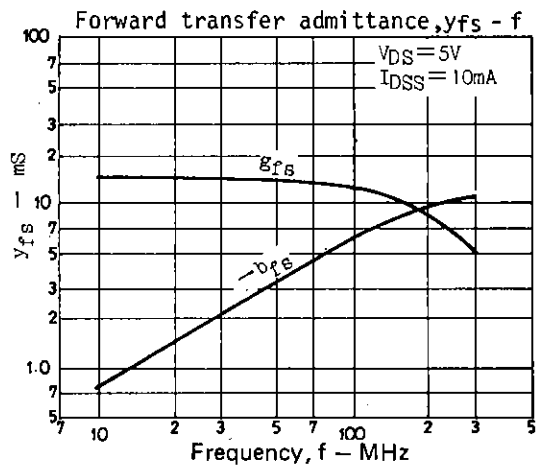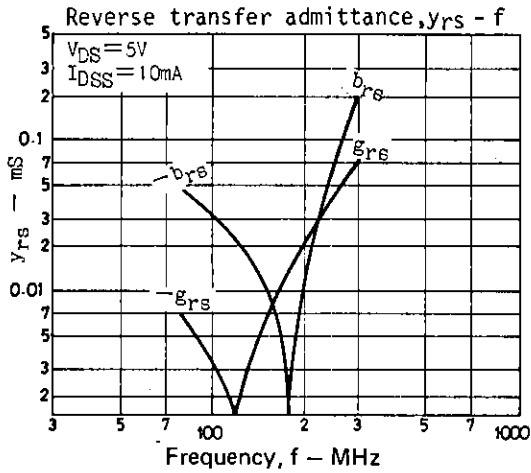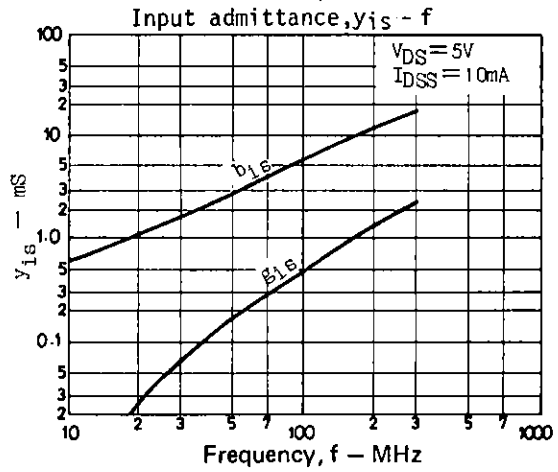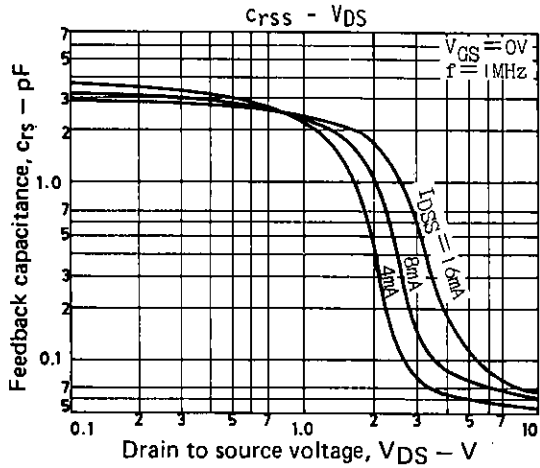

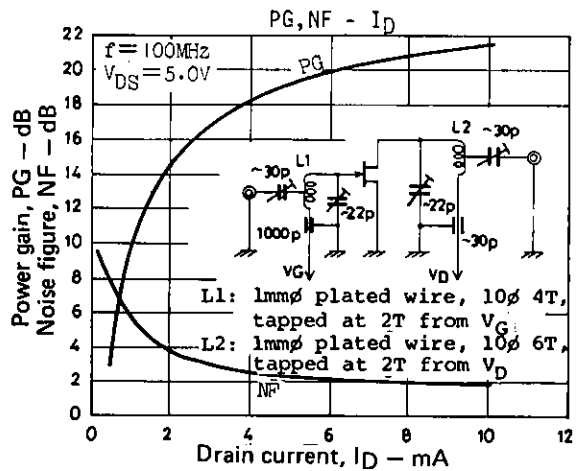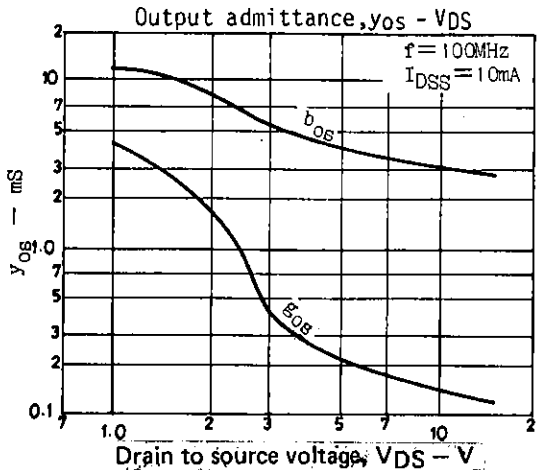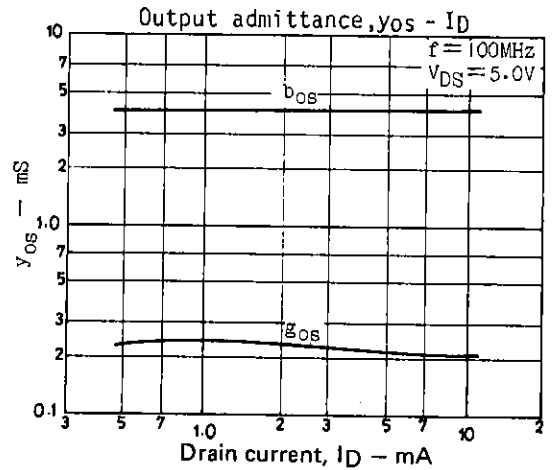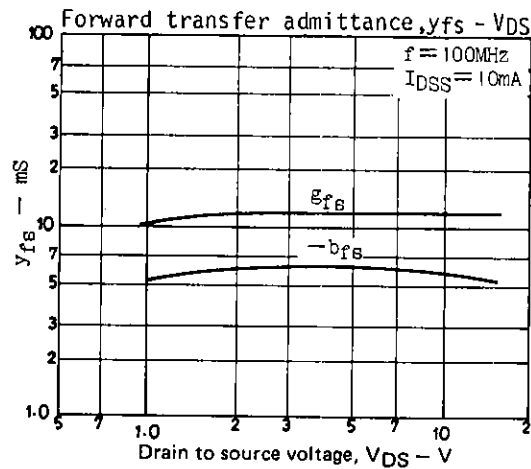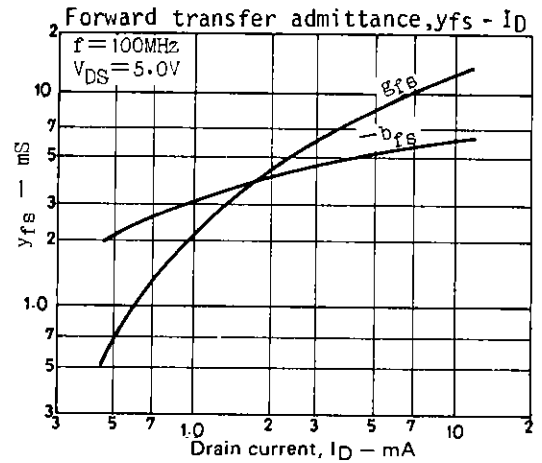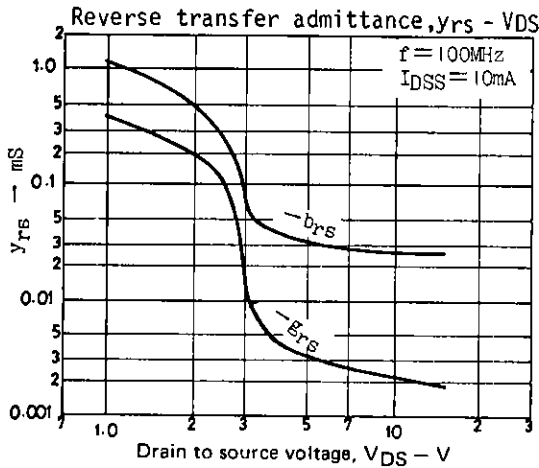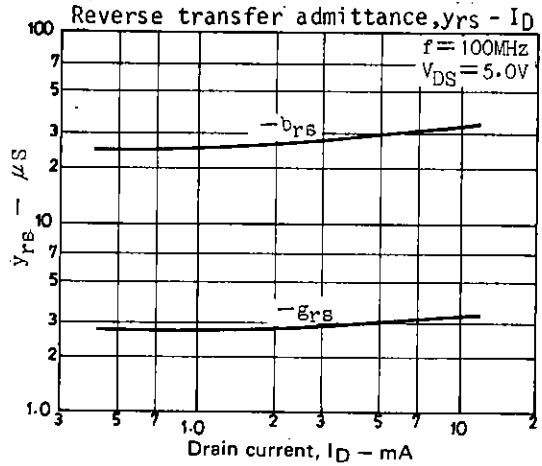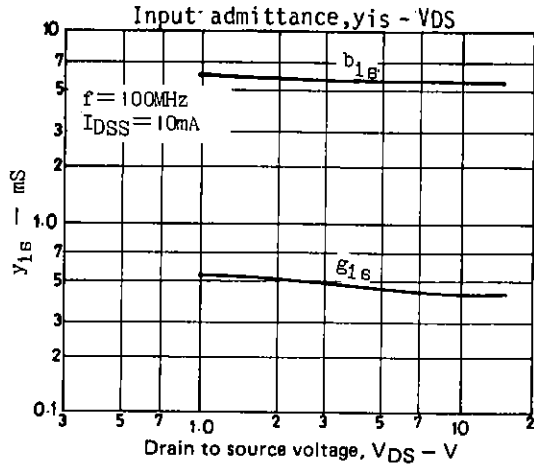

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.