TOSHIBA Field Effect Transistor Silicon N Channel MOS Type

# SSM3K17FU


High Speed Switching Applications Analog Switch Applications

- Suitable for high-density mounting due to compact package
- High drain-source voltage
- High speed switching

## Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit	
Drain-Source voltage		V <sub>DS</sub>	50	V	
Gate-Source voltage		V <sub>GSS</sub>	±7	V	
Drain current	DC	I <sub>D</sub>	100	mA	
	Pulse	I <sub>DP</sub>	200	IIIA	
Drain power dissipation (Ta = $25^{\circ}$ C)		P <sub>D</sub> (Note 1)	150	mW	
Channel temperature		T <sub>ch</sub>	150	°C	
Storage temperature range		T <sub>stg</sub>	-55~150	°C	

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

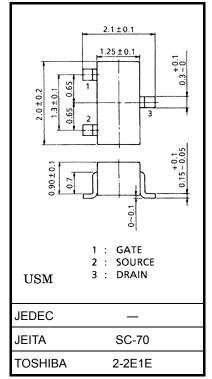


Weight: 6 mg (typ.)


Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Mounted on FR4 board


(25.4 mm × 25.4 mm × 1.6 t, Cu Pad: 0.6 mm<sup>2</sup> × 3)



### Marking



### **Equivalent Circuit**



This transistor is a electrostatic sensitive device. Please handle with caution.

Unit: mm

**Electrical Characteristics (Ta = 25°C)** 


Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit
Gate leakage current		I <sub>GSS</sub>	$V_{GS}$ = ±7 V, $V_{DS}$ = 0	_	_	±5	μA
Drain-Source breakdown voltage		V (BR) DSS	I <sub>D</sub> = 0.1 mA, V <sub>GS</sub> = 0	50	_	_	V
Drain cut-off curre	ent	I <sub>DSS</sub>	V <sub>DS</sub> = 50 V, V <sub>GS</sub> = 0	_	_	1	μA
Gate threshold vo	oltage	V <sub>th</sub>	V <sub>DS</sub> = 3 V, I <sub>D</sub> = 1 μA	0.9	_	1.5	V
Forward transfer	admittance	Y <sub>fs</sub>	V <sub>DS</sub> = 3 V, I <sub>D</sub> = 10 mA	20	40	_	mS
Drain-Source ON resistance		R <sub>DS (ON)</sub>	I <sub>D</sub> = 10 mA, V <sub>GS</sub> = 4 V	_	12	20	Ω
			I <sub>D</sub> = 10 mA, V <sub>GS</sub> = 2.5 V	_	22	40	
Input capacitance	9	C <sub>iss</sub>	V <sub>DS</sub> = 3 V, V <sub>GS</sub> = 0, f = 1 MHz	_	7	_	pF
Reverse transfer capacitance		C <sub>rss</sub>	V <sub>DS</sub> = 3 V, V <sub>GS</sub> = 0, f = 1 MHz	_	3	_	pF
Output capacitance		C <sub>oss</sub>	V <sub>DS</sub> = 3 V, V <sub>GS</sub> = 0, f = 1 MHz	_	7	_	pF
Switching time	Turn-on time	t <sub>on</sub>	V <sub>DD</sub> = 3 V, I <sub>D</sub> = 20 mA, V <sub>GS</sub> = 0~3 V,	_	100	_	ns
	Turn-off time	t <sub>off</sub>	R <sub>G</sub> = 10 Ω, R <sub>L</sub> = 150 Ω	_	40	—	

# Switching Time Test Circuit


(a) Test circuit

(b) V<sub>IN</sub>


(c) V<sub>OUT</sub>





$$\begin{split} & \text{Duty} \leq 1\% \\ & \text{V}_{\text{IN}} \text{:} t_{\text{r}}, \, t_{\text{f}} < 5 \text{ ns} \\ & (\text{Z}_{\text{out}} = 50 \ \Omega) \\ & \text{Common source} \\ & \text{Ta} = 25^{\circ}\text{C} \end{split}$$





# TOSHIBA



















# **TOSHIBA**











## **RESTRICTIONS ON PRODUCT USE**

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
   In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.).These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
  may result from its use. No license is granted by implication or otherwise under any patents or other rights of
  TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.