

## STANDARD CAPACITANCE TVS ARRAY

## APPLICATIONS

- ✓ RS-232, RS-422 & RS-423 Data Lines
- ✓ Microprocessor Based Equipment
- ✓ Control & Monitoring Systems
- ✓ Portable Electronics
- ✓ Sensor Electronics

## IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 12A, 8/20 $\mu$ s - Level 1(Line-Gnd) & Level 2(Line-Line)

## FEATURES

- ✓ 350 Watts Peak Pulse Power per Line ( $t_p=8/20\mu$ s)
- ✓ Protects 6 Unidirectional Lines: Pins 1, 2, 3, 4, 5, 8 to Data Lines, Pins 6 & 7 to Ground
- ✓ Protects 5 Bidirectional Lines: Pins 1, 2, 3, 4, 5 or 8 for Data Lines, Pins 5 or 8 to Ground, Pins 6 & 7 Open
- ✓ ESD Protection > 25 kilovolts
- ✓ Protects 5.0 Volt Components
- ✓ Monolithic Design
- ✓ RoHS Compliant


## MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SO-8
- ✓ Weight 70 milligrams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:  
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 12mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Marking Code, Logo, Date Code & Pin One Defined By Dot on Top of Package



SO-8

## PIN CONFIGURATION

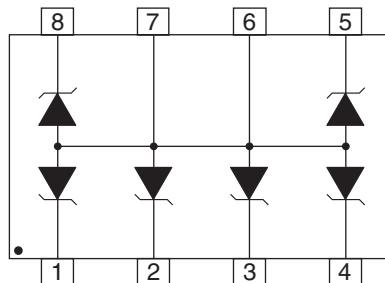

# PSMDA05-6

## DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	350	Watts
Operating Temperature	$T_L$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-55 to 150	°C




### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Notes 1-2)	DEVICE MARKING CODE	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE  @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)  @ $I_P = 1A$ $V_C$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)  @ 8/20 $\mu s$ $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT  @ $V_{WM}$ $I_D$ $\mu A$	MAXIMUM CAPACITANCE  @ 0V, 1 MHz $C_J$ pF
PSMDA05-6	QEB	5.0	6.0	9.8	18V @ 17A	20	120

**Note 1:** Test from individual pins 1, 2, 3, 4, 5 and 8 to ground pins 6 and 7 (Unidirectional Only).


**Note 2:** Pins 6 & 7 not connected for Bidirectional use.

## GRAPHS

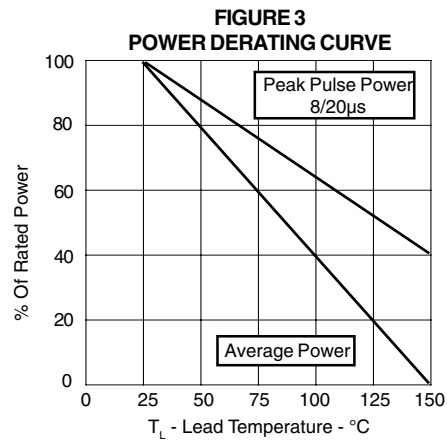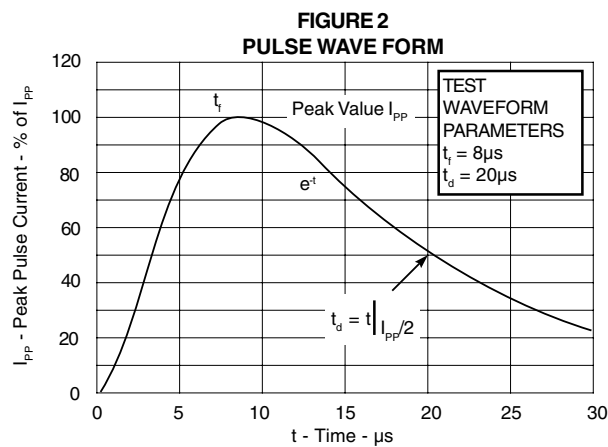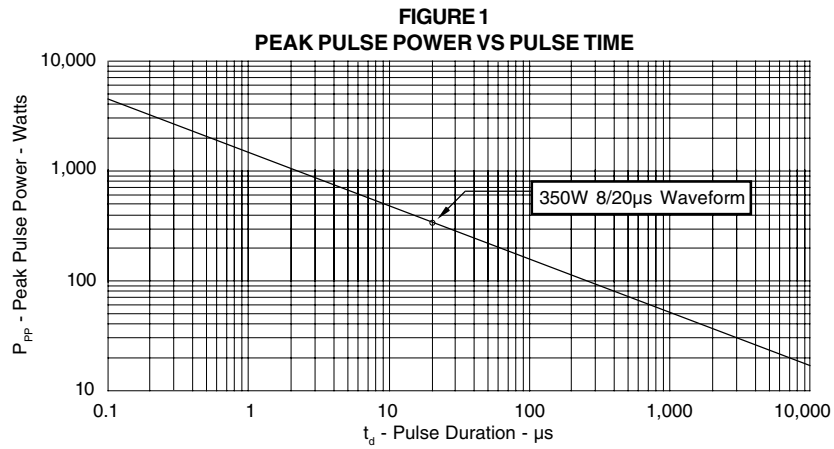

# PSMDA05-6

## SO-8 PACKAGE OUTLINE & DIMENSIONS

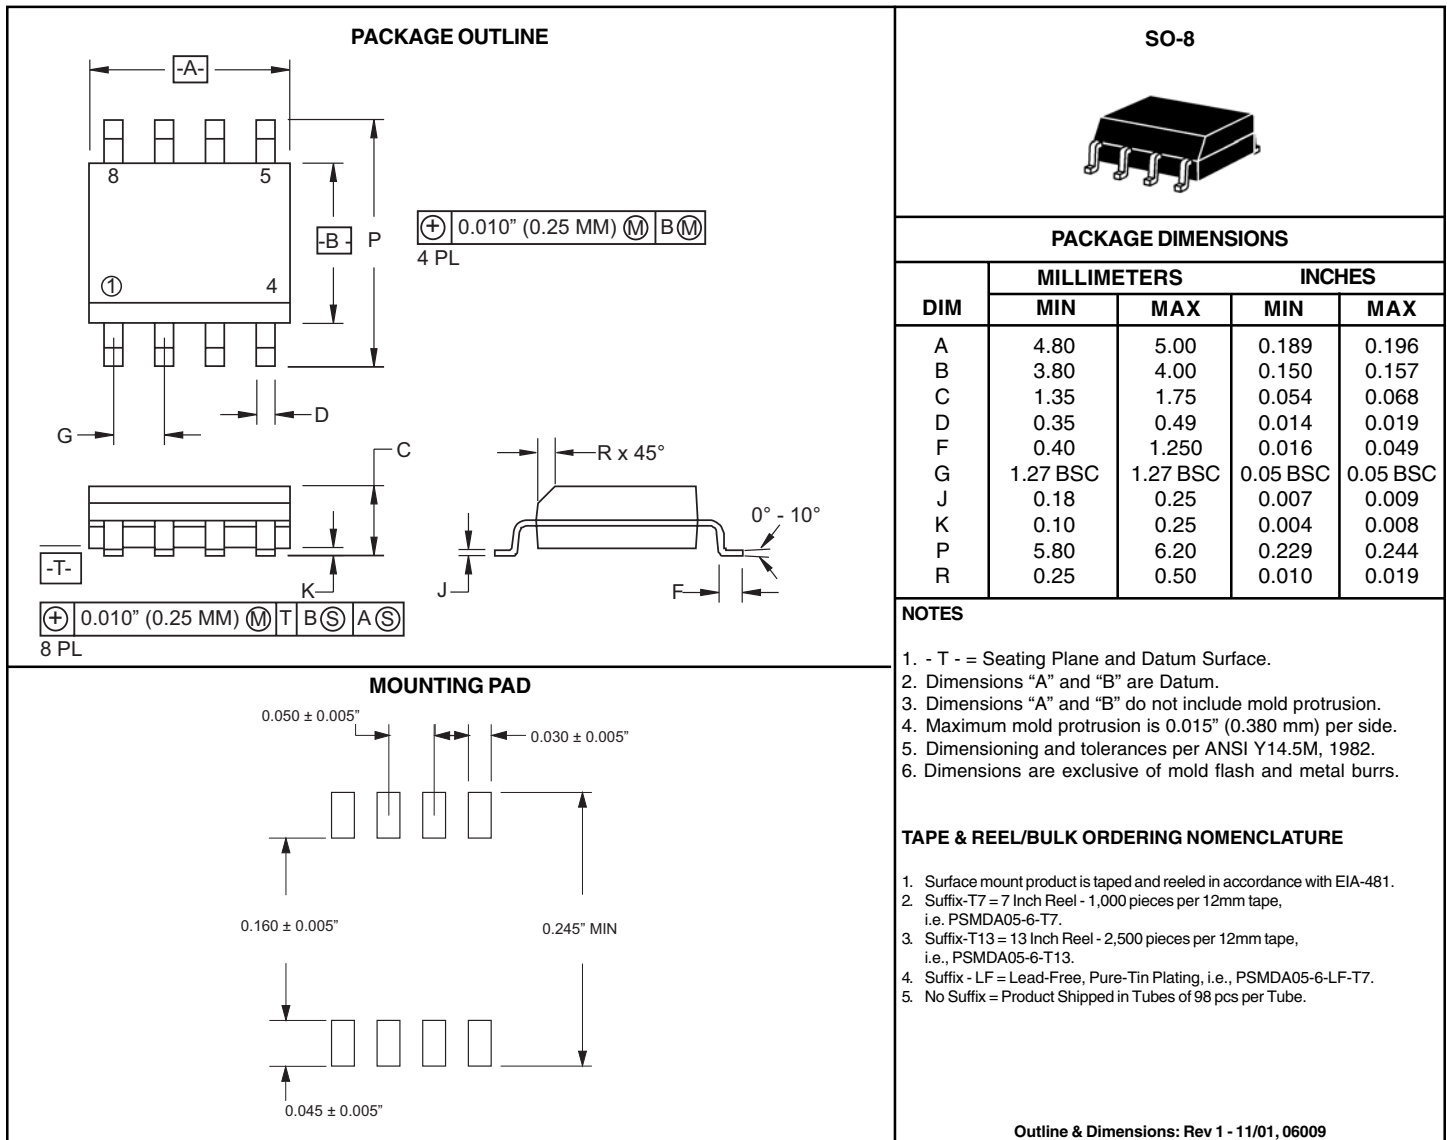

**COPYRIGHT © ProTek Devices 2007**

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**  
 2929 South Fair Lane, Tempe, AZ 85282  
 Tel: 602-431-8101 Fax: 602-431-2288  
 E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
 Web Site: [www.protekdevices.com](http://www.protekdevices.com)