


Blade Fuseholder - Stackable Panel Mount Fuseholder for ATO® Style Blade Fuse



Dimensions in mm / Maße in mm

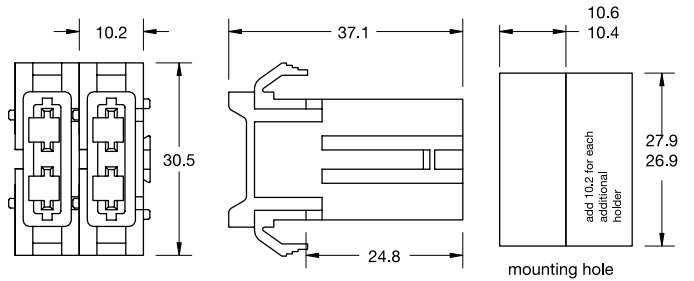

Intended for use with 32V ATO / FKS Fuses rated up to 20A or 30A.

ATO / FKS-Style Flachsicherungen für Sicherungseinsätze bis 20A oder 30A Nennstrom.


| Part Number Artikel-Nr. | Description Beschreibung | Fuse Rating Sicherungs- Nennstrom |
|----------------------------|---|---|
| 01550300_ | 14AWG/2.1mm ² stranded black wire | 20 A |
| 01550400_ | 10AWG/5.3mm ² stranded orange wire | 30 A |

Last figure of part number = packaging code, see Section "Packaging Index," pg. 157.

ATO® Panel Mount Holder Components



Dimensions in mm / Maße in mm

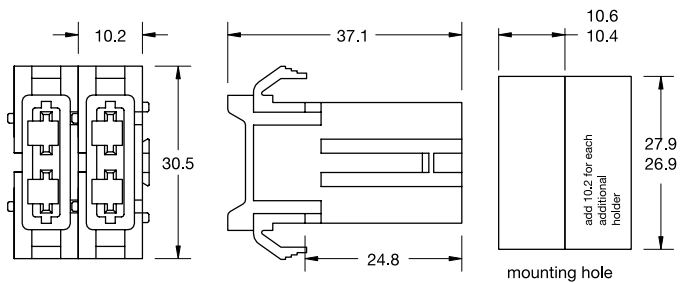

| Part Number Artikel-Nr. | Description Beschreibung | Fuse Rating Sicherungs- Nennstrom |
|----------------------------|---|---|
| 868-062-000 | Housing only, color black - 2700 pcs. | - |
| 913-043 | Reeled Terminals A, wire 14AWG/2.1mm ² - 6000 pcs. | 20A |
| 0913043001 | Singe Terminals A, wire 14AWG/2.1mm ² - 1000 pcs. | 20A |
| 913-042 | Reeled Terminals B, wire 10AWG/5.3mm ² - 5000 pcs. | 30A |
| 0913042001 | Singe Terminals B, wire 10AWG/5.3mm ² - 1000 pcs. | 30A |