

Absolute Maximum Ratings $T_A=25^\circ\text{C}$


Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the

device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to Absolute Maximum Ratings for extended periods of time can adversely affect reliability.


Parameter	Symbol	Test Conditions	LH1521	LH1523	Units
Ambient Operating Temperature Range	T_A	—	-40 to +85	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	—	-40 to +150	-40 to +150	$^\circ\text{C}$
Pin Soldering Temperature	T_S	$t=10\text{ s max}$	260	260	$^\circ\text{C}$
Input/Output Isolation Test Voltage	V_{ISO}	Vrms $t=1\text{ s}$ $I_{ISO}=10\ \mu\text{A max}$	5300	5300	Vrms
Pole-to-Pole Isolation Voltage* (S1 to S2)	—	Dry air, dust free, at sea level	1600	1600	V
LED Continuous Forward Current	I_F	—	50	50	mA
LED Reverse Voltage	V_R	$I_R \leq 10\ \mu\text{A}$	8	8	V
dc or Peak ac Load Voltage	V_L	$I_L \leq 50\ \mu\text{A}$	350	200	V
Continuous dc Load Current One Pole Operating	I_L	—	150	200	mA
Two Poles Operating			110	140	mA
Peak Load Current	I_P	$t=100\text{ ms}$ (single shot)	400	600	mA
Output Power Dissipation (continuous)	P_{DISS}	—	600	600	mW

* Breakdown occurs between the output pins external to the package.

Recommended Operating Conditions

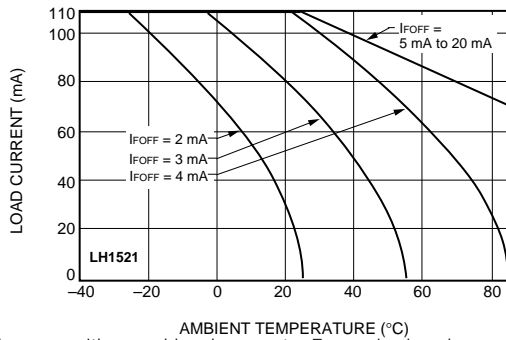

Both relays on with equal load currents. For a single relay operation, refer to LH1501 Recommended Operating Conditions graph.

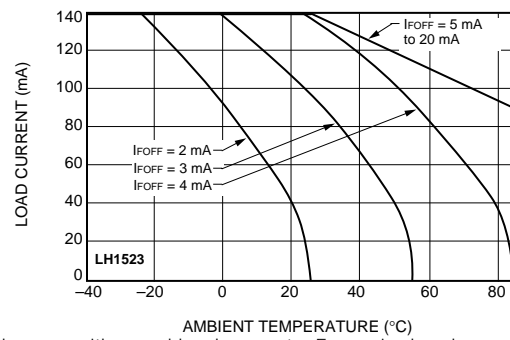

Both relays on with equal load currents. For a single relay operation, refer to LH1511 Recommended Operating Conditions graph.

Electrical Characteristics $T_A=25^\circ\text{C}$


Minimum and maximum values are testing requirements. Typical values are characteristics of the device

and are the result of engineering evaluations. Typical values are for information purposes only and are not part of the testing requirements.


	Parameter	Symbol	Test Conditions	Values	LH1521	LH1523	Units			
INPUT	LED Forward Current for Switch Turn-off	I_{Foff}	—	Min	—	—	mA			
				Typ	1.0	1.0	mA			
				Max	2.0	2.0	mA			
	LED Forward Current for Switch Turn-on	I_{Fon}	$t=10\text{ ms}$	Min	0.2	0.2	mA			
				Typ	0.9	0.9	mA			
				Max	—	—	mA			
				V_L	\pm	300	150	V		
				LED Forward Voltage	V_F	$I_F=10\text{ mA}$	Min	1.15	1.15	V
							Typ	1.22	1.22	V
Max	1.45	1.45	V							
OUTPUT	ON-resistance	R_{ON}	$I_F=0\text{ mA}$ $I_L=50\text{ mA}$	Min	12	6	Ω			
				Typ	20	10	Ω			
				Max	25	15	Ω			
	OFF-resistance	R_{OFF}	$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	0.1	0.1	$\text{G}\Omega$			
				Typ	1.4	1.4	$\text{G}\Omega$			
				Max	—	—	$\text{G}\Omega$			
	Off-state Leakage Current	—	$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	—	—	μA			
				Typ	0.07	0.07	μA			
				Max	1.0	1.0	μA			
				$I_F=5\text{ mA}$	Min	—	—	μA		
					Typ	0.08	0.07	μA		
					Max	1.0	1.0	μA		
	Output Capacitance	—	$I_F=5\text{ mA}$ $V_L=1\text{ V}$	Min	—	—	pF			
				Typ	35	45	pF			
				Max	—	—	pF			
			$I_F=5\text{ mA}$ $V_L=50\text{ V}$	Min	—	—	pF			
				Typ	10	15	pF			
				Max	—	—	pF			
	Pole-to-pole Capacitance	—	$I_F=0\text{ mA}$	Min	—	—	pF			
				Typ	0.5	0.5	pF			
				Max	—	—	pF			
Switch Offset	—	$I_F=0\text{ mA}$	Min	—	—	μV				
			Typ	0.1	0.1	μV				
			Max	—	—	μV				
TRANSFER	Input/Output Capacitance	C_{ISO}	$V_{\text{ISO}}=1\text{ V}$	Min	—	—	pF			
				Typ	1.1	1.1	pF			
				Max	—	—	pF			
	Turn-off Time	t_{off}	$I_F=5\text{ mA}$ $I_L=50\text{ mA}$	Min	—	—	ms			
				Typ	2.0	1.0*	ms			
				Max	3.0	3.0*	ms			
	Turn-on Time	t_{on}	$I_F=5\text{ mA}$ $I_L=50\text{ mA}$	Min	—	—	ms			
				Typ	1.0	1.2*	ms			
				Max	3.0	3.0*	ms			

* $I_F=10\text{ mA}$.


A. LED Voltage vs. Temperature

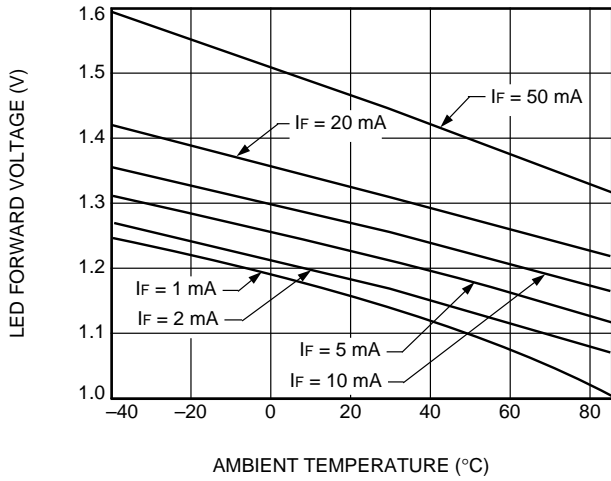


B. LED Dropout Voltage vs. Temperature

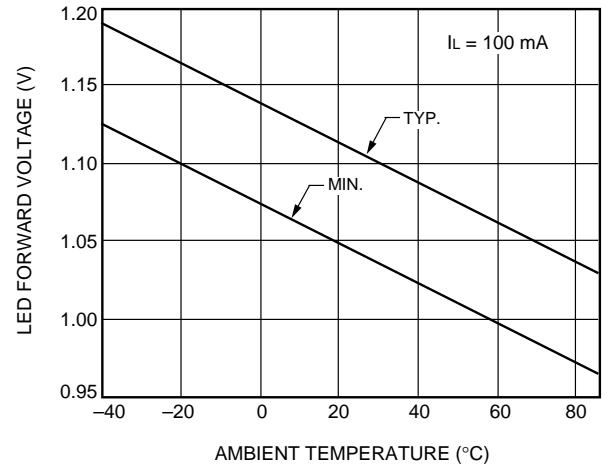


C. LED Current for Switch Turn-Off vs. Temperature

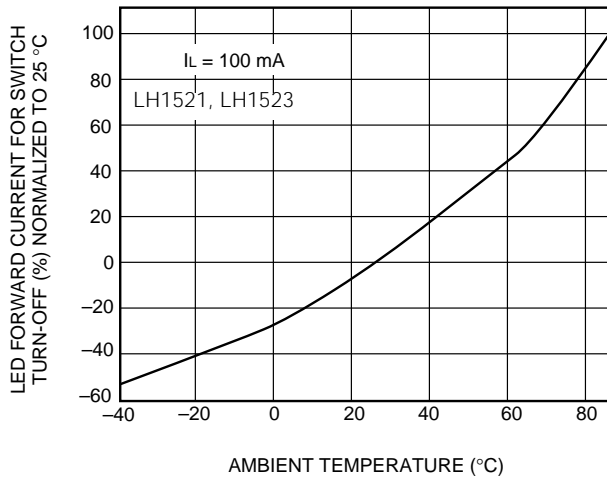


D. ON-Resistance vs. Temperature

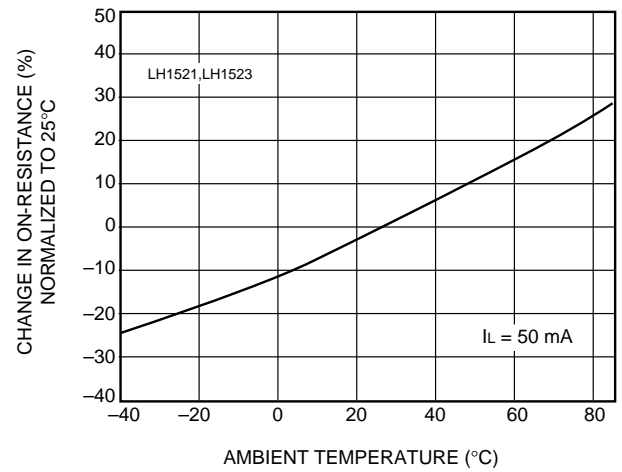


E. Switch Capacitance vs. Applied Voltage

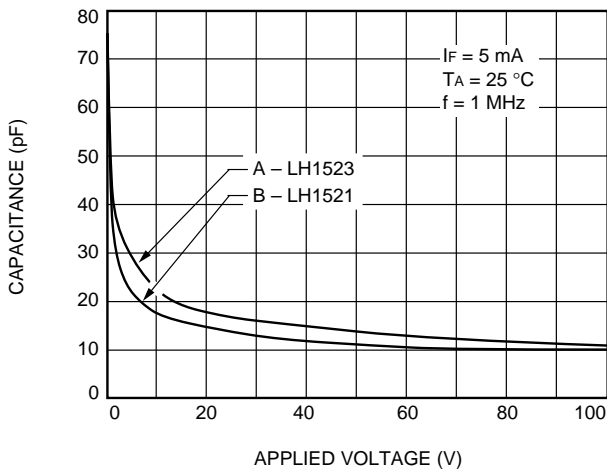


F. Output Isolation

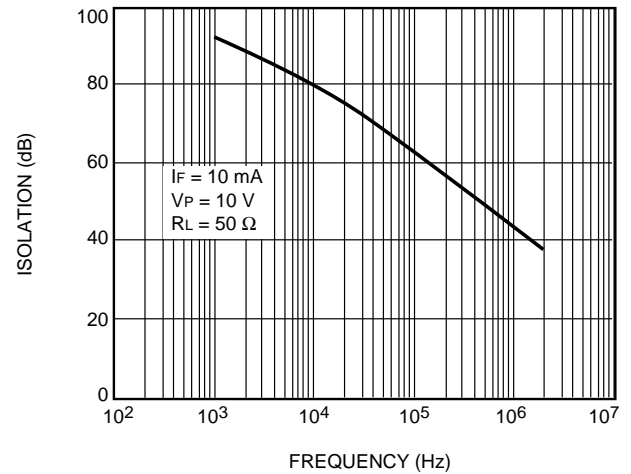


A. Insertion Loss vs. Frequency

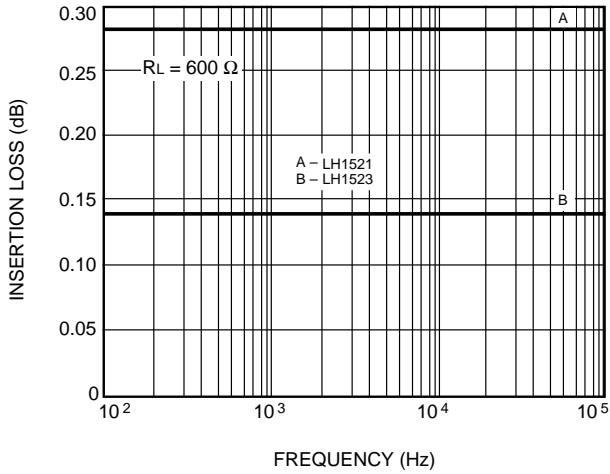


B. Leakage Current vs. Applied Voltage @ 25°C

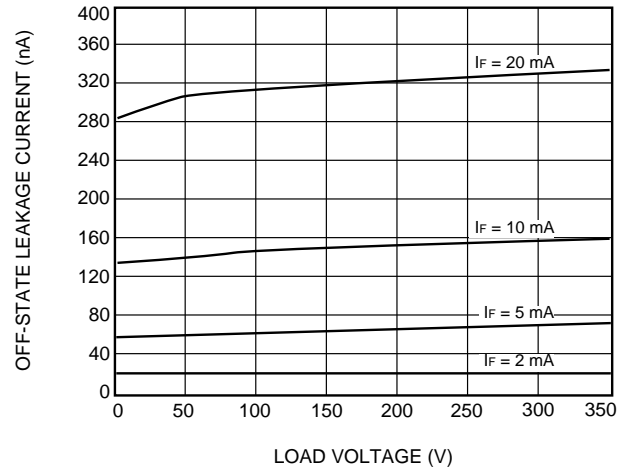


C. Leakage Current vs. Applied Voltage @ 50°C

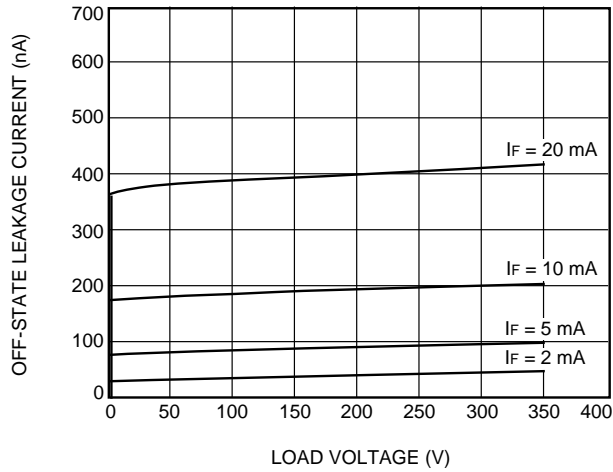


D. Leakage Current vs. Applied Voltage @ 70°C

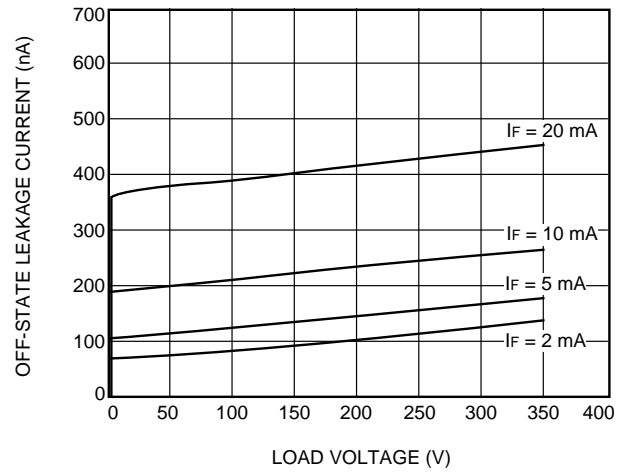


E. Leakage Current vs. Applied Voltage @ 85°C

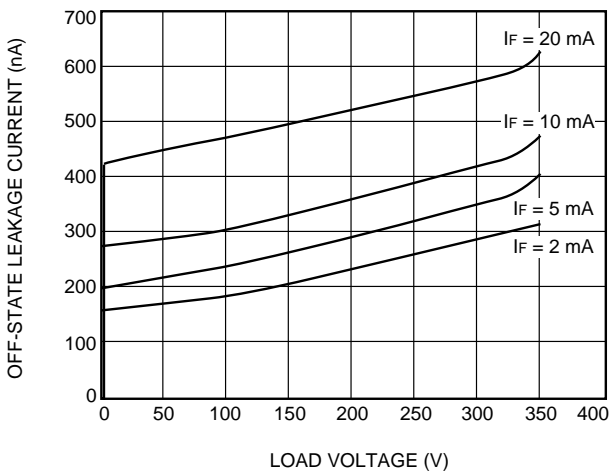


F. Switch Breakdown Voltage vs. Temperature

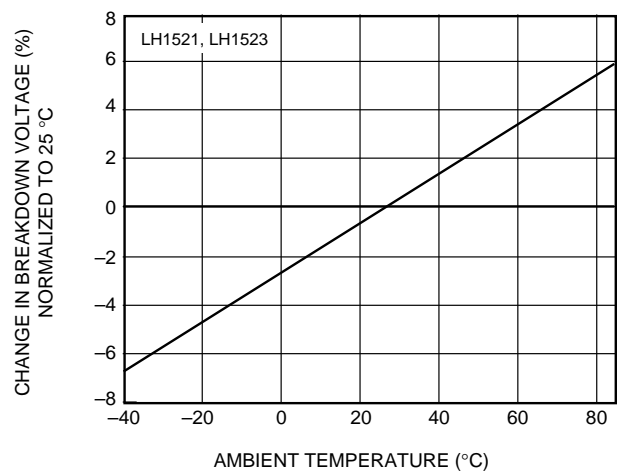


A. Switch Offset Voltage vs. Temperature

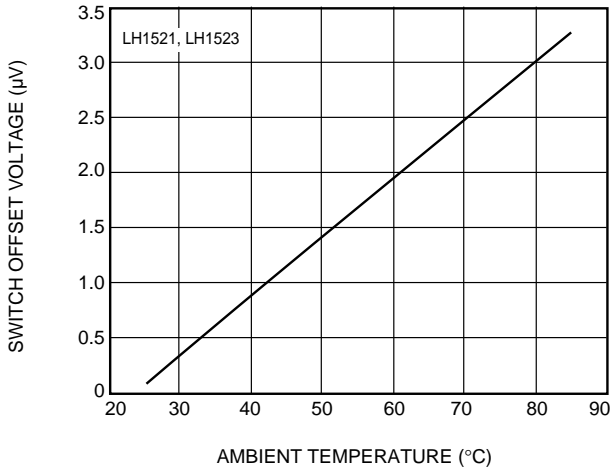


B. Turn-On/Off Time vs. Temperature

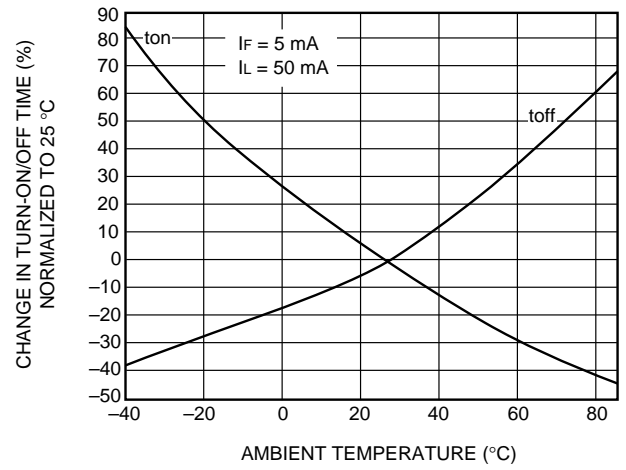

C. Turn-On Time vs. LED Current

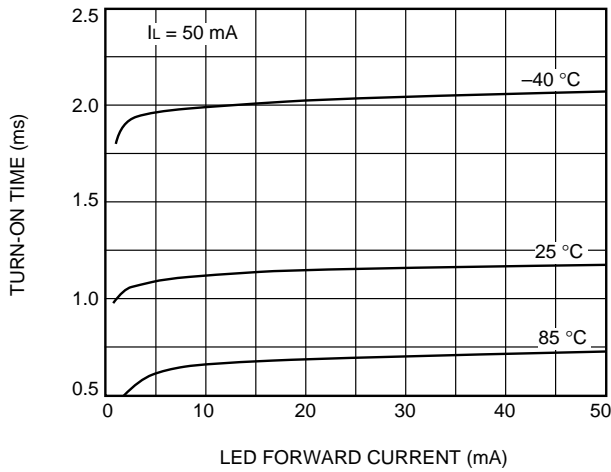

D. Turn-Off Time vs. LED Current

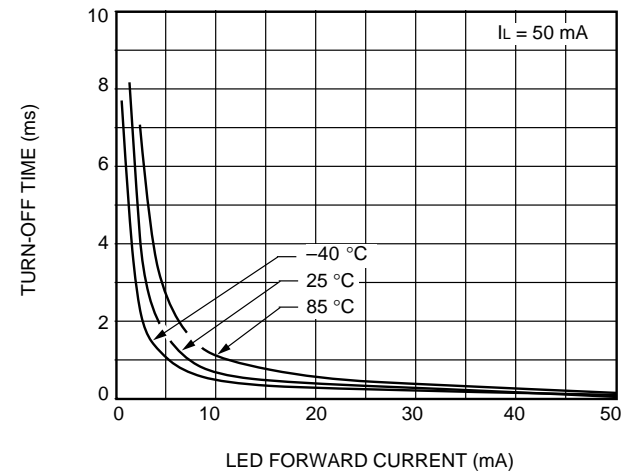

Absolute Maximum Ratings $T_A=25^\circ\text{C}$

Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the




device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to Absolute Maximum Ratings for extended periods of time can adversely affect reliability.

Parameter	Symbol	Test Conditions	LH1502	LH1512	Units	
Ambient Operating Temperature Range	T_A	—	-40 to +85	-40 to +85	$^\circ\text{C}$	
Storage Temperature Range	T_{stg}	—	-40 to +150	-40 to +150	$^\circ\text{C}$	
Pin Soldering Temperature	T_S	$t=10\text{ s max}$	260	260	$^\circ\text{C}$	
Input/Output Isolation Test Voltage	V_{ISO}	$t=1\text{ s}$ $I_{\text{ISO}}=10\ \mu\text{A max}$	5300	5300	Vrms	
Pole-to-Pole Isolation Voltage* (S1 to S2)	—	Dry air, dust free, at sea level	1600	1600	V	
LED Continuous Forward Current	I_F	—	50	50	mA	
LED Reverse Voltage	V_R	$I_R \leq 10\ \mu\text{A}$	8	8	V	
dc or Peak ac Load Voltage	V_L	$I_L \leq 50\ \mu\text{A}$	350	200	V	
Continuous dc Load Current (Form C operation)	I_L	—	150	200	mA	
Peak Load Current	I_P	$t=100\text{ ms}$	Form A	†	†	mA
		(single shot)	Form B	400	600	mA
Output Power Dissipation (continuous)	P_{DISS}	—	600	600	mW	

* Breakdown occurs between the output pins external to the package.

† Refer to Current-Limit Performance application note for a discussion on relay operation during transient currents.

Recommended Operating Conditions

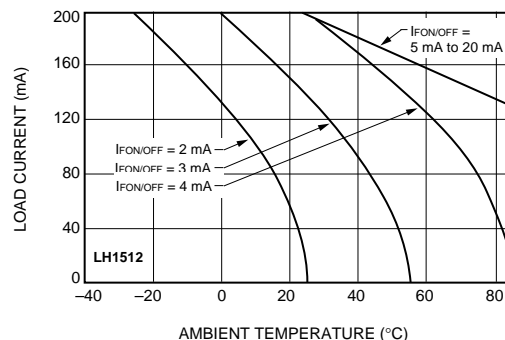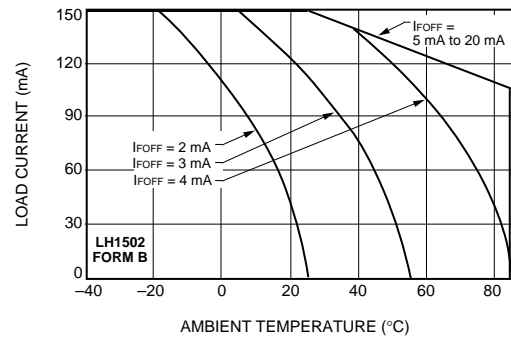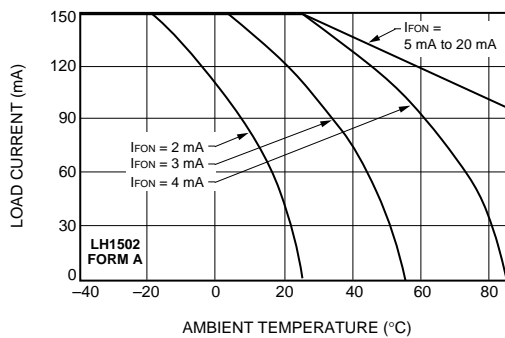

Electrical Characteristics $T_A=25^\circ\text{C}$


Minimum and maximum values are testing requirements. Typical values are characteristics of the device

and are the result of engineering evaluations. Typical values are for information purposes only and are not part of the testing requirement.


	Parameter	Symbol	Test Condition	Values	LH1502	LH1512	Units	
I N P U T	LED Forward Current for Switch Turn-on (NO)	I_{Fon}	$I_L=100\text{ mA}$ $t=10\text{ ms}$	Min	—	—	mA	
				Typ	0.6	0.6	mA	
				Max	2.0	2.0	mA	
	LED Forward Current for Switch Turn-off (NO)	I_{Foff}	—	Min	0.2	0.2	mA	
				Typ	0.5	0.5	mA	
				Max	—	—	mA	
	LED Forward Current for Switch Turn-on (NC)	I_{Fon}	$I_L=100\text{ mA}$ $t=10\text{ ms}$	V_L	\pm	300	150	V
				Min	0.2	0.2	mA	
				Typ	0.9	0.9	mA	
	LED Forward Current for Switch Turn-off (NC)	I_{Foff}	—	Min	—	—	mA	
				Typ	1.0	1.0	mA	
				Max	2.0	2.0	mA	
	LED Forward Voltage	V_F	$I_F=10\text{ mA}$	V_L	\pm	300	150	V
				Min	1.15	1.15	V	
				Typ	1.26	1.26	V	
O U T P U T	ON-resistance: (NO, NC)	R_{ON}	$I_F=5\text{ mA (NO)}$, 0 mA (NC) $I_L=50\text{ mA (NC)}$	Min	12	6	Ω	
				Typ	20	10	Ω	
				Max	25	15	Ω	
	OFF-resistance (NO) (NC)	R_{OFF}	$I_F=0\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	0.5	0.5	G Ω	
				Typ	5000	5000	G Ω	
				Max	—	—	G Ω	
			$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	0.1	0.1	G Ω	
				Typ	1.4	1.4	G Ω	
				Max	—	—	G Ω	
	Current Limit (NO)	I_{LMT}	$I_F=5\text{ mA}$ $t=5\text{ ms}$	Min	230	300	mA	
				Typ	270	360	mA	
				Max	370	460	mA	
				V_L	\pm	6	5	V
	Off-state Leakage Current (NO) (NC)	—	$I_F=0\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	—	—	nA	
				Typ	0.02	0.02	nA	
Max				200	200	nA		
$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$			Min	—	—	μA		
			Typ	0.07	0.07	μA		
			Max	1.0	1.0	μA		
$I_F=0\text{ mA (NO)}$ $I_F=5\text{ mA (NC)}$			Min	—	—	μA		
			Typ	—	—	μA		
			Max	1.0	1.0	μA		
			V_L	\pm	350	200	V	
Output Capacitance (NO) (NC)	—	$I_F=0\text{ mA}$ $V_L=1\text{ V}$	Min	—	—	pF		
			Typ	55	60	pF		
			Max	—	—	pF		
		$I_F=0\text{ mA}$ $V_L=50\text{ V}$	Min	—	—	pF		
			Typ	10	15	pF		
			Max	—	—	pF		
		$I_F=5\text{ mA}$ $V_L=1\text{ V}$	Min	—	—	pF		
			Typ	35	45	pF		
			Max	—	—	pF		
		$I_F=5\text{ mA}$ $V_L=50\text{ V}$	Min	—	—	pF		
			Typ	10	15	pF		
			Max	—	—	pF		
Pole-to-pole Capacitance (S1 to S2)	—	$I_F=0\text{ mA}$	Min	—	—	pF		
			Typ	0.5	0.5	pF		
			Max	—	—	pF		
Switch Offset (NO)	—	$I_F=5\text{ mA (NO)}$ $I_F=5\text{ mA (NC)}$	Min	—	—	μV		
			Typ	0.15	0.15	μV		
			Max	—	—	μV		
Switch Offset (NC)	—	$I_F=0\text{ mA (NC)}$ $I_F=5\text{ mA (NO)}$	Min	—	—	μV		
			Typ	0.1	0.1	μV		
			Max	—	—	μV		

	Parameter	Symbol	Test Condition	Values	LH1502	LH1512	Units
T R A N S F E R	Input/Output Capacitance	C_{ISO}	$V_{ISO}=1\text{ V}$	Min	—	—	pF
				Typ	1.1	1.1	pF
				Max	—	—	pF
	Turn-on Time (NO)	t_{on}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	1.4	ms
				Max	NA	3.0	ms
	Turn-on Time (NC)	t_{on}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	1.2	ms
				Max	NA	3.0	ms
	Turn-off Time (NO)	t_{off}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	0.7	ms
				Max	NA	3.0	ms
	Turn-off Time (NC)	t_{off}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	2.0	ms
				Max	NA	3.0	ms
	Turn-on Time (NO)	t_{on}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	1.0	NA	ms
				Typ	3.2	NA	ms
				Max	6.0	NA	ms
	Turn-on Time (NC)	t_{on}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	1.0	NA	ms
				Typ	3.8	NA	ms
				Max	6.0	NA	ms
Turn-off Time (NO)	t_{off}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	—	NA	ms	
			Typ	1.6	NA	ms	
			Max	3.0	NA	ms	
Turn-off Time (NC)	t_{off}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	—	NA	ms	
			Typ	0.8	NA	ms	
			Max	3.0	NA	ms	
Transfer OFF Time (NC off to NO on)	ttfr	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	0	NA	μs	
			Typ	800	NA	μs	
			Max	—	NA	μs	
Transfer OFF Time (NO off to NC on)	ttfr	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	0	NA	μs	
			Typ	1500	NA	μs	
			Max	—	NA	μs	


A. LED Voltage vs. Temperature

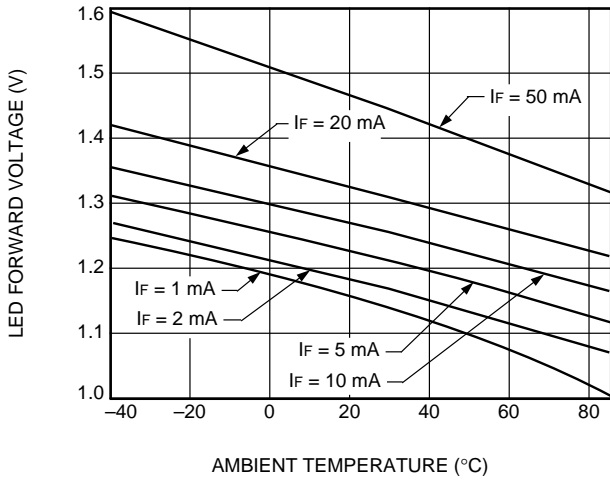


B. LED Dropout Voltage vs. Temperature

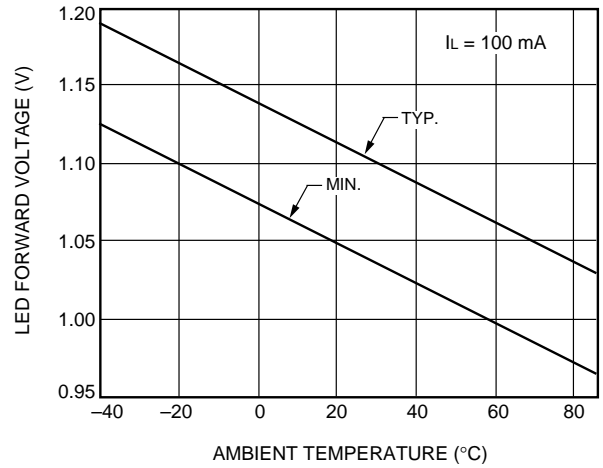


C. LED Current for Switch Turn-Off vs. Temperature

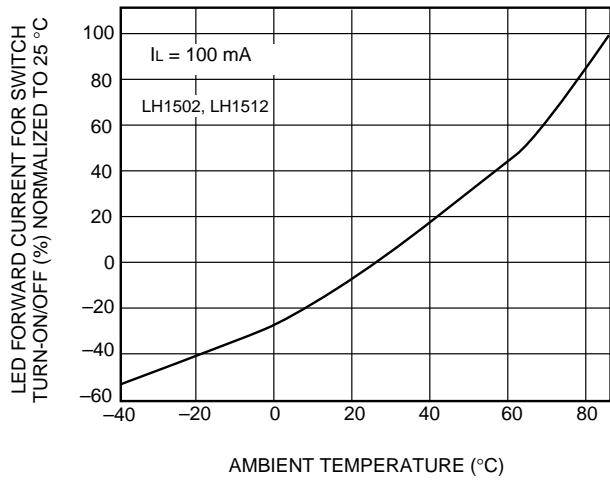


D. Current Limit vs. Temperature

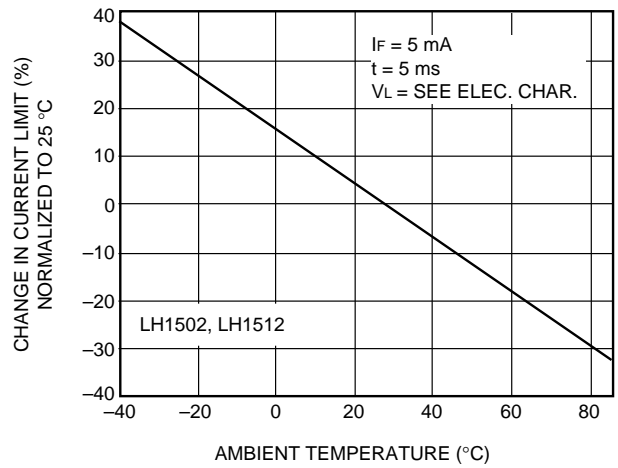


E. ON-Resistance vs. Temperature

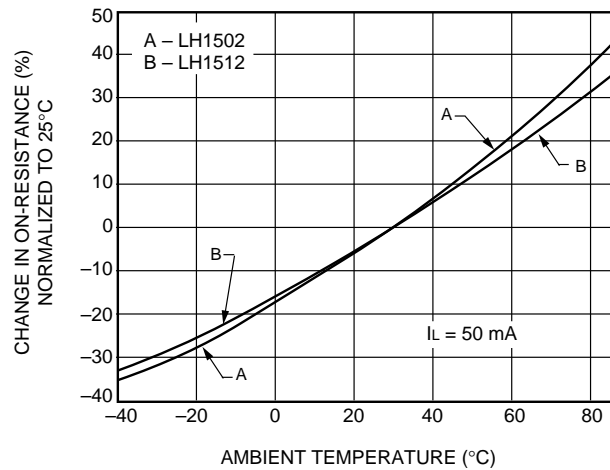


F. Variation in ON-Resistance vs. LED Current

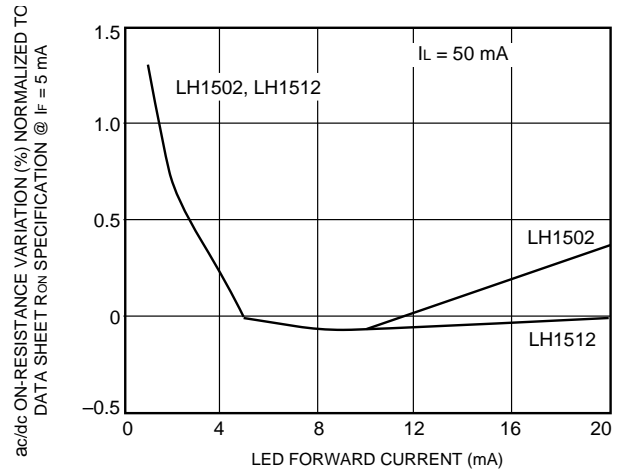


A. Switch Capacitance vs. Applied Voltage

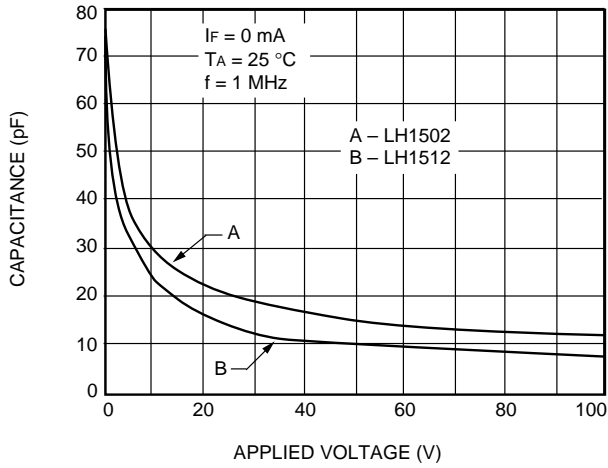


B. Insertion Loss vs. Frequency

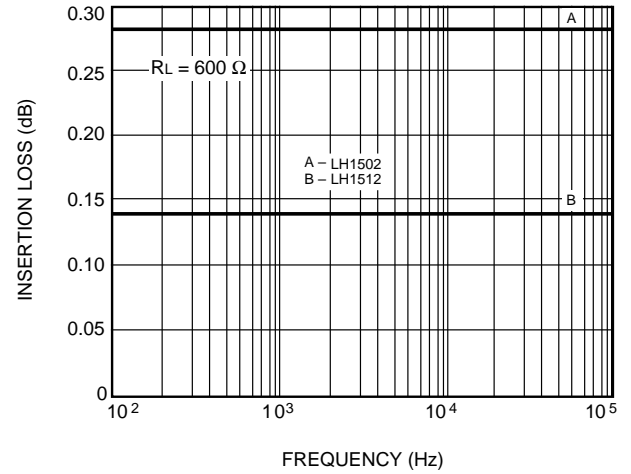


C. NO Output Isolation

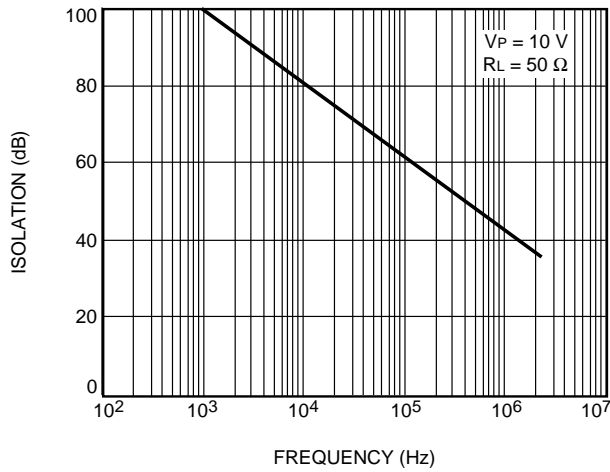


D. NC Output Isolation

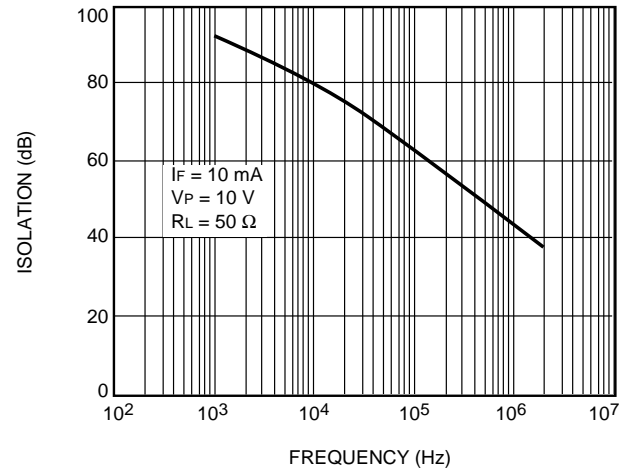


E. NO Leakage Current vs. Applied Voltage

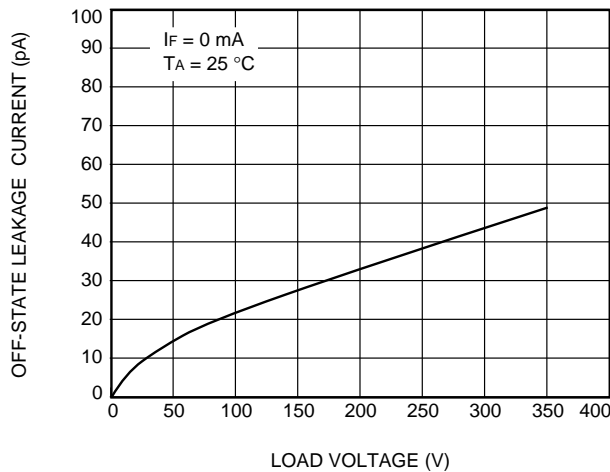


F. NO Leakage Current vs Applied Voltage @ Elevated Temperatures

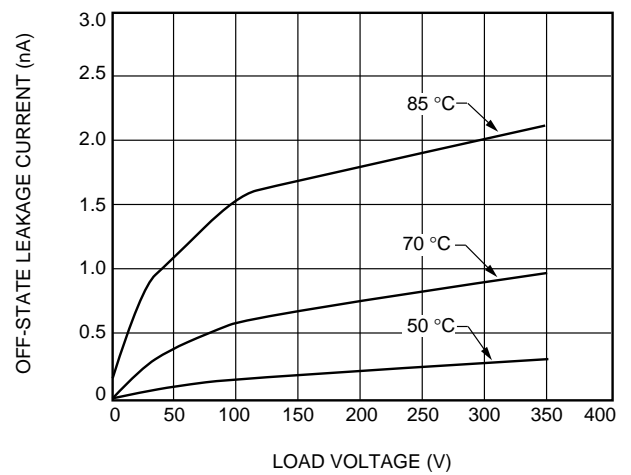


A. NC Leakage Current vs. Applied voltage @ 25°C

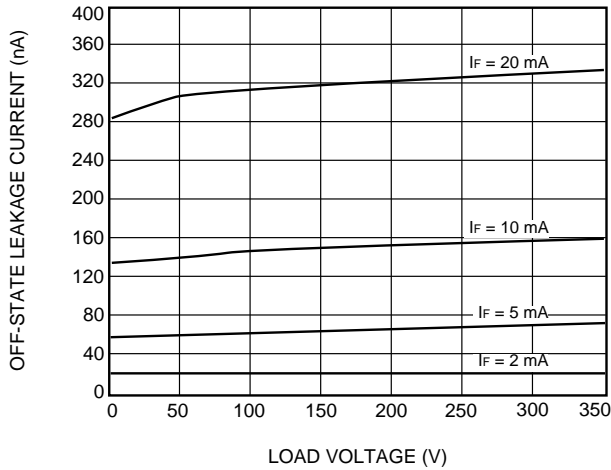


B. NC Leakage Current vs. Applied voltage @ 50°C

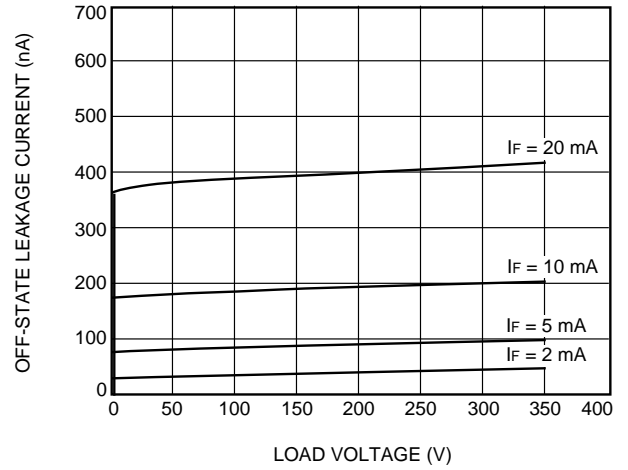


C. NC Leakage Current vs. Applied voltage @ 70°C

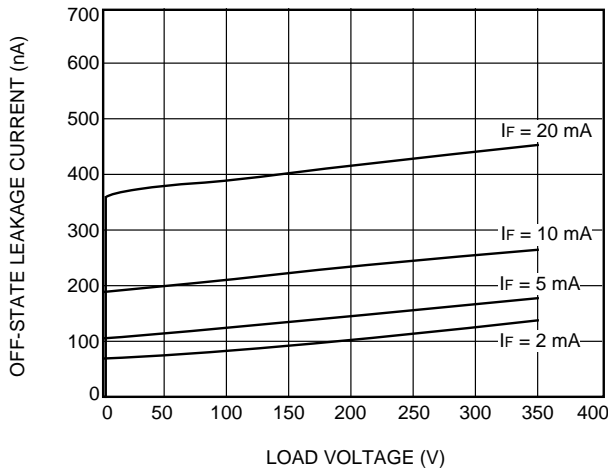


D. NC Leakage Current vs. Applied voltage @ 85°C

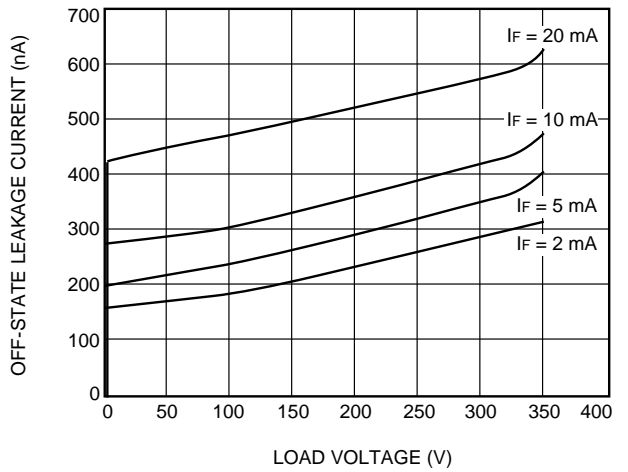


E. Switch Breakdown Voltage vs. Temperature

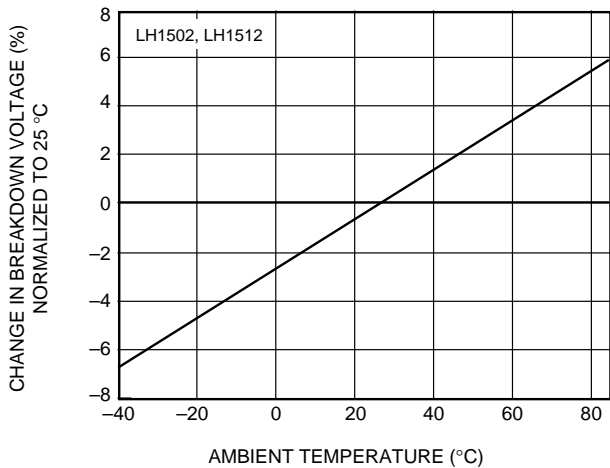


F. Switch Offset Voltage vs. Temperature

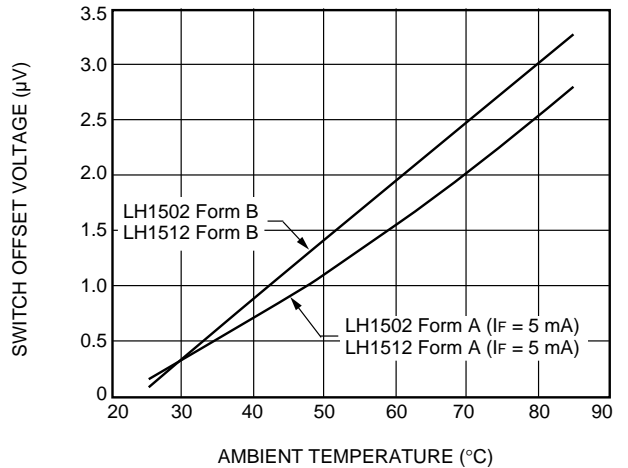


A. NO Switch Offset Voltage vs. LED Current

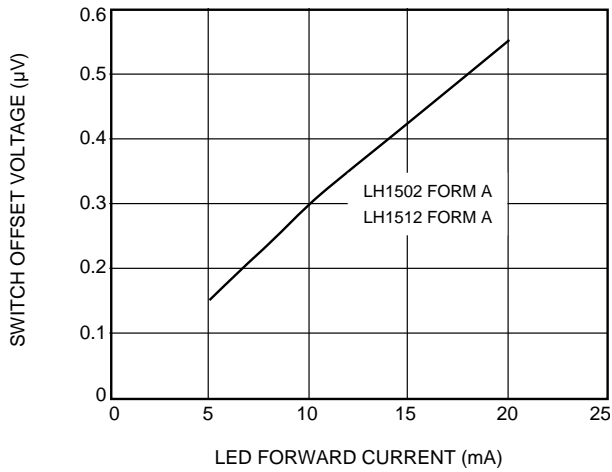


B. NO Turn-On Time vs. Temperature

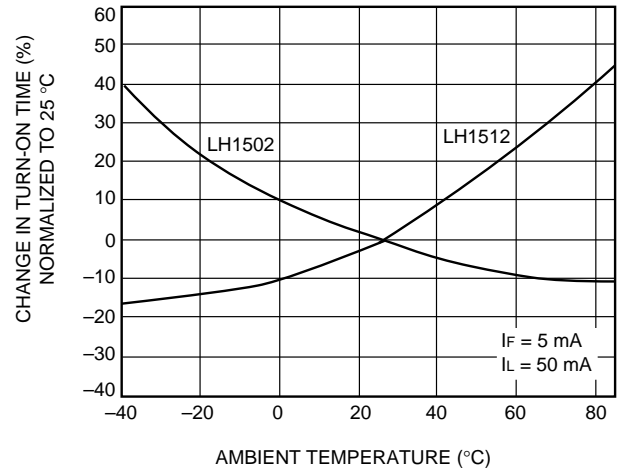


C. NO Turn-Off Time vs. Temperature

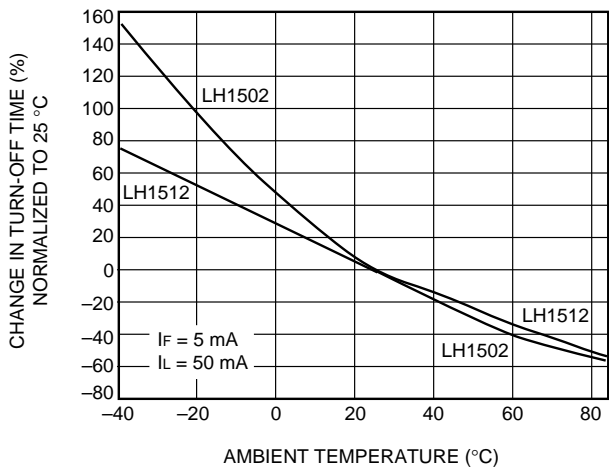


D. NC Turn-On/Off Time vs. Temperature

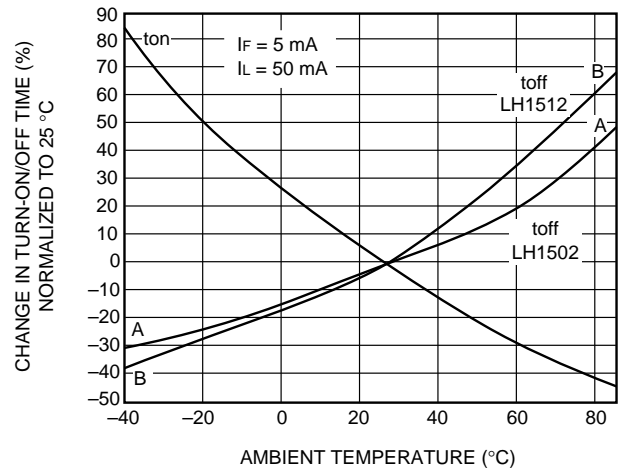


E. NO Turn-On Time vs. LED Current (LH1512)

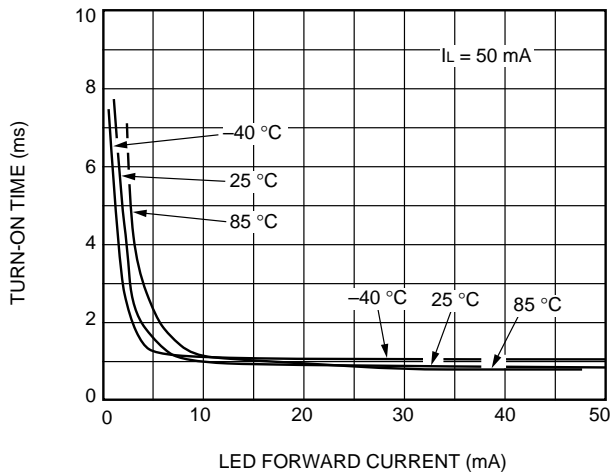


F. NC Turn-On Time vs. LED Current (LH1512)

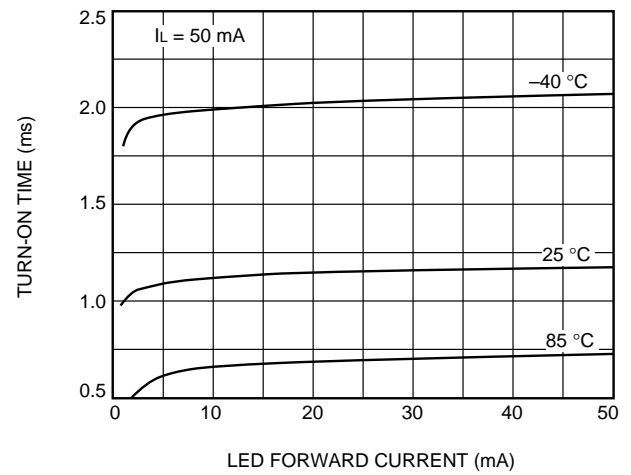


A. NO Turn-Off Time vs. LED Current (LH1512)

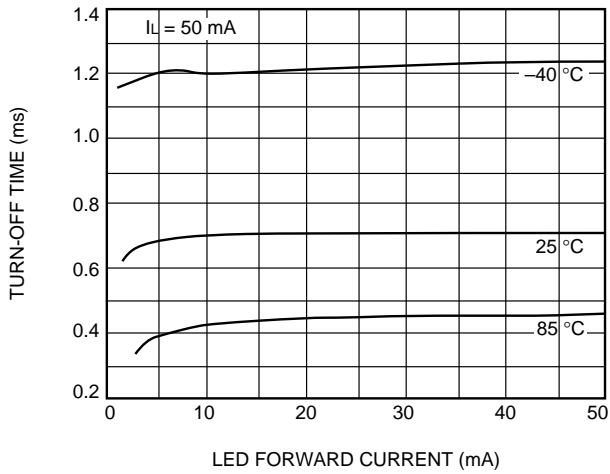

B. NC Turn-Off Time vs. LED Current (LH1512)

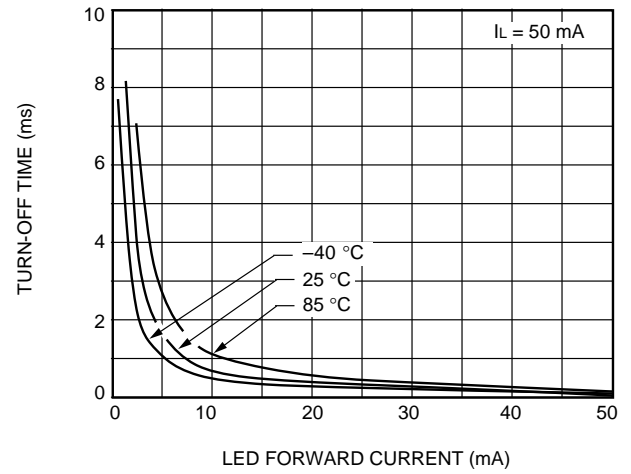

C. NC Turn-Off and NO Turn-ON Time vs. LED Current (LH1502)

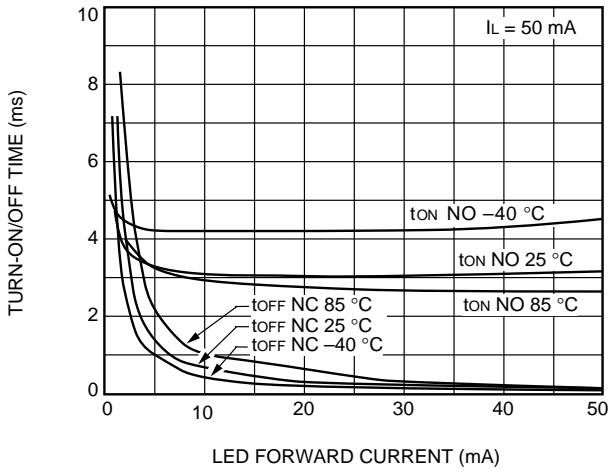

D. NO Turn-Off and NC Turn-ON Time vs. LED Current (LH1502)

