

Loose Tube Cable - SJNA

Single Jacket Non-Armored



Loose Tube Cable - SJNA
LN30


Description

SAMSUNG Single Jacket Non-Armored cables are lightweight with small diameter and designed for duct and aerial installation with lashing method. The loose tube design with a metallic strength member for LN30 or an aluminum tape for LN15 provides stable performance over a wide temperature range and is compatible with any telecommunication grade optical fiber.

Feature / Benefit

- Up to 432 fibers
- Proven loose tube design for performance
- SZ stranding design allows for easy mid-span access and isolate fibers from installation and environmental rigors
- Drycore design for excellent water blocking performance and easier handling
- Small diameter and lightweight
- Polyethylene jacket is easy to strip, rugged and durable
- Designed in accordance with applicable industry technical specifications, standards and references including IEC and EN
- Moisture barrier with aluminum/polymer laminated tape (LN15)

Cable Drawing

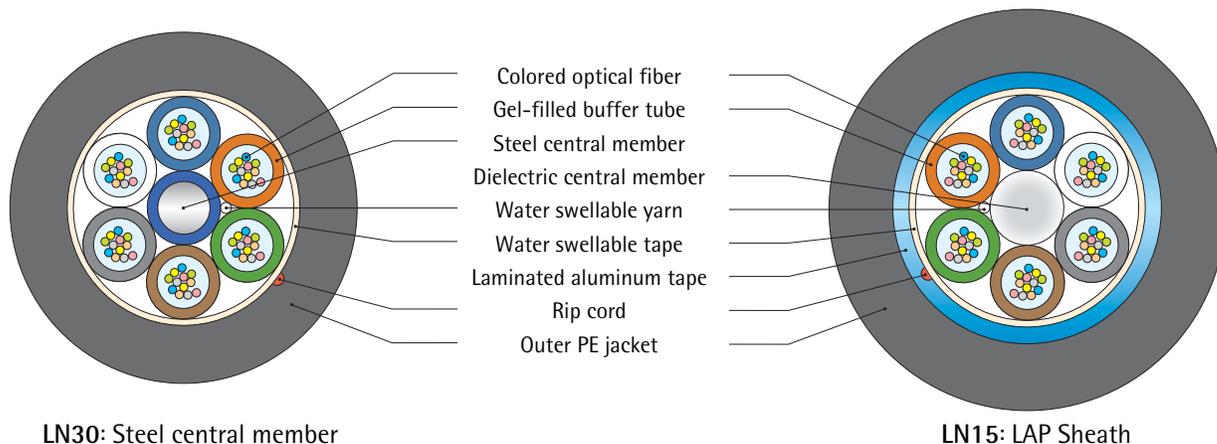

* Drawings are not to scale

Mechanical Performance

Crush resistance : 2,000 N/10 cm
 Temperature : - Operation/Storage : -40 ~ +70 °C
 - Installation : -20 ~ +70 °C

LN30

Characteristics	Fiber Count							
	Unit	2 ~ 36	2 ~ 48	2 ~ 72	96	96	144	288
Tube type (fibers per tube)	-	B(6)	C(8)	D(12)	C(8)	D(12)	D(12)	D(12)
Nominal outer diameter	mm	10.4	10.4	10.4	14.4	11.7	14.6	17.1
Nominal cable weight	kg/km	98	98	99	173	120	182	237
Maximum tensile load	N	2700	2700	2700	3400	2700	3600	4000
Minimum bending radius								
- Short term [Loaded] : 15*OD	mm	156	156	156	216	176	219	257
- Long term [Installed]: 10*OD	mm	104	104	104	144	117	146	171

LN15

Characteristics	Fiber Count							
	Unit	2 ~ 36	2 ~ 48	2 ~ 72	96	96	144	288
Tube type (fibers per tube)	-	B(6)	C(8)	D(12)	C(8)	D(12)	D(12)	D(12)
Nominal outer diameter	mm	10.8	10.8	10.8	15.0	12.3	15.2	17.7
Nominal cable weight	kg/km	99	99	99	185	128	195	253
Maximum tensile load	N	1500	1500	1500	2700	2000	3000	3500
Minimum bending radius								
- Short term [Loaded] : 15*OD	mm	162	162	162	225	185	228	266
- Long term [Installed]: 10*OD	mm	108	108	108	150	123	152	177

* Tested in accordance with IEC 60794-1

Note

- Fiber colors by IEC60304: Blue/Orange/Green/Brown/Grey/White/Red/Black/Yellow/Violet/Pink/Aqua
- Diameter represents a nominal value and may vary by $\pm 5\%$.
- Sheath marking legend: hot foil stamp(indented)

Ex) Manufacturing year (ex. 2003) SAMSUNG SJNA SM 24 = length marking =

Ordering

LN30 - - -
 LN15

<input type="text"/>	Fiber count	002~432
<input type="text"/>	Tube type	A 4 fibers B 6 fibers C 8 fibers D 12 fibers
<input type="text"/>	Fiber type	S Single mode: Max. 0.38/0.25 dB/km @ 1310/1550 nm M 50/125 μ m: Max. 3.0/1.0 dB/km, 500/500 Mhz-km @ 850/1300 nm L 62.5/125 μ m: Max. 3.5/1.5 dB/km, 200/500 Mhz-km @ 850/1300 nm U NZ-DSF: Max. 0.25 dB/km @ 1550 nm

Samsung Electronics reserves the right to improve, enhance and modify the features and specifications of Samsung Electronics fiber optic products without prior notification.

Samsung Electronics Fiberoptics Division
 7th Floor, Samsung Main Building 250, 2-Ga, Taepyung-Ro, Chung-Gu, Seoul, Korea 100-742
 Tel: +82-2-751-3538 Fax: +82-2-751-2687
 e-mail: fiberoptics@samsung.com