
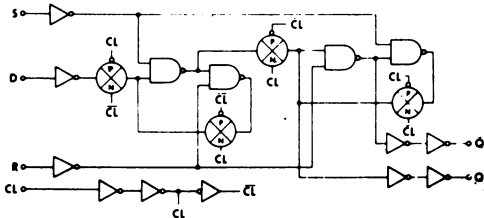




SCL4013B

DUAL D TYPE FLIP FLOP



SCL4027B

DUAL JK TYPE FLIP FLOP

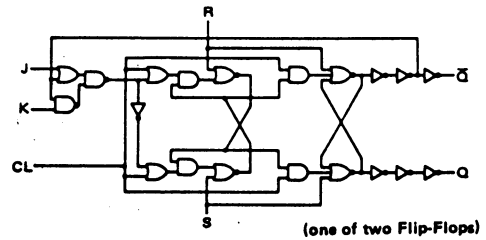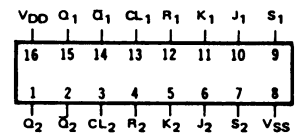

STATIC CHARACTERISTICS: (V_{SS} = 0 V)


PARAMETER	CONDITIONS	V _{DD} (Vdc)	T _{LOW} * MAX		+25°C TYP			T _{HIGH} ** MAX		UNIT
			MIN	MAX	MIN	TYP	MAX	MIN	MAX	
QUIESCENT DEVICE CURRENT I _{DD}	V _{IN} = V _{SS} OR V _{DD}	5		1	0.005	1		30	μA dc	
		10		2	0.01	2		60		
		15		4	0.02	4		120		

Note: *T_{LOW} = -55°C for C / H devices, -40°C for E / S devices, **T_{HIGH} = +125°C for C / H devices, +85°C for E / S devices.


DYNAMIC CHARACTERISTICS: (CL = 50pF, TA = 25°C)

PARAMETER	V _{DD} (Vdc)	MINIMUM	TYPICAL	MAXIMUM	UNIT
PROPAGATION DELAY TIME t _{PLH} , t _{PHL}	5		125	250	ns
	10		65	130	
	15		45	90	
PROPAGATION DELAY TIME t _{PLH} , t _{PHL}	5		150	300	ns
	10		65	130	
	15		50	100	
OUTPUT TRANSITION TIME t _{TLH} , t _{THL}	5		100	200	ns
	10		50	100	
	15		40	80	
CLOCK PULSE WIDTH MINIMUM PW _{CL}	5		70	140	ns
	10		30	60	
	15		20	40	
CLOCK PULSE WIDTH MINIMUM PW _{CL}	5		165	330	ns
	10		60	120	
	15		50	100	
MAXIMUM CLOCK FREQUENCY f _{CL}	5	4	7		MHz
	10	8	16		
	15	12.5	25		
MAXIMUM CLOCK FREQUENCY f _{CL}	5	1.5	3		MHz
	10	4	8		
	15	5	10		

BLOCK DIAGRAM SCL4013B



SCL4027B



SCL4013B
DUAL D TYPE FLIP FLOP

SCL4027B
DUAL JK TYPE FLIP FLOP


DYNAMIC CHARACTERISTICS: (CL = 50pF, TA = 25°C)

PARAMETER	V _{DD} V _{dc}	MINIMUM	TYPICAL	MAXIMUM	UNIT
CLOCK RISE & FALL TIME MAXIMUM t _{rCL} , t _{fCL} SCL4013B	5	15			μs
	10	10			
	15	5			
CLOCK RISE & FALL TIME MAXIMUM t _{rCL} , t _{fCL} SCL4027B	5	15			μs
	10	5			
	15	3			
MINIMUM SETUP TIME t _{set} SCL4013B	5		25	50	ns
	10		10	20	
	15		7.5	12	
MINIMUM SETUP TIME t _{set} SCL4027B	5		100	200	ns
	10		50	100	
	15		40	80	
MINIMUM HOLD TIME t _{hold} SCL4013B	5		0	25	ns
	10		0	15	
	15		0	10	
MINIMUM HOLD TIME t _{hold} SCL4027B	5		-25	0	ns
	10		-10	0	
	15		-5	0	


SET AND RESET

PROPAGATION DELAY TIME S to Q, R to Q t _{PLH} SCL4013B	5		125	250	ns
	10		65	130	
	15		45	90	
PROPAGATION DELAY TIME S to Q, R to Q t _{PLH} SCL4027B	5		150	300	ns
	10		65	130	
	15		50	100	
MINIMUM SET & RESET PULSE WIDTH PW _S , PW _R SCL4013B	5		65	130	ns
	10		30	60	
	15		25	50	
MINIMUM SET & RESET PULSE WIDTH PW _S , PW _R SCL4027B	5		100	200	ns
	10		50	100	
	15		40	80	
SET & RESET REMOVAL TIME t _{rem}	5		0	25	ns
	10		0	10	
	15		0	5	

**DIE DRAWING
SCL4013B
44 x 51 mils**



**DIE DRAWING
SCL4027B
49 x 68 mils**

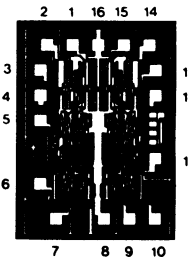

Note: Refer to "SCL4000B SERIES FAMILY SPECIFICATIONS" for remaining Dynamic & Static Characteristics, and, for recommended and maximum operating conditions.