




## PIN CONFIGURATION

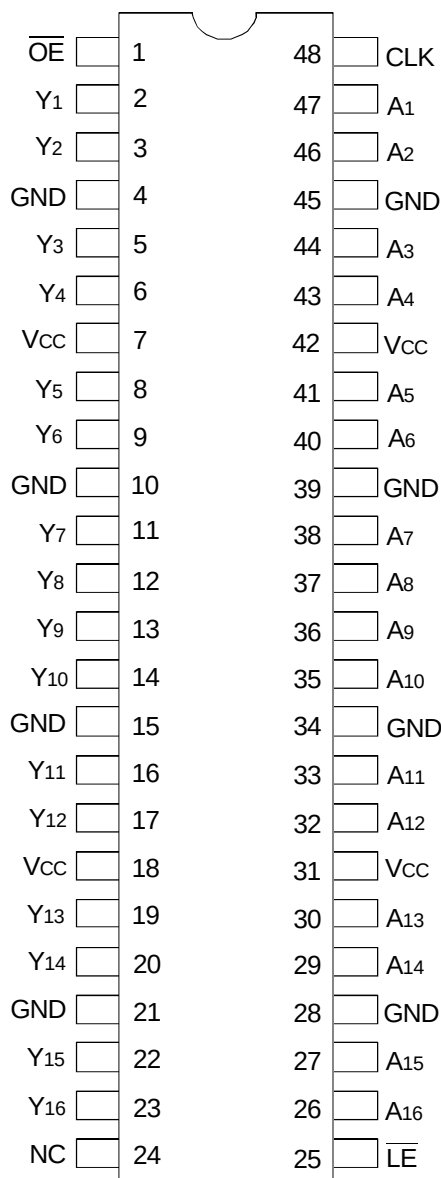

SSOP/ TSSOP/ TVSOP  
TOP VIEW

## PIN DESCRIPTION

| Pin Names       | Description                               |
|-----------------|-------------------------------------------|
| $\overline{OE}$ | 3-State Output Enable Inputs (Active LOW) |
| CLK             | Register Input Clock                      |
| $\overline{LE}$ | Latch Enable (Transparent LOW)            |
| Ax              | Data Inputs                               |
| Yx              | 3-State Outputs                           |
| NC              | No Internal Connection                    |

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                             | Description                                                          | Max             | Unit |
|------------------------------------|----------------------------------------------------------------------|-----------------|------|
| VTERM <sup>(2)</sup>               | Terminal Voltage with Respect to GND                                 | -0.5 to +4.6    | V    |
| VTERM <sup>(3)</sup>               | Terminal Voltage with Respect to GND                                 | -0.5 to VCC+0.5 | V    |
| TSTG                               | Storage Temperature                                                  | -65 to +150     | °C   |
| IOUT                               | DC Output Current                                                    | -50 to +50      | mA   |
| I <sub>IK</sub>                    | Continuous Clamp Current, V <sub>I</sub> < 0 or V <sub>I</sub> > VCC | ±50             | mA   |
| I <sub>OK</sub>                    | Continuous Clamp Current, V <sub>O</sub> < 0                         | -50             | mA   |
| I <sub>CC</sub><br>I <sub>SS</sub> | Continuous Current through each VCC or GND                           | ±100            | mA   |

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- VCC terminals.
- All terminals except VCC.

## CAPACITANCE (T<sub>A</sub> = +25°C, F = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 5    | 7    | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 7    | 9    | pF   |
| C <sub>OUT</sub> | I/O Port Capacitance     | V <sub>IN</sub> = 0V  | 7    | 9    | pF   |

### NOTE:

- As applicable to the device type.

## FUNCTION TABLE<sup>(1)</sup>

| Inputs          |                 |        |    | Outputs                       |
|-----------------|-----------------|--------|----|-------------------------------|
| $\overline{OE}$ | $\overline{LE}$ | CLK    | Ax | Yx                            |
| H               | X               | X      | X  | Z                             |
| L               | L               | X      | L  | L                             |
| L               | L               | X      | H  | H                             |
| L               | H               | ↑      | L  | L                             |
| L               | H               | ↑      | H  | H                             |
| L               | H               | L or H | X  | Y <sub>0</sub> <sup>(2)</sup> |

### NOTES:

- H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
Z = High Impedance  
↑ = LOW-to-HIGH transition
- Output level before the indicated steady-state input conditions were established.

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol                              | Parameter                                              | Test Conditions                                                                |                    | Min. | Typ. <sup>(1)</sup> | Max.     | Unit          |
|-------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------|--------------------|------|---------------------|----------|---------------|
| $V_{IH}$                            | Input HIGH Voltage Level                               | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                                        |                    | 1.7  | —                   | —        | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                                        |                    | 2    | —                   | —        |               |
| $V_{IL}$                            | Input LOW Voltage Level                                | $V_{CC} = 2.3\text{V}$ to $2.7\text{V}$                                        |                    | —    | —                   | 0.7      | V             |
|                                     |                                                        | $V_{CC} = 2.7\text{V}$ to $3.6\text{V}$                                        |                    | —    | —                   | 0.8      |               |
| $I_{IH}$                            | Input HIGH Current                                     | $V_{CC} = 3.6\text{V}$                                                         | $V_I = V_{CC}$     | —    | —                   | $\pm 5$  | $\mu\text{A}$ |
| $I_{IL}$                            | Input LOW Current                                      | $V_{CC} = 3.6\text{V}$                                                         | $V_I = \text{GND}$ | —    | —                   | $\pm 5$  | $\mu\text{A}$ |
| $I_{OZH}$                           | High Impedance Output Current<br>(3-State Output pins) | $V_{CC} = 3.6\text{V}$                                                         | $V_O = V_{CC}$     | —    | —                   | $\pm 10$ | $\mu\text{A}$ |
| $I_{OZL}$                           |                                                        |                                                                                | $V_O = \text{GND}$ | —    | —                   | $\pm 10$ |               |
| $V_{IK}$                            | Clamp Diode Voltage                                    | $V_{CC} = 2.3\text{V}$ , $I_{IN} = -18\text{mA}$                               |                    | —    | -0.7                | -1.2     | V             |
| $V_H$                               | Input Hysteresis                                       | $V_{CC} = 3.3\text{V}$                                                         |                    | —    | 100                 | —        | mV            |
| $I_{CCL}$<br>$I_{CCH}$<br>$I_{CCZ}$ | Quiescent Power Supply Current                         | $V_{CC} = 3.6\text{V}$<br>$V_{IN} = \text{GND}$ or $V_{CC}$                    |                    | —    | 0.1                 | 40       | $\mu\text{A}$ |
| $\Delta I_{CC}$                     | Quiescent Power Supply Current Variation               | One input at $V_{CC} - 0.6\text{V}$ , other inputs at $V_{CC}$ or $\text{GND}$ |                    | —    | —                   | 750      | $\mu\text{A}$ |

**NOTE:**

1. Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.

## OUTPUT DRIVE CHARACTERISTICS

| Symbol   | Parameter           | Test Conditions <sup>(1)</sup>          |                          | Min.           | Max. | Unit |
|----------|---------------------|-----------------------------------------|--------------------------|----------------|------|------|
| $V_{OH}$ | Output HIGH Voltage | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OH} = -0.1\text{mA}$ | $V_{CC} - 0.2$ | —    | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OH} = -6\text{mA}$   | 2              | —    |      |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OH} = -12\text{mA}$  | 1.7            | —    |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  |                          | 2.2            | —    |      |
|          |                     | $V_{CC} = 3\text{V}$                    |                          | 2.4            | —    |      |
|          |                     | $V_{CC} = 3\text{V}$                    | $I_{OH} = -24\text{mA}$  | 2              | —    |      |
| $V_{OL}$ | Output LOW Voltage  | $V_{CC} = 2.3\text{V}$ to $3.6\text{V}$ | $I_{OL} = 0.1\text{mA}$  | —              | 0.2  | V    |
|          |                     | $V_{CC} = 2.3\text{V}$                  | $I_{OL} = 6\text{mA}$    | —              | 0.4  |      |
|          |                     |                                         | $I_{OL} = 12\text{mA}$   | —              | 0.7  |      |
|          |                     | $V_{CC} = 2.7\text{V}$                  | $I_{OL} = 12\text{mA}$   | —              | 0.4  |      |
|          |                     | $V_{CC} = 3\text{V}$                    | $I_{OL} = 24\text{mA}$   | —              | 0.55 |      |

**NOTE:**

1.  $V_{IH}$  and  $V_{IL}$  must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate  $V_{CC}$  range.  
 $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

## OPERATING CHARACTERISTICS, $T_A = 25^\circ\text{C}$

| Symbol | Parameter                                      | Test Conditions     | Vcc = 2.5V ± 0.2V | Vcc = 3.3V ± 0.3V | Unit |
|--------|------------------------------------------------|---------------------|-------------------|-------------------|------|
|        |                                                |                     | Typical           | Typical           |      |
| CPD    | Power Dissipation Capacitance Outputs enabled  | CL = 0pF, f = 10Mhz | 32                | 37                | pF   |
| CPD    | Power Dissipation Capacitance Outputs disabled |                     | 7                 | 11                |      |

## SWITCHING CHARACTERISTICS<sup>(1)</sup>

| Symbol       | Parameter                                                       | Vcc = 2.5V ± 0.2V |      | Vcc = 2.7V |      | Vcc = 3.3V ± 0.3V |      | Unit |
|--------------|-----------------------------------------------------------------|-------------------|------|------------|------|-------------------|------|------|
|              |                                                                 | Min.              | Max. | Min.       | Max. | Min.              | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>Ax to Yx                                   | 1                 | 3.7  | —          | 3.6  | 1.1               | 3.3  | ns   |
| tPLH<br>tPHL | Propagation Delay<br>$\overline{\text{LE}}$ to Yx               | 1                 | 4.8  | —          | 5    | 1.3               | 4.4  | ns   |
| tPLH<br>tPHL | Propagation Delay<br>CLK to Yx                                  | 1                 | 4.4  | —          | 4.5  | 1                 | 4.1  | ns   |
| tPZH<br>tPZL | Output Enable Time<br>$\overline{\text{OE}}$ to Yx              | 1                 | 5.4  | —          | 5.4  | 1.1               | 4.6  | ns   |
| tPHZ<br>tPLZ | Output Disable Time<br>$\overline{\text{OE}}$ to Yx             | 1                 | 4.1  | —          | 4.5  | 1.7               | 4.4  | ns   |
| tw           | Pulse Duration, $\overline{\text{LE}}$ LOW                      | 3.3               | —    | 3.3        | —    | 3.3               | —    | ns   |
| tw           | Pulse Duration, CLK HIGH or LOW                                 | 3.3               | —    | 3.3        | —    | 3.3               | —    | ns   |
| tsu          | Set-up Time, data before CLK↑                                   | 1.4               | —    | 1.7        | —    | 1.5               | —    | ns   |
| tsu          | Set-up Time, data before $\overline{\text{LE}}$ ↑, CLK HIGH     | 1.2               | —    | 1.6        | —    | 1.3               | —    | ns   |
| tsu          | Set-up Time, data before $\overline{\text{LE}}$ ↑, CLK LOW      | 1.4               | —    | 1.5        | —    | 1.2               | —    | ns   |
| th           | Hold Time, data after CLK↑                                      | 0.9               | —    | 0.8        | —    | 0.9               | —    | ns   |
| th           | Hold Time, data after $\overline{\text{LE}}$ ↑, CLK HIGH or LOW | 1.2               | —    | 1.1        | —    | 1.1               | —    | ns   |
| tsk(O)       | Output Skew <sup>(2)</sup>                                      | —                 | —    | —          | —    | —                 | 500  | ps   |


### NOTES:

- See TEST CIRCUITS AND WAVEFORMS.  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ .
- Skew between any two outputs of the same package and switching in the same direction.

## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol            | V <sub>CC</sub> <sup>(1)</sup> =3.3V±0.3V | V <sub>CC</sub> <sup>(1)</sup> =2.7V | V <sub>CC</sub> <sup>(2)</sup> =2.5V±0.2V | Unit |
|-------------------|-------------------------------------------|--------------------------------------|-------------------------------------------|------|
| V <sub>LOAD</sub> | 6                                         | 6                                    | 2 x V <sub>CC</sub>                       | V    |
| V <sub>IH</sub>   | 2.7                                       | 2.7                                  | V <sub>CC</sub>                           | V    |
| V <sub>T</sub>    | 1.5                                       | 1.5                                  | V <sub>CC</sub> / 2                       | V    |
| V <sub>LZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| V <sub>HZ</sub>   | 300                                       | 300                                  | 150                                       | mV   |
| C <sub>L</sub>    | 50                                        | 50                                   | 30                                        | pF   |

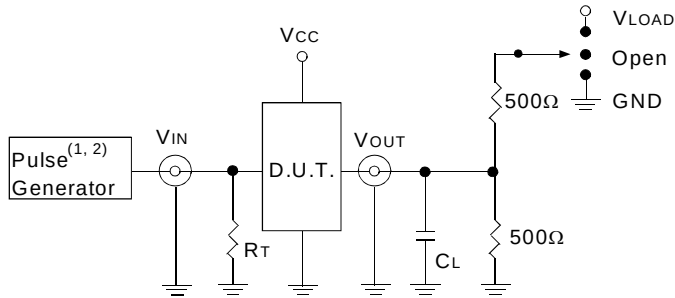

Test Circuit for All Outputs

#### DEFINITIONS:

C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.


R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

#### NOTES:

1. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t<sub>r</sub> ≤ 2.5ns; t<sub>r</sub> ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t<sub>r</sub> ≤ 2ns; t<sub>r</sub> ≤ 2ns.

### SWITCH POSITION

| Test                                    | Switch            |
|-----------------------------------------|-------------------|
| Open Drain<br>Disable Low<br>Enable Low | V <sub>LOAD</sub> |
| Disable High<br>Enable High             | GND               |
| All Other Tests                         | Open              |

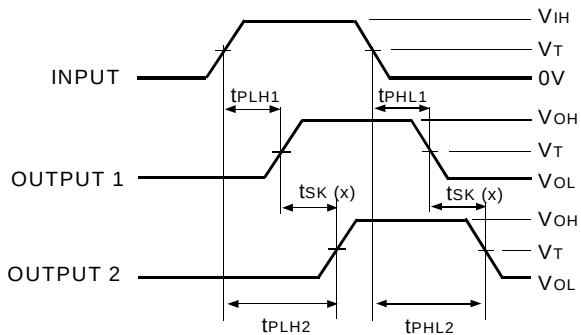


$$tsk(x) = |t_{PLH2} - t_{PLH1}| \text{ or } |t_{PHL2} - t_{PHL1}|$$


Output Skew - tsk(x)

#### NOTES:

1. For tsk(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For tsk(b) OUTPUT1 and OUTPUT2 are in the same bank.

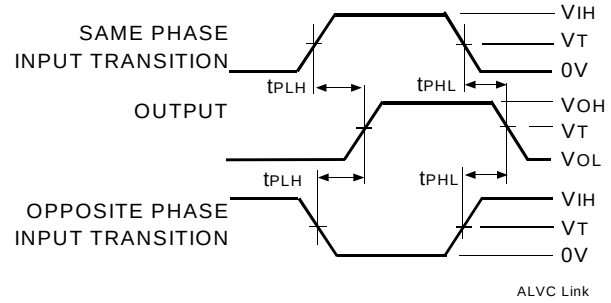


Propagation Delay

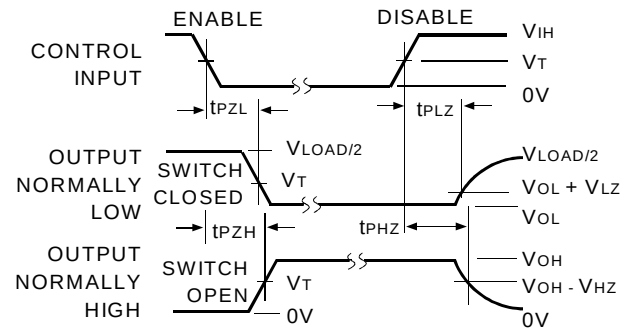


Enable and Disable Times

#### NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

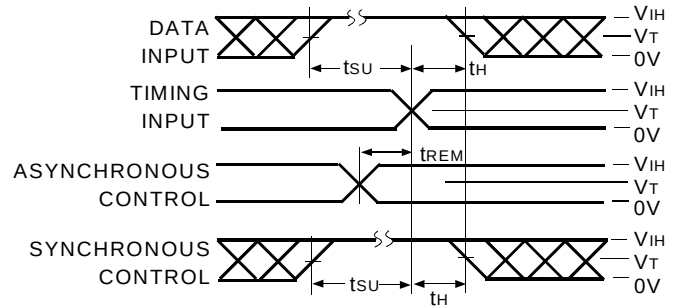

Set-up, Hold, and Release Times

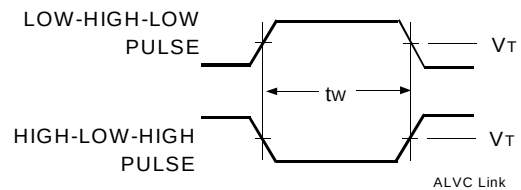

Pulse Width

## ORDERING INFORMATION

| IDT         | XX | AVC | X        | XX     | XXX         | XX      |                                                        |
|-------------|----|-----|----------|--------|-------------|---------|--------------------------------------------------------|
| Temp. Range |    |     | Bus-Hold | Family | Device Type | Package |                                                        |
|             |    |     |          |        |             | PV      | Shrink Small Outline Package                           |
|             |    |     |          |        |             | PA      | Thin Shrink Small Outline Package                      |
|             |    |     |          |        |             | PF      | Thin Very Small Outline Package                        |
|             |    |     |          |        |             | 334     | 16-Bit Universal Bus Driver with 3-State Outputs       |
|             |    |     |          |        |             | 16      | Double-Density with Dynamic Drive Capability,<br>±24mA |
|             |    |     |          |        |             | Blank   | No Bus-Hold                                            |
|             |    |     |          |        |             | 74      | −40°C to +85°C                                         |



### CORPORATE HEADQUARTERS

2975 Stender Way  
Santa Clara, CA 95054

### for SALES:

800-345-7015 or 408-727-6116  
fax: 408-492-8674  
www.idt.com

### for Tech Support:

logichelp@idt.com  
(408) 654-6459