

CMOS 4-Bit Microcontroller


TMP47C241N **TMP47C241M**

The TMP47C241 are high speed and high performance 4-bit single chip micro computers, integrating 8-bit AD converter, watchdog timer and serial Interface based on the TLC5-47 series.

Part No.	ROM	RAM	Package	OTP
TMP47C241N	2048 × 8-bit	128 × 4-bit	P-SDIP28-400-1.78	TMP47P241VN
TMP47C241M			P-SOP28-450-1.27	TMP47P241VM

Features

- ◆ 4-bit single chip microcomputer
- ◆ Instruction execution time: 1.3 μ s (at 6 MHz)
- ◆ Low voltage operation: 2.7 V (at 4.2 MHz)
- ◆ 90 basic instructions
 - Table look-up instructions
- ◆ Subroutine nesting: 15 levels max
- ◆ 6 interrupt sources (External: 2, Internal: 4)
 - All sources have independent latches each, and multiple interrupt control is available
- ◆ I/O port (21 pins)
 - Input 2 ports 5 pins
 - Output 2 ports 5 pins
 - I/O 4 ports 11 pins
- ◆ Two 12-bit Timer / Counters
 - Timer, event counter, and pulse width measurement mode
- ◆ Interval timer
- ◆ Watchdog Timer
- ◆ Serial Interface with 4-bit buffer
 - External / internal clock, and leading / trailing edge shift mode

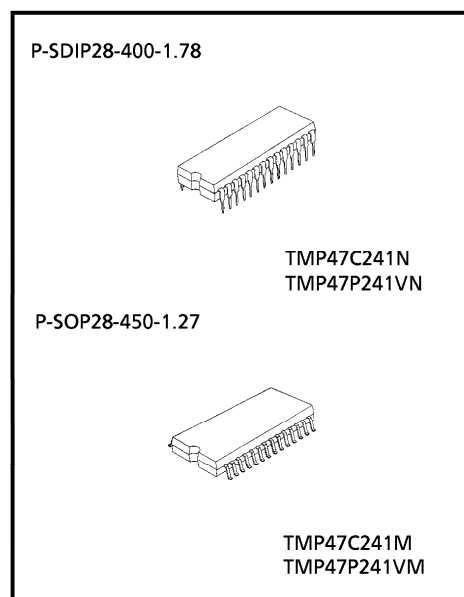


000707EBA1


- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

- ◆ 8-bit successive approximate type AD converter
(With sample and hold)
 - 4 analog inputs
 - Converting time: 48 μ s (4 MHz)
- ◆ High current outputs
LED direct drive capability: typ. 20 mA $\times$ 5 bits (Ports P1, P2)
typ. 7 mA $\times$ 3 bits (Port R9)
- ◆ Hold function
Battery / Capacitor back-up
- ◆ Real Time Emulator: BM47214A + BM1152 (SDIP)

Pin Assignment (Top View)

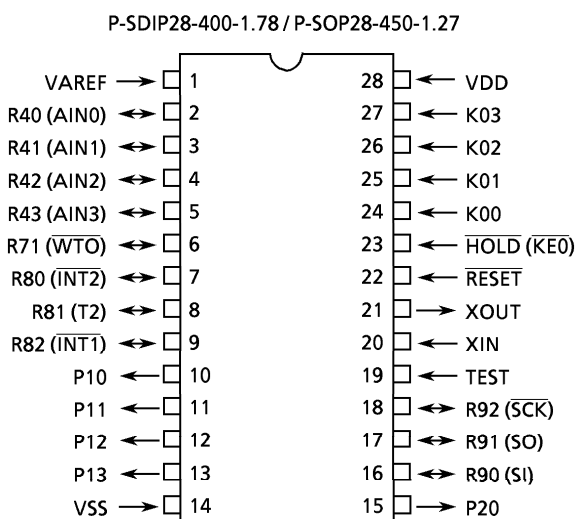

Block Diagram

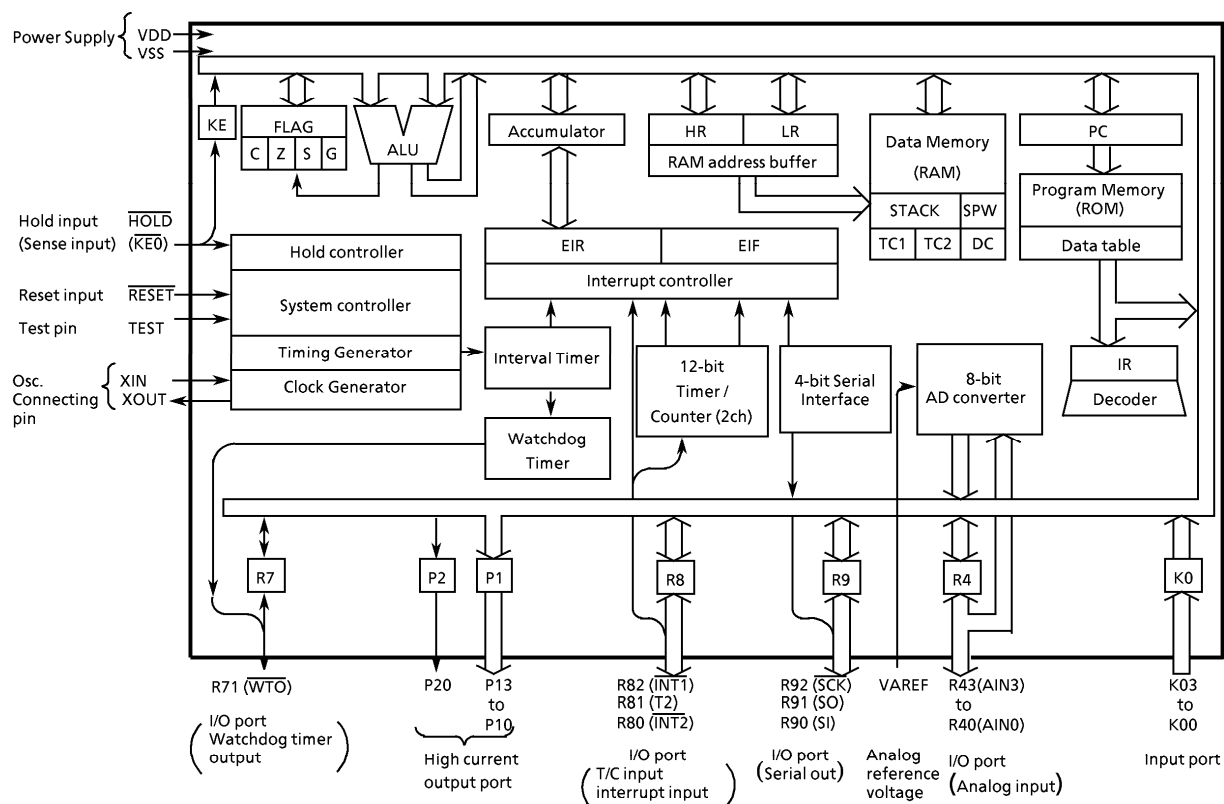

Pin Function

Pin Name	Input / Output	Functions	
K03 to K00	Input	4-bit input port	
P13 to P10	Output	4-bit output port with latch.	
P20		1-bit output port with latch.	
R43 (AIN3) to R40 (AIN0)	I/O (Input)	4-bit I/O port with latch. When using as input port, the latch must be set to "1".	AD converter analog input
R71 (WTO)	I/O (Output)	1-bit I/O port with latch. When using as input port or watchdog timer output, the latch must be set to "1".	Watchdog timer output
R82 (INT1)	I/O (Input)	3-bit I/O port with latch.	External interrupt 1 input
R81 (T2)		When using as input port, external interrupt input pin, or timer / counter external input pin, the latch must be set to "1".	Timer / Counter 2 external input
R80 (INT2)			External interrupt 2 input
R92 (SCK)	I/O (I/O)	3-bit I/O port with latch.	Serial clock I/O
R91 (SO)	I/O (Output)	When using as input port or serial port, the latch must be set to "1".	Serial data output
R90 (SI)	I/O (Input)		Serial data input
XIN	Input	Resonator connecting pin. For inputting external clock, XIN is used and XOUT is opened.	
XOUT	Output		
RESET	Input	Reset signal input	
HOLD (KE0)	Input (Input)	HOLD request / release signal input	Sense input
TEST	Input	Test pin for out-going test. Be opened or fixed to low level.	
VDD	Power supply	+ 5 V	AD converter analog reference voltage (GND)
VSS		0 V (GND)	
VAREF		AD converter analog reference voltage	

Operational Description

Concerning the TMP47C241, the hardware configuration and operation are described.
The configuration of basic machine instruction for TMP47C241 is same as TLCS-47 Series.

1. System Configuration

(1) Internal CPU Function

These as the same as the TMP47C203.

(2) Peripheral Hardware Function

- | | |
|------------------|--------------------|
| ① I/O Ports | ④ AD converter |
| ② Interval Timer | ⑤ Watchdog Timer |
| ③ Timer/Counters | ⑥ Serial Interface |

2. Peripheral Hardware Function

2.1 Ports

The TMP47C241 has 8 I/O ports (21 pins) each as follows:

- | | | |
|------|------------------------|---|
| ① K0 | ; 4-bit input | |
| ② P1 | ; 4-bit output | |
| ③ P2 | ; 1-bit output | |
| ④ R4 | ; 4-bit input / output | (shared by the AD converter analog inputs) |
| ⑤ R7 | ; 1-bit input / output | (shared by the watchdog timer output) |
| ⑥ R8 | ; 3-bit input / output | shared by external interrupt request input and timer / counter input) |
| ⑦ R9 | ; 3-bit input / output | (shared by serial port) |
| ⑧ KE | ; 1-bit sense input | (shared by hold request / release signal input) |

5 pins (typ. 20 mA) of P1, P2 ports and 3 pins (typ. 7 mA) of R9 port are high current output ports which can directly drive LEDs.

Table 2-3 lists the port address assignments and the I/O instructions that can access the ports.

The 5-bit to 8-bit data conversion instruction [OUTB @HL] is invalid.

(1) Port K0 (K03 to K00)

Port K0 is a 4-bit input-only port. A pull-up or pull-down resistor can be contained by the mask option.



Figure 2-1. Port K0

(2) Ports P1 (P13 to P10)

Ports P1 is 4-bit high current output ports which can directly drive LEDs, with 4-bit latches. When an input instruction is executed, the latch data is read in these ports. The latch is initialized to "1" during reset.

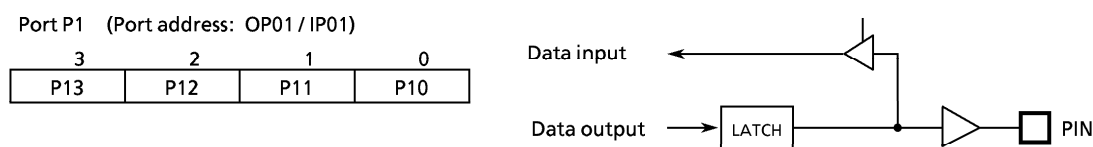


Figure 2-2. Ports P1

Electrical Characteristics

Absolute Maximum Ratings

(V_{SS} = 0 V)

Parameter	Symbol	Pins	Ratings	Unit
Supply Voltage	V _{DD}		– 0.3 to 7	V
Input Voltage	V _{IN}		– 0.3 to V _{DD} + 0.3	V
Output Voltage	V _{OUT1}	Except sink open drain pin	– 0.3 to V _{DD} + 0.3	V
	V _{OUT2}	Ports P1, P2, R7 to R9	– 0.3 to 10	
	V _{OUT3}	Analog inputs	– 0.3 to V _{DD} + 0.3	
Output Current (Per 1 pin)	I _{OUT1}	Ports P1, P2	30	mA
	I _{OUT2}	Port R9	15	
	I _{OUT3}	Ports R4, R7, R8	3.2	
Output Current (Total)	Σ I _{OUT1}	Ports P1, P2, R9	120	mA
Power Dissipation [Topr = 70°C]	PD		300	mW
Soldering Temperature (time)	Tsld		260 (10 s)	°C
Storage Temperature	Tstg		– 55 to 125	°C
Operating Temperature	Topr		– 30 to 70	°C

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Recommended Operating Conditions

(V_{SS} = 0 V, Topr = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions	Min	Max	Unit
Supply Voltage	V _{DD}		fc = 6.0 MHz	4.5	6.0	V
			fc = 4.2 MHz	2.7		
			In the HOLD mode	2.0		
Input High Voltage	V _{IH1}	Except Hysteresis Input	In the normal operating area	V _{DD} × 0.7	V _{DD}	V
	V _{IH2}	Hysteresis Input		V _{DD} × 0.75		
	V _{IH3}		In the HOLD mode	V _{DD} × 0.9		
Input Low Voltage	V _{IL1}	Except Hysteresis Input	In the normal operating area	0	V _{DD} × 0.3	V
	V _{IL2}	Hysteresis Input			V _{DD} × 0.25	
	V _{IL3}		In the HOLD mode		V _{DD} × 0.1	
Clock Frequency	fc		V _{DD} = 4.5 V to 6.0 V	0.4	6.0	MHz
			V _{DD} = 2.7 V to 6.0 V		4.2	
			In the RC oscillation		2.5	

Note: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

DC Characteristics

(V_{SS} = 0 V, Topr = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions	Min	Typ.	Max	Unit
Hysteresis Voltage	V _{HS}	Hysteresis Input		—	0.7	—	V
Input Current	I _{IN1}	Port K0, TEST, RESET, HOLD	V _{DD} = 5.5V, V _{IN} = 5.5V / 0V	—	—	± 2	μA
	I _{IN2}	Ports R (open drain)					
Input Resistance	R _{IN1}	Port K0 with pull-up/pull-down		30	70	150	kΩ
	R _{IN2}	RESET		100	220	450	
Output Leakage Current	I _{LO}	Ports R, P (open drain)	V _{DD} = 5.5 V, V _{OUT} = 5.5 V	—	—	2	μA
Output Low Voltage	V _{OL2}	Except XOUT, ports P	V _{DD} = 4.5 V, I _{OL} = 1.6 mA	—	—	0.4	V
Low Output Current	I _{OL1}	Ports P1, P2	V _{DD} = 4.5 V, V _{OL} = 1.0 V	—	20	—	mA
	I _{OL2}	Port R9		—	7	—	
Supply Current (in the Normal mode)	I _{DD}		V _{DD} = 5.5 V, f _c = 4 MHz	—	2	4	mA
			V _{DD} = 3.0 V, f _c = 4 MHz	—	1	2	
			V _{DD} = 3.0 V, f _c = 400 kHz	—	0.5	1	
Supply Current (in the HOLD mode)	I _{DDH}		V _{DD} = 5.5 V	—	0.5	10	μA

Note 1: Typ. values show those at Topr = 25°C, V_{DD} = 5 V.

Note 2: Input Current I_{IN1} ; The current through resistor is not included, when the input resistor (pull-up/pull-down) is contained.

Note 3: Supply Current I_{DD}, I_{DDH} ; V_{IN} = 5.3 V / 0.2 V (V_{DD} = 5.5 V), 2.8 V / 0.2 V (V_{DD} = 3.0 V)

AD Conversion Characteristics

(Topr = – 30 to 70°C)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Analog Reference Voltage	V _{AREF}		V _{DD} – 1.5	—	V _{DD}	V
Analog Reference Voltage Range	ΔV _{AREF}	V _{AREF} – V _{SS}	2.7	—	—	V
Analog Input Voltage	V _{AIN}		V _{SS}	—	V _{AREF}	V
Analog Supply current	I _{REF}		—	0.5	1.0	mA
Nonlinearity Error		V _{DD} = 5.0 V, V _{SS} = 0.0 V V _{AREF} = 5.000 V V _{ASS} = 0.000 V	—	—	± 1	LSB
Zero Point Error			—	—	± 1	
Full Scale Error			—	—	± 1	
Total Error			—	—	± 2	



AC Characteristics

(V_{SS} = 0 V, T_{opr} = – 30 to 70°C)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Instruction Cycle Time	t _{cy}	V _{DD} = 4.5 to 6.0 V	1.3	—	20	μs
		V _{DD} = 2.7 to 6.0 V	1.9			
High level Clock pulse Width	t _{WCH}	External clock mode	80	—	—	ns
Low level Clock pulse Width	t _{WCL}					
AD Sampling Time	t _{AIN}		—	4	—	μs
Shift Data Hold Time	t _{SDH}		0.5 t _{cy} – 0.3	—	—	μs

Note: Shift Data Hold TimeExternal circuit for $\overline{\text{SCK}}$ pin and SO pin

Serial port (completion of transmission)

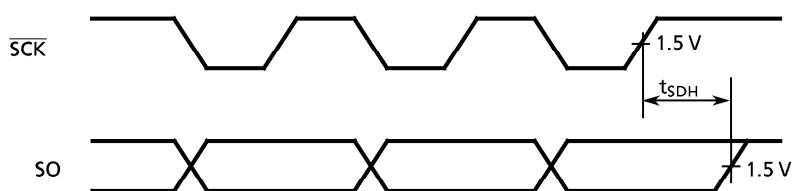

Recommended Oscillating Conditions

(V_{SS} = 0 V, V_{DD} = 2.7 to 6.0 V, T_{opr} = – 30 to 70°C)

(1) 6 MHz

Ceramic Resonator

CSA6.00MG (MURATA)

KBR-6.00MS (KYOCERA)

C_{XIN} = C_{XOUT} = 30 pFC_{XIN} = C_{XOUT} = 30 pF

(2) 4 MHz

Ceramic Resonator

CSA4.00MG (MURATA)

KBR-4.00MS (KYOCERA)

FCR4.0M5 (TDK)

Crystal Oscillator

204B-6F 4.0000 (TOYOCOM) C_{XIN} = C_{XOUT} = 20 pFC_{XIN} = C_{XOUT} = 30 pFC_{XIN} = C_{XOUT} = 30 pFC_{XIN} = C_{XOUT} = 33 pF

(3) 400 kHz

Ceramic Resonator


CSB400B (MURATA)

KBR-400B (KYOCERA)

C_{XIN} = C_{XOUT} = 220 pF, R_{XOUT} = 6.8 kΩC_{XIN} = C_{XOUT} = 100 pF, R_{XOUT} = 10 kΩ(4) RC Oscillation (V_{SS} = 0 V, V_{DD} = 5.0 V, T_{opr} = 25°C)

2 MHz (typ.)

400 kHz (typ.)

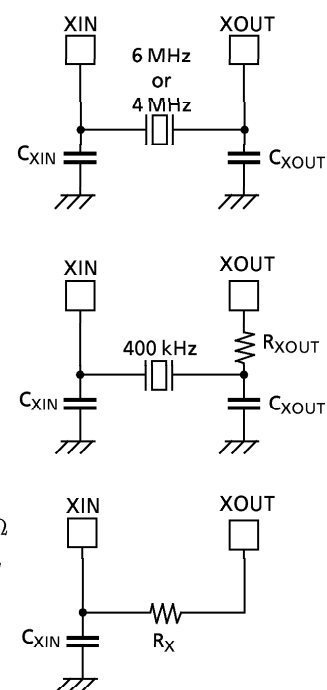C_{XIN} = 33 pF, R_X = 10 kΩC_{XIN} = 100 pF, R_X = 26 kΩ

Typical Characteristics

