

CMOS 4-BIT MICROCONTROLLER


TMP47P834N
TMP47P834F

The 47P834 is the OTP microcontroller with 64kbits PROM. For program operation, the programming is achieved by using with EPROM programmer (TMM27128A type) and adaptor socket. The function of this device is exactly same as the 47C834.


PART No.	ROM	RAM	PACKAGE
TMP47P834N	OTP 8192 × 8-bit	512 × 4-bit	SDIP42-P-600-1.78

PIN ASSIGNMENT (TOP VIEW)

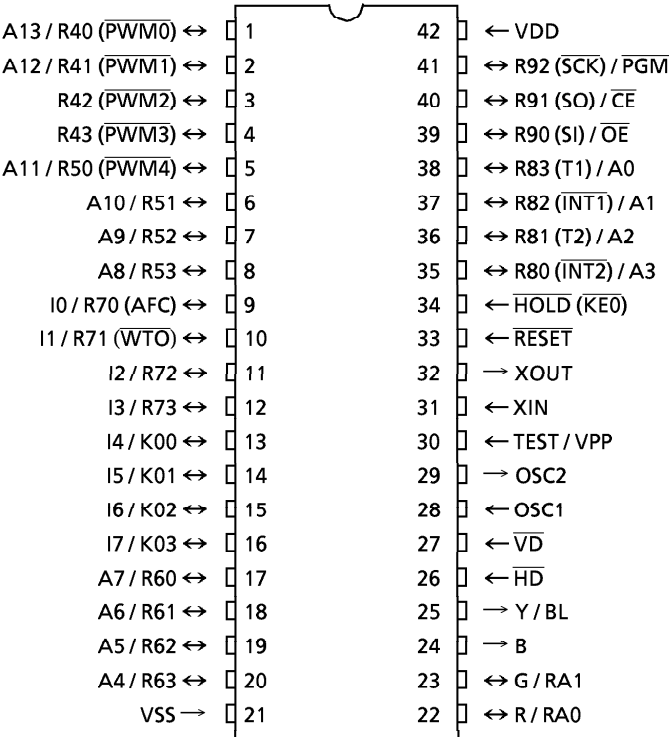SDIP42-P-600-1.78





SDIP42-P-600-1.78



TMP47P834N

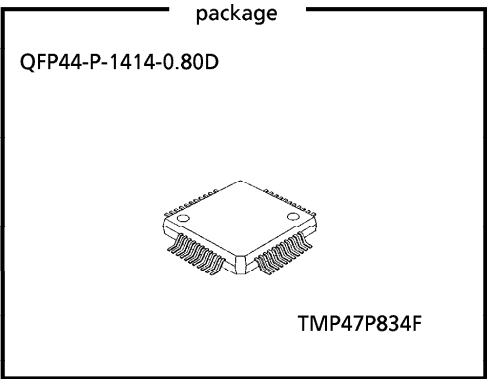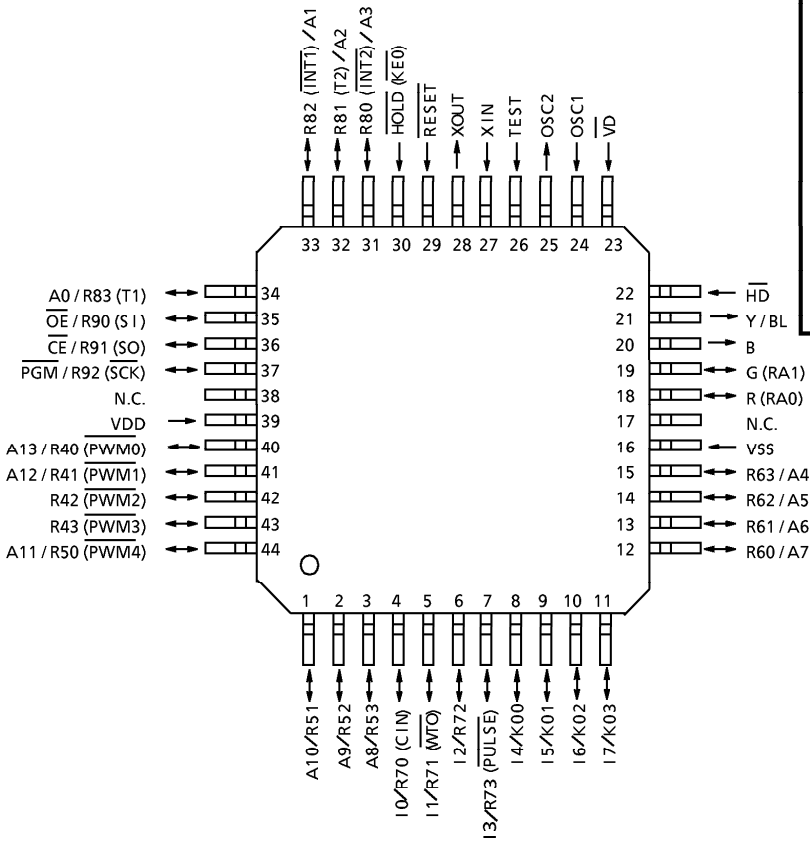QFP44-P-1414-0.80D



PIN FUNCTION

The 47P834 has MCU mode and PROM mode.

(1) MCU mode

The 47C834 and the 47P834 are pin compatible (TEST pin for out-going test. Be fixed to low level).

(2) PROM mode

PIN NAME	Input / Output	FUNCTIONS	PIN NAME (MCU mode)
A13 to A12	Input	Address inputs	R41 to R40
A11 to A8			R53 to R50
A7 to A4			R63 to R60
A3 to A0			R83 to R80
I7 to I4	I/O	Data Inputs / outputs	K03 to K00
I3 to I0			R73 to R70
PGM	Input	Program control input	R92
CE		Chip Enable input	R91
OE		Chip Enable input	R90
VPP	Power supply	+ 12.5 V / 5 V (Program supply voltage)	TEST
VCC		+ 5 V	VDD
VSS		0 V	VSS
OSC1	Output	OSD resonator connecting pins	
OSC2			
Y, B, HD, VD	OSD output	Be fixed to low level	
G / R			
RESET	Input	PROM mode setting pin. Be fixed to low level.	
HOLD	Input		
XIN	Input	Resonator connecting pins	
XOUT	Output		

OPERATIONAL DESCRIPTION

The following is an explanation of hardware configuration and operation in relation to the 47P834. The 47P834 is the same as the 47C834 except that an EPROM or OTP is used instead of a built-in mask ROM.

1. OPERATION mode

The 47P834 has an MCU mode and a PROM mode.

1.1 MCU mode

The MCU mode is set by fixing the TEST/VPP pin at the "L" level. Operation in the MCU mode is the same as for the 47C834, except that the TEST/VPP pin does not have built in pull-down resistor and cannot be used open.

1.1.1 Program Memory

The program storage area is the same as for the 47C834. Data conversion tables must be set in two locations when using the 47P834 to check 47C434/634 operation.

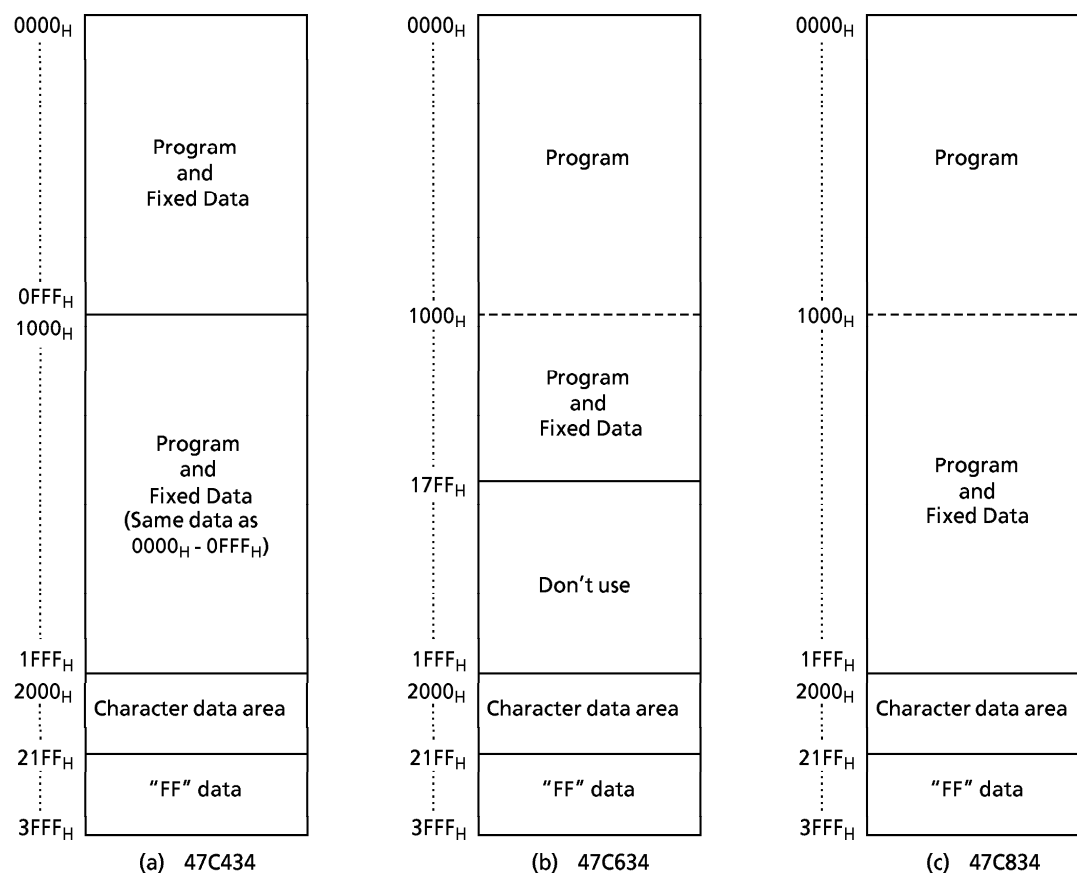


Figure 1-1. Program area

Note. Some data have been written in address "21F0_H" to "21FF_H", because of the out-going test.

1.1.2 Data Memory

The 47P834 has two built-in 256 × 4-bit data memory banks (DMB0, DMB1).

When using the 47P834 as a 47C634 evaluator, do not write data to address 80_H and following, even though the DMB1 addresses are 00-FF_H. And when using as a 47C434 evaluator, do not write data to the whole DMB1. There is no necessary to take into consideration a special function shared area, because one is built in DMB0.

1.1.3 Other Peripheral Hardware Function

Using as 47C434/634 evaluator, do not write data into the command register OP0B of PULSE output control and Image Receiving Mode Control.










1.1.4 Input/Output Circuitry

(1) Control pins

This is the same as for the 47C434/634/834 except that there is no built in pull-down resistor for the TEST pin. Input/output circuitry of the 47P834 control pins is shown below.

CONTROL PIN	I/O	CIRCUITRY	REMARKS
XIN XOUT	Input Output		Resonator connecting pins $R = 1\text{ k}\Omega$ (typ.) $R_f = 1.5\text{ M}\Omega$ (typ.) $R_O = 2\text{ k}\Omega$ (typ.)
$\overline{\text{RESET}}$	Input		Hysteresis input Contained pull-up resistor $R_{IN} = 220\text{ k}\Omega$ (typ.) $R = 1\text{ k}\Omega$ (typ.)
$\overline{\text{HOLD}}$ (KE0)	Input (Input)		Hysteresis input (Sense input) $R = 1\text{ k}\Omega$ (typ.)
TEST	Input		Not contained pull-down resistor $R = 1\text{ k}\Omega$ (typ.)
OSC1 OSC2	Input Output		Oscillation terminals for OSD $R = 1\text{ k}\Omega$ (typ.) $R_f = 1.5\text{ M}\Omega$ (typ.) $R_O = 2\text{ k}\Omega$ (typ.)
$\overline{\text{HD}}$ $\overline{\text{VD}}$	Input		Synchronous signal input Hysteresis input $R = 1\text{ k}\Omega$ (typ.)

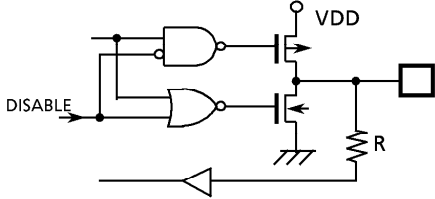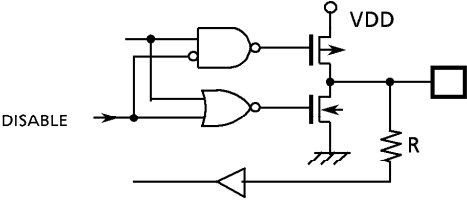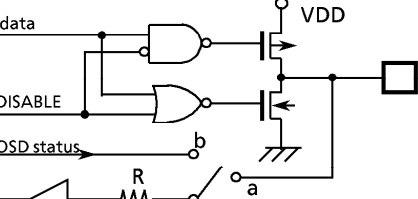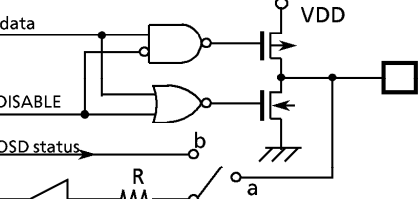The input/output circuitry of the 47P834 I/O port is as follows.

PORT	I/O	INPUT/OUTPUT CIRCUITRY (code : PA)	REMARKS
K0	Input		Not contained Pull-up or pull-down resistor R = 1 kΩ (typ.)
R4 R50	I/O		Tri-state Initial "Hi-Z" R = 1 kΩ (typ.)
R51 R52 R53	I/O		Tri-state Initial "Hi-Z" R = 1 kΩ (typ.)
R6 R8 R9	I/O	R6  R8, R9 	Sink open drain Initial "Hi-Z" Hysteresis input (R8, R9) R = 1 kΩ (typ.)
R7	I/O	R70 Initial "Hi-Z"  R71 to R73 Initial "High" 	Sink open drain and push-pull Comparator input (R70 pin) R = 1 kΩ (typ.)
R (RA0) G (RA1)	I/O		Tri-state Initial "Hi-Z" R = 1 kΩ (typ.)
B Y (BL)	Output		R, G : Side a B, Y : Side b

1.2 PROM mode

The PROM mode is set by setting the $\overline{\text{RESET}}$, $\overline{\text{HOLD}}$, R and G pins to the "L" level. The PROM mode can be used as a general-purpose PROM writer for program writing and verification. (A high-speed program mode is used set the ROM type the same as for the TMM 27128A.)

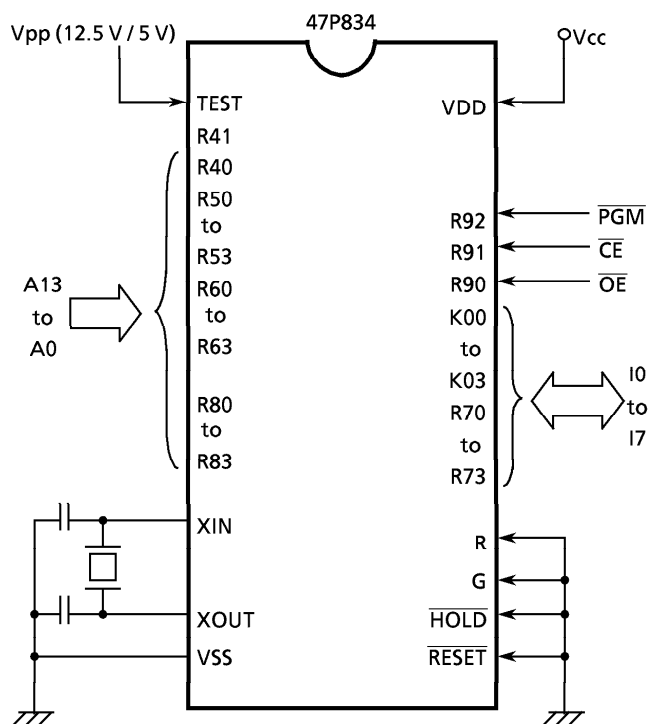


Figure 1-3. Setting for PROM mode

1.2.1 High speed programming mode

The device is set up in the high speed programming mode when the programming voltage (12.5 V) is applied to the Vpp pin with Vcc = 6 V and $\overline{\text{PGM}} = V_{IH4}$. The programming is achieved by applying a single TTL low level 1 ms, pulse the $\overline{\text{PGM}}$ input after addresses and data are stable. Then the programmed data is verified by using Program Verify mode. If the programmed data is not correct, another program pulse of 1 ms is applied and then programmed data is verified. This should be repeated until the program operates correctly (max. 15 times) After correctly programming the selected address, one additional program pulse with pulse width 4 times that needed for programming is applied. When programming has been completed, the data in all addresses should be verified with Vcc = Vpp = 5 V.

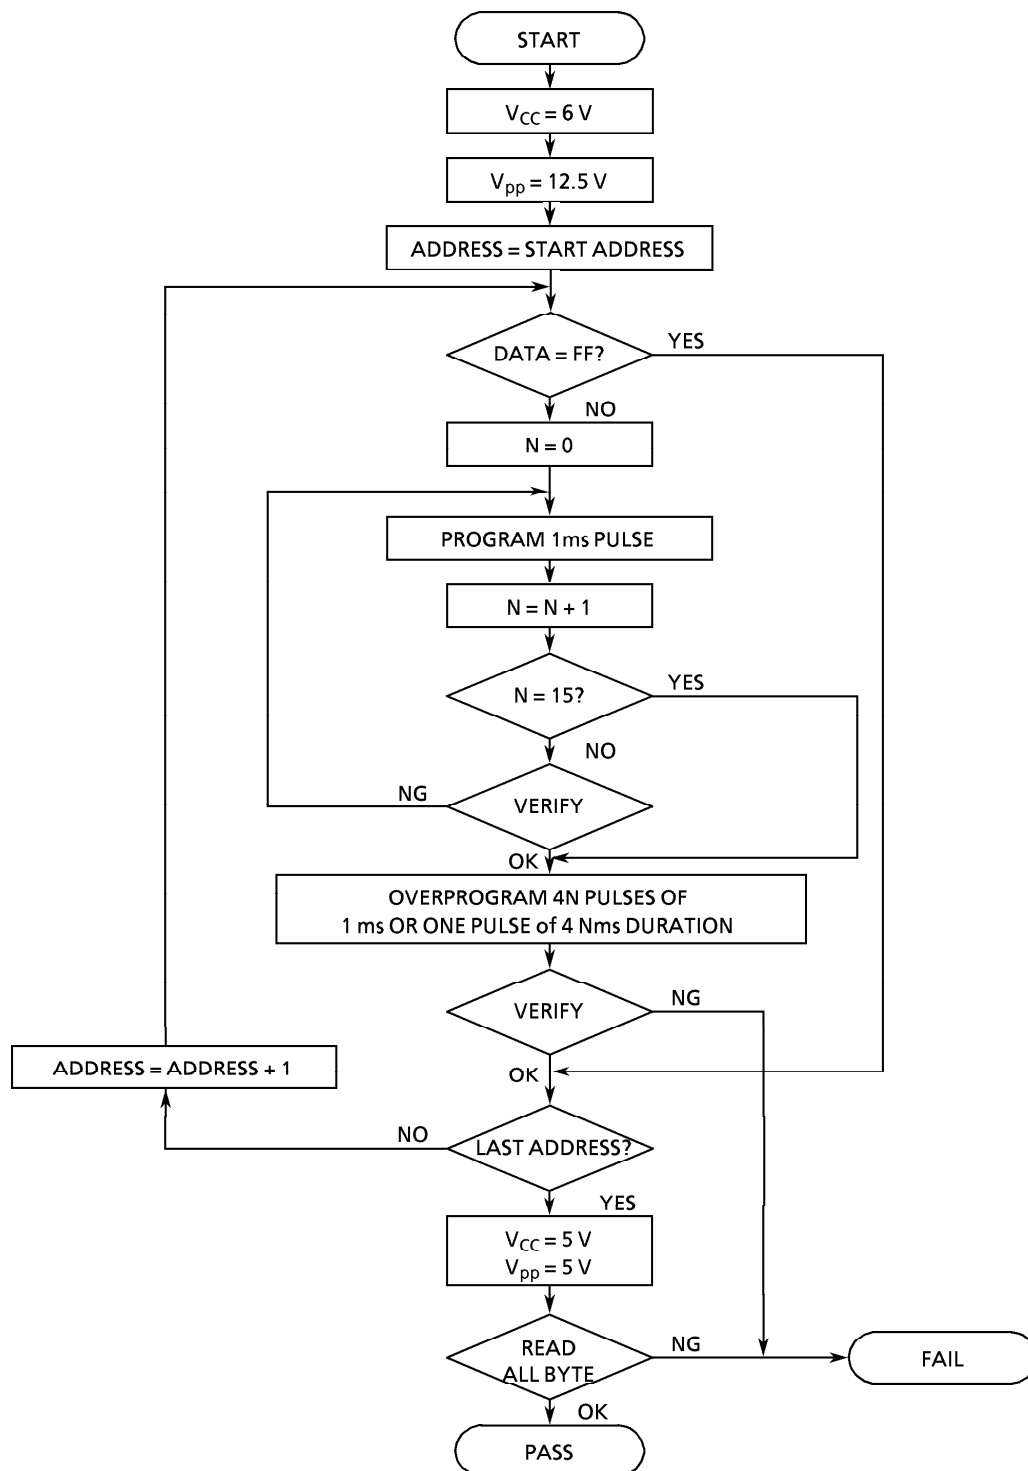


Figure1-4. FLOW CHART

ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS ($V_{SS} = 0\text{ V}$)

PARAMETER	SYMBOL	PINS	RATING	UNIT
Supply Voltage	V_{DD}		- 0.3 to 7	V
Input Voltage	V_{IN}		- 0.3 to $V_{DD} + 0.3$	V
Output Voltage	V_{OUT1}	Except sink open drain pin	- 0.3 to $V_{DD} + 0.3$	V
	V_{OUT2}	Sink open drain pin except R7 port	- 0.3 to 10	
Output Current (Per 1 pin)	I_{OUT1}	R6 port	30	mA
	I_{OUT2}	R7, R8, R9 port	3.2	
Output Current (Total)	ΣI_{OUT1}	R6 port	60	mA
Power Dissipation	PD		600	mW
Soldering Temperature (time)	T_{Sld}		260 (10 s)	°C
Storage Temperature	T_{stg}		- 55 to 125	°C
Operating Temperature	T_{opr}		- 30 to 70	°C
Programming Voltage	V_{pp}	TEST / VPP pin	- 0.3 to 14.0	V

RECOMMENDED OPERATING CONDITIONS ($V_{SS} = 0\text{ V}$, $T_{opr} = -30\text{ to }70\text{ °C}$)

PARAMETER	SYMBOL	PINS	CONDITIONS	Min.	Max.	UNIT
Supply Voltage	V_{DD}		in the Normal mode	4.5	6.0	V
			in the HOLD mode	2.0		
Input High Voltage	V_{IH1}	Except Hysteresis Input	$V_{DD} \geq 4.5\text{ V}$	$V_{DD} \times 0.7$	V_{DD}	V
	V_{IH2}	Hysteresis Input		$V_{DD} \times 0.75$		
	V_{IH3}		$V_{DD} < 4.5\text{ V}$	$V_{DD} \times 0.9$		
Input Low Voltage	V_{IL1}	Except Hysteresis Input	$V_{DD} \geq 4.5\text{ V}$	0	$V_{DD} \times 0.3$	V
	V_{IL2}	Hysteresis Input			$V_{DD} \times 0.25$	
	V_{IL3}		$V_{DD} < 4.5\text{ V}$		$V_{DD} \times 0.1$	
Clock Frequency	f_c	XIN, XOUT		0.4	4.2	MHz
	f_{OSD}	OSC1, OSC2		-	6.0	

Note. Input Voltage V_{IH3} , V_{IL3} : in the HOLD mode.

D.C. CHARACTERISTICS (V_{SS} = 0 V, T_{opr} = -30 to 70 °C)

PARAMETER	SYMBOL	PINS	CONDITIONS	Min.	Typ.	Max.	UNIT
Hysteresis Voltage	V _{HS}	Hysteresis Input		—	0.7	—	V
Input Current	I _{IN1}	K0 port, TEST, RESET, HOLD	V _{DD} = 5.5 V,	—	—	± 2	μA
	I _{IN2}	R port (open drain)	V _{IN} = 5.5 V / 0 V				
Input Low Current	I _{IL}	R port (push-pull)	V _{DD} = 5.5 V, V _{IN} = 0.4 V	—	—	-2	mA
Input Resistance	R _{IN1}	K0 port with pull-up/pull-down		30	70	150	kΩ
	R _{IN2}	RESET		100	220	450	
Output Leakage Current	I _{LO}	Tri-state R6, R8, R9 port (open drain)	V _{DD} = 5.5 V, V _{OUT} = 5.5 V	—	—	± 2	μA
Output High Voltage	V _{OH1}	R port (push-pull)	V _{DD} = 4.5 V, I _{OH} = -200 μA	2.4	—	—	V
	V _{OH2}	R port (tri-state), OSD output	V _{DD} = 4.5 V, I _{OH} = -0.7 mA	4.1	—	—	
Output Low Voltage	V _{OL1}	R7, R8, R9 port	V _{DD} = 4.5 V, I _{OL} = 1.6 mA	—	—	0.4	V
	V _{OL2}	R port (tri-state), OSD output	V _{DD} = 4.5 V, I _{OL} = 0.7 mA				
Output Low Current	I _{OL}	R6 port	V _{DD} = 4.5 V, V _{OL} = 1.0 V	—	20	—	mA
Supply Current (in the Nomal mode)	I _{DD}		V _{DD} = 5.5 V f _c = 4 MHz	—	5	10	mA
Supply Current (in the HOLD mode)	I _{DDH}		V _{DD} = 5.5 V	—	0.5	10	μA

Note 1. Typ. values show those at T_{opr} = 25 °C, V_{DD} = 5 V.

Note 2. Input Current I_{IN1} : The current through resistor is not included, when the pull-up/pull-down resistor is contained.

Note 3. Supply Current : V_{IN} = 5.3 V / 0.2 V
The K0 port is open when the pull-up / pull-down resistor is contained.
The voltage applied to the R port is within the valid range V_{IL} or V_{IH}.


A / D CONVERSION CHARACTERISTICS

PARAMETER	SYMBOL	PINS	CONDITIONS	Min.	Typ.	Max.	UNIT
Analog Input Voltage	V _{AIN}	CIN		V _{SS}	—	V _{DD}	V
A/D Conversion Error	—			—	—	± 1/4	LSB


A.C. CHARACTERISTICS ($V_{SS} = 0\text{ V}$, $V_{DD} = 4.5\text{ to }6.0\text{ V}$, $T_{opr} = -30\text{ to }70\text{ }^{\circ}\text{C}$)

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Instruction Cycle Time	t_{cy}		1.9	—	20	μs
High level Clock Pulse Width	t_{WCH}	For external clock operation	80	—	—	ns
Low level Clock Pulse Width	t_{WCL}					
Shift Data Hold Time	t_{SDH}		$0.5t_{cy} - 300$	—	—	ns

Note. Shift data Hold Time
External circuit for $\overline{\text{SCK}}$ pin and SO pin



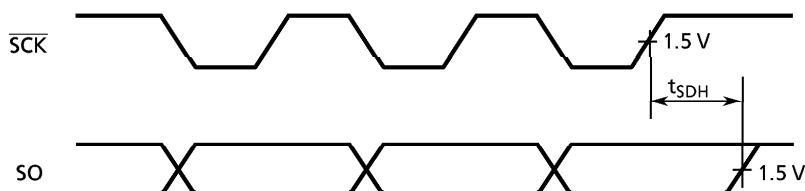Serial port (completion of transmission)



RECOMMENDED OSCILLATING CONDITIONS ($V_{SS} = 0\text{ V}$, $V_{DD} = 4.5\text{ to }6.0\text{ V}$, $T_{opr} = -30\text{ to }70\text{ }^{\circ}\text{C}$)

Recommended oscillating conditions of the 47P834 are equal to the 47C834's.

DC/AC CHARACTERISTICS ($V_{SS} = 0\text{ V}$)

(1) Read Operation

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Output Level High Voltage	V_{IH4}		$V_{CC} \times 0.7$	—	V_{CC}	V
Output Level Low Voltage	V_{IL4}		0	—	$V_{CC} \times 0.3$	V
Supply Voltage	V_{CC}		4.75	—	6.0	V
Programming Voltage	V_{PP}					
Address Access Time	t_{ACC}	$V_{CC} = 5.0 \pm 0.25\text{ V}$	0	—	350	ns

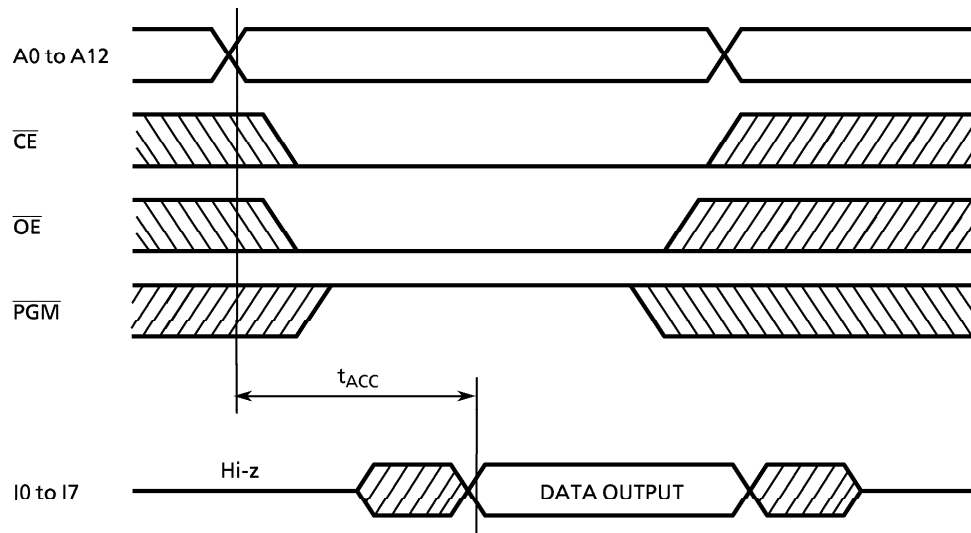

(2) High Speed Programming Operation

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Input High Voltage	V_{IH4}		$V_{CC} \times 0.7$	—	V_{CC}	V
Input Low Voltage	V_{IL4}		0	—	$V_{CC} \times 0.3$	V
Supply Voltage	V_{CC}		4.75	—	6.0	V
V_{PP} Power Supply Voltage	V_{PP}		12.25	12.5	12.75	V
Programming Pulse Width	t_{PW}	$V_{CC} = 6.0 \pm 0.25$ V	0.95	1.0	1.05	ms

