

**Features**

- 3.5V to 20V DC Operation Voltage
- Temperature Compensation
- Wide Operating Voltage Range
- Open-Collector Pre-Driver
- 25mA Maximum Sinking Output Current
- Reverse Polarity Protection
- Lead Free Finish/RoHS Compliant for Lead Free products (Note 1)
- Package: SIP-3L, SC59-3L
- Green Package: SC59-3L


**General Description**

ATS137 is a switched Hall-Effect IC, which is for contactless switching applications. The device includes an on-chip Hall voltage generator for magnetic sensing, an amplifier that amplifies the Hall voltage, a Schmitt trigger to provide switching hysteresis for noise rejection, and an open-collector output. The bandgap regulator allows a wide operating voltage range. ATS137 is rated for operating temperature range from -20°C to 85°C and voltage range from 3.5V to 20V.

**Applications**

- VCD/DVD Loader, CD/DVD ROM
- Cover Detector
- Speed Measurement
- Home Appliances
- Home Safety

**Ordering Information**

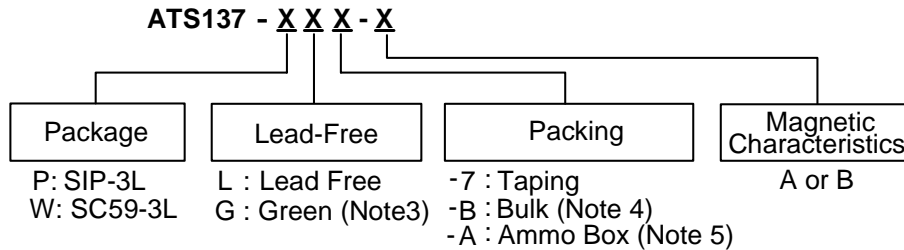

Note: 1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.


Device	Package Code	Packaging (Note 2)	Tube/Bulk		7" Tape and Reel		Ammo Box	
			Quantity	Part Number Suffix	Quantity	Part Number Suffix	Quantity	Part Number Suffix
ATS137-P	P	SIP-3L	1000	-B	NA	NA	4000/Box	-A
ATS137-W	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA

- Note: 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
3. Green is only available for SC59-3L
4. Bulk is for SIP-3 Straight Lead.
5. Ammo Box is for SIP-3 Spread Lead.

---

### Typical Circuit


---

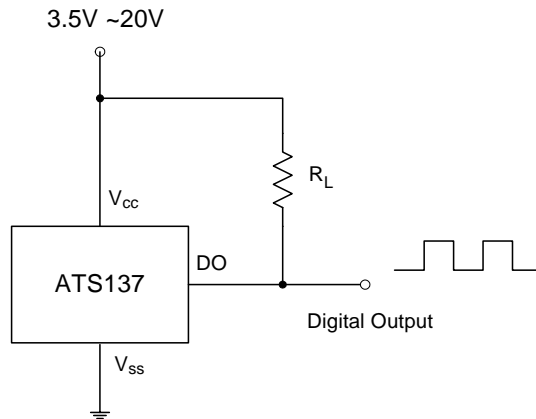


---

### Functional Block Diagrams


---

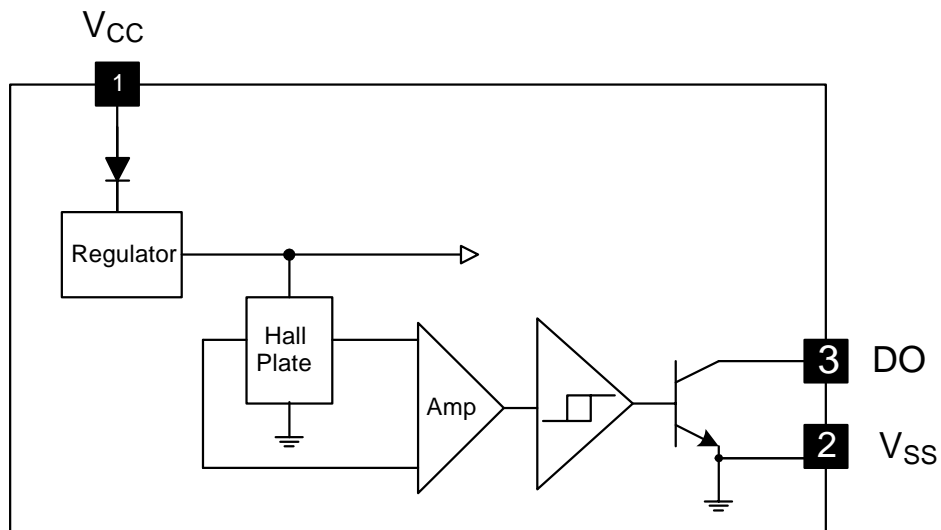

**Pin Descriptions**

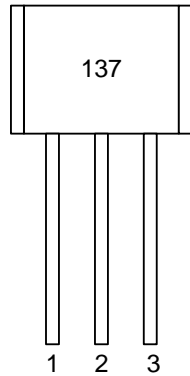

**SIP-3L**



**SC59-3L**

Top view

- 1 : VCC
- 2 : VSS
- 3 : DO

Name	P/I/O	Pin #	Description
V <sub>CC</sub>	P	1	Positive Power Supply
V <sub>SS</sub>	P	2	Ground
DO	O	3	Digital Output


**Absolute Maximum Ratings** (T<sub>A</sub> = 25°C)

Characteristics	Symbol	Values	Unit
Supply Voltage	V <sub>CC</sub>	20	V
Reverse V <sub>CC</sub> Polarity Voltage	V <sub>RCC</sub>	-20	V
Magnetic Flux Density	B	Unlimited	
Output "OFF" Voltage	V <sub>ce</sub>	30	V
Output "ON" Current	I <sub>C</sub>	25	mA
Operating Temperature	T <sub>A</sub>	-20~+85	°C
Storage Temperature	T <sub>s</sub>	-65~+150	°C
Maximum Junction Temperature	T <sub>j</sub>	150	°C
Package Power Dissipation	SIP-3L	550	mW
	SC59-3L	230	mW

**Electrical Characteristics** ( $T_A = + 25^\circ\text{C}$ )

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage	$V_{CC}$	—	3.5	-	20	V
Output Saturation Voltage	$V_{ce(SAT)}$	$V_{CC} = 14\text{V}, I_{CC} = 20\text{mA}$	-	300	700	mV
Output Leakage Current	$I_{cex}$	$V_{ce} = 14\text{V}, V_{CC} = 14\text{V}$	-	<0.1	10	uA
Supply Current	$I_{CC}$	$V_{CC} = 20\text{V}, \text{Output Open}$	-	5	10	mA
Output Rise Time	$t_r$	$V_{CC} = 14\text{V}, R_L = 820\Omega, CL = 20\text{pF}$	-	0.3	1.5	us
Output Falling Time	$t_f$	$V_{CC} = 14\text{V}, R_L = 820\Omega, CL = 20\text{pF}$	-	0.3	1.5	us

**Test Circuit**

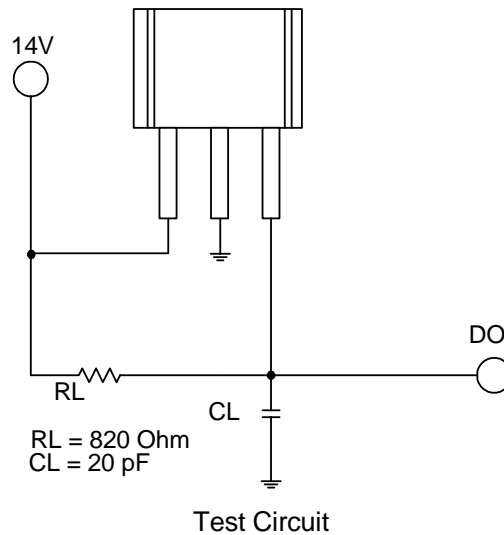

**Magnetic Characteristics** ( $T_A = 25^\circ\text{C}$ )

(1mT = 10 Gauss)

**A grade**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operation Point	Bop	-	-	100	Gauss
Release Point	Brp	10	-	-	Gauss
Hysteresis	Bhys	-	80	-	Gauss

**B grade (for SIP-3L only)**

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operation Point	Bop	-	-	130	Gauss
Release Point	Brp	10	-	-	Gauss
Hysteresis	Bhys	-	80	-	Gauss

**Application Information**

Operating principle:

ATS137 is a three-pin Hall Effect switch IC which can turn magnetic flux variety to digital output signal. In other words, it is an interface from magnetic system to an electrical one by Hall effect. The illustrations are shown in Fig.1.

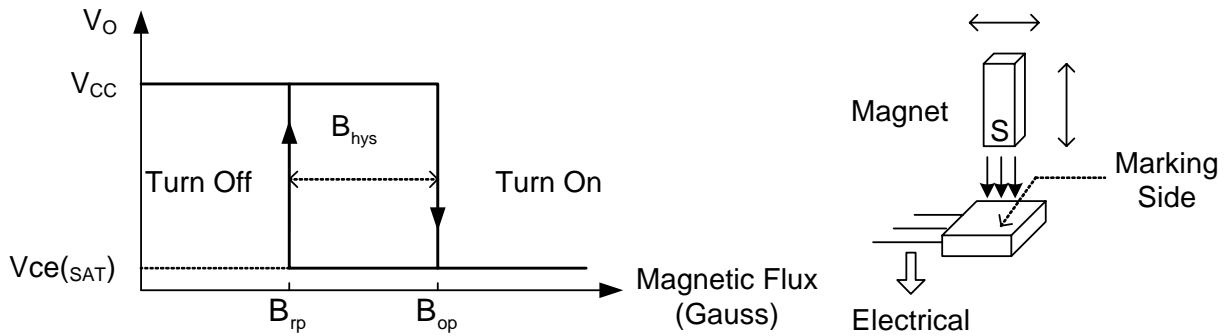


Fig.1 Hall-Effect Switch

Output driver is open-collector topology and maximum sink current ( $I_{sink}$ ) is 25mA. The illustrated circuit is shown as Fig. 2.

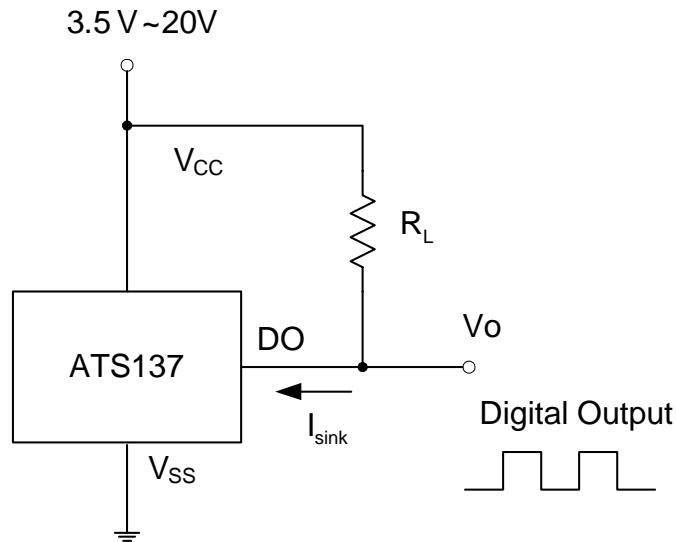


Fig.2 Application Circuit

**Application Information** (Continued)

$V_o$  will turn on (low) if the S magnetic flux larger than the operation point ( $B_{op}$ ), and turns off whenever the magnetic flux is removed and lower than the release point ( $B_{rp}$ ). The related waveforms are shown in Fig.3.

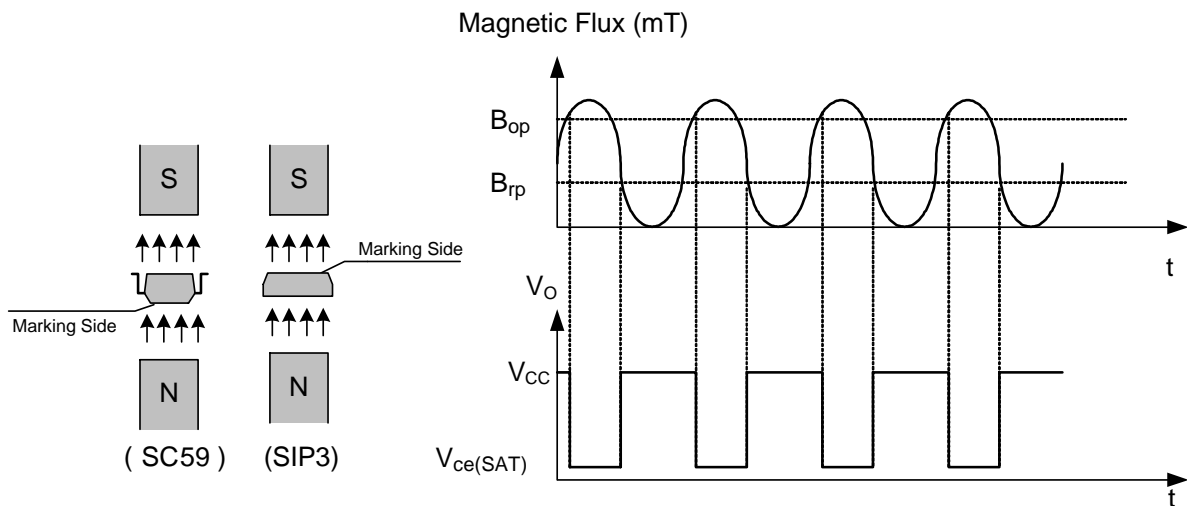



Fig.3  $V_o$  and Magnetic Flux Variety

The major applications are for contactless switching and shown as follows:

- VCD/DVD loader, CD/DVD ROM: Detect if the tray is opened or closed.
- Cover detector (open/close): Cellular phone cover detector, refrigerator door detector, microwave oven door sensor, etc.
- Home safety: instead of reed relay to detect the situation of door/window.
- Due to contactless and without mechanical contact point, its reliability and life cycle are much longer than reed relay. In addition, its switching speed is much faster than mechanical devices.


**Performance Characteristics (SIP-3L)**

<b>T<sub>A</sub> (°C)</b>	<b>25</b>	<b>50</b>	<b>60</b>	<b>70</b>	<b>80</b>	<b>85</b>	<b>90</b>	<b>95</b>	<b>100</b>
P <sub>D</sub> (mW)	550	440	396	352	308	286	264	242	220
<b>T<sub>A</sub> (°C)</b>	<b>105</b>	<b>110</b>	<b>115</b>	<b>120</b>	<b>125</b>	<b>130</b>	<b>135</b>	<b>140</b>	<b>150</b>
P <sub>D</sub> (mW)	198	176	154	132	110	88	66	44	0

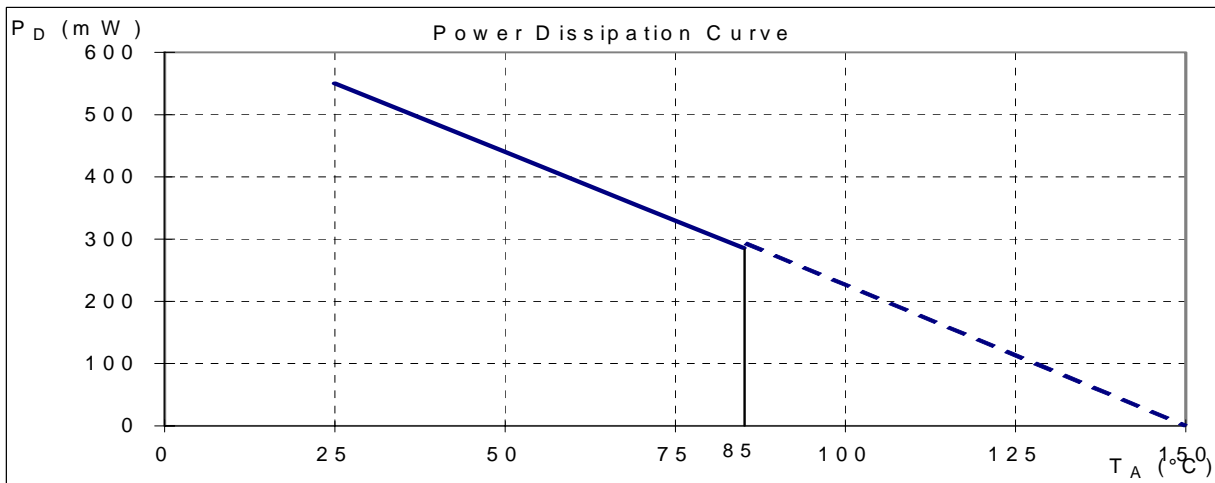


**Performance Characteristics (SC59-3L)**

<b>T<sub>a</sub> (°C)</b>	<b>25</b>	<b>50</b>	<b>60</b>	<b>70</b>	<b>80</b>	<b>85</b>	<b>90</b>	<b>100</b>	<b>110</b>	<b>120</b>	<b>125</b>	<b>130</b>	<b>140</b>	<b>150</b>
P <sub>d</sub> (mW)	230	184	166	147	129	120	110	92	74	55	46	37	18	0

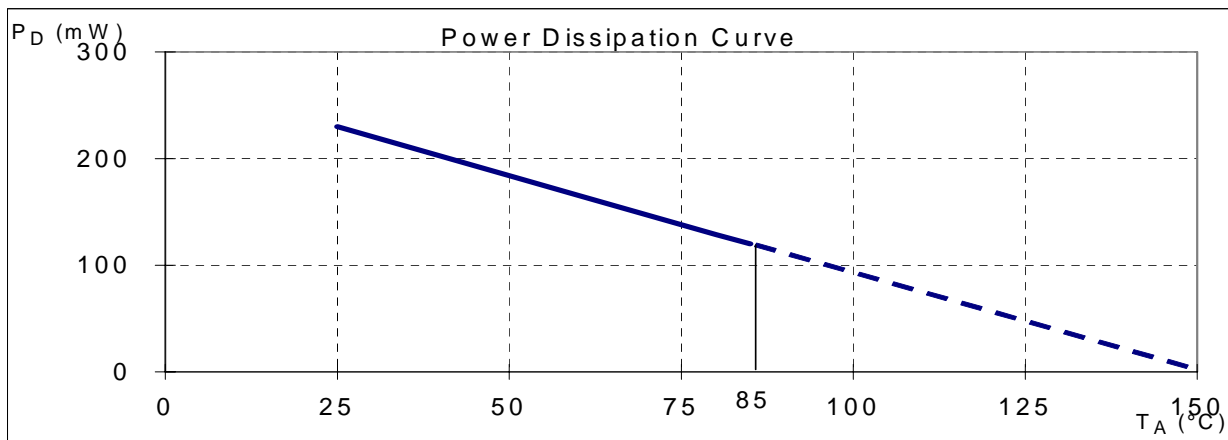


**Marking Information**

(1) SC59-3L

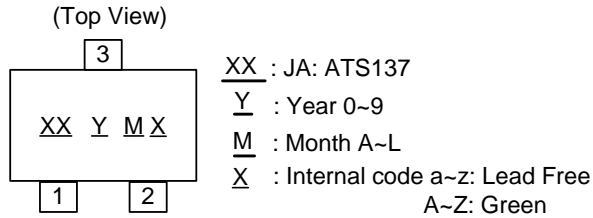


Part Number	Package	Identification Code
ATS137	SC59-3L	JA

(2) SIP-3L

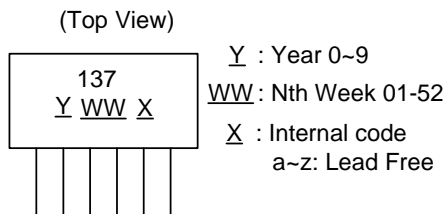


**Package Information** (unit: mm)

(1) Package Type: SIP-3L for Bulk pack



Active Area Depth




Sensor Location




**Package Information (Continued)**

**Package Dimension**


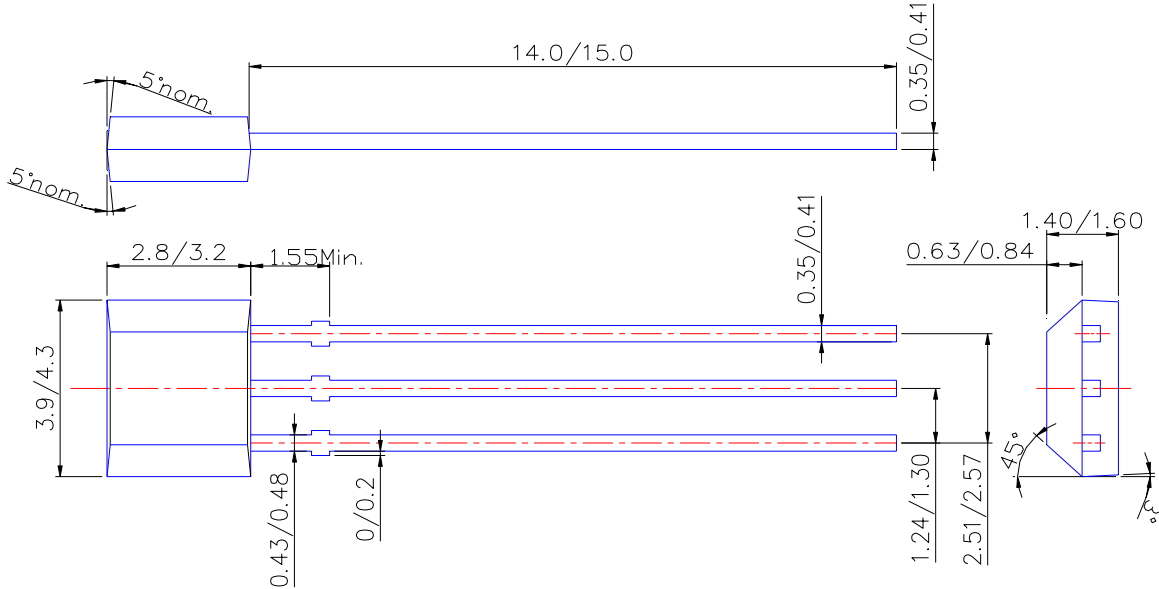


**(2) Package Type: SIP-3L for Ammo pack**

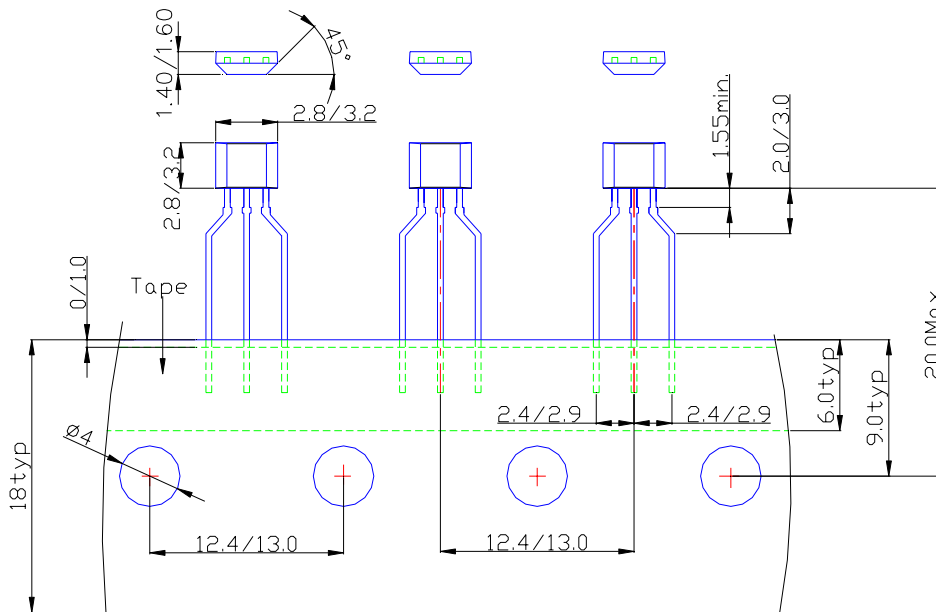

**Package Information (Continued)**

**(3) Package Type: SC59-3L**

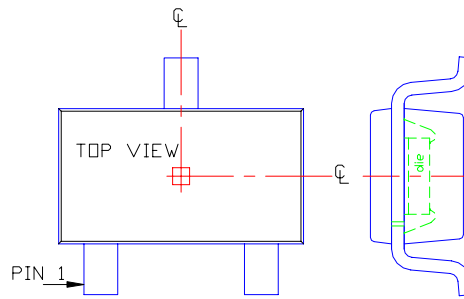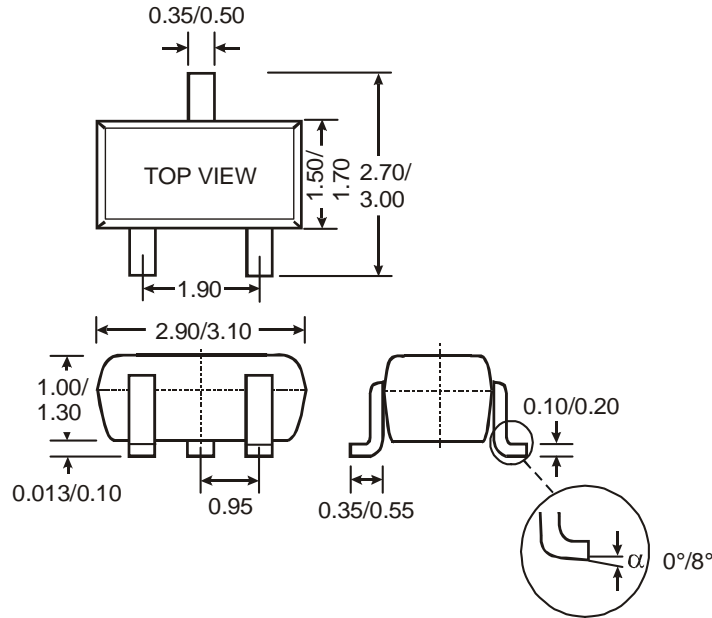

**Sensor Location**

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.