Stewart	Cor	ne	ctor
	////	////	,,,,

STANDARD 50 MICRO-INCH SELECTIVE GOLD PLATING

CT730113

Stewart Connector Systems, Inc. Insilco Technologies Group


11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 Fax: (717) 235-7954

REV.	REVISION CHANGES
X0	AS DRAWN
X1	ADDED DIMENSIONS
	<u> </u>

STEWART CONNECTOR SYSTEMS ("SCS") AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT

PRIOR WRITTEN CONSENT OF "SCS". THE SUBJECT MATTER

MAY BE PATENTED OR A PATENT MAY BE PENDING. © SCS

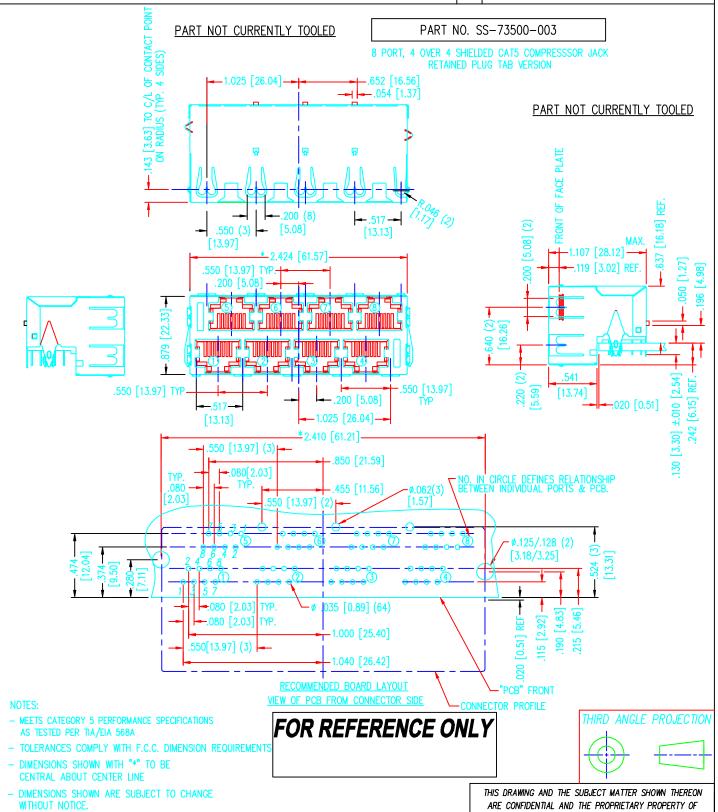

CONSULT FACTORY BEFORE ORDERING

SHT. 1 OF 2

Stewart	Co	nn	ec	tor
	///			///

Stewart Connector Systems, Inc. Insilco Technologies Group


11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 Fax: (717) 235-7954

REV.	REVISION CHANGES
X0	AS DRAWN
X1	ADDED DIMENSIONS


PART NOT CURRENTLY TOOLED

PART NO. SS-73500-003

PART NOT CURRENTLY TOOLED

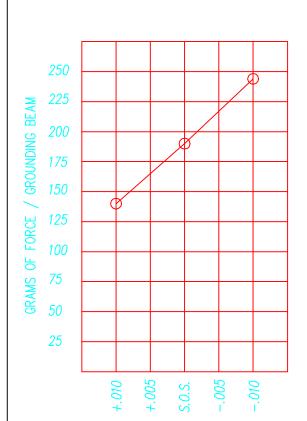


PANEL GROUNDING BEAM DEFLECTION S.O.S. = SUGGESTED OPENING SIZE A .010 PANEL OPENING CHANGE EFFECTS EACH GROUNDING BEAM BY .005.

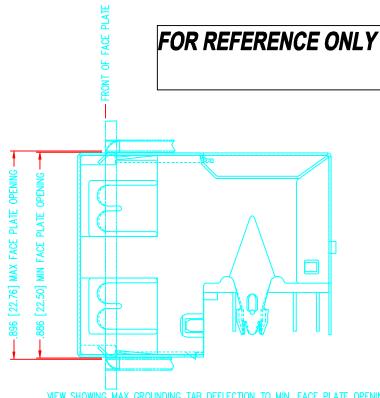

VIEW SHOWING MAX GROUNDING TAB DEFLECTION TO MIN. FACE PLATE OPENING

THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY. THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES. FORCE VALUES ON THE GRAPH ARE GENERAL AVERAGES TAKEN AT THE POINT OF CONTACT WITH FACE PLATE.

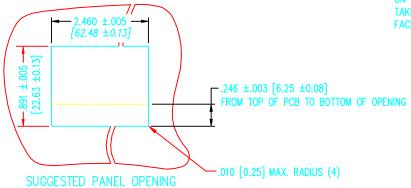

ANGLE PROJECTION

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR SYSTEMS ("SCS") AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF "SCS". THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING. © SCS

CT730113

SHT. 2 OF 2