


- Common Mode Choke for EMI Reduction
- Robust Construction to meet tough reflow process
- Rated Current : 500 mA
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μ H Min.)	Leakage Inductance (μ H Max.)	DCR (Ω Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	
35	.03	0.75

Schematic



Package

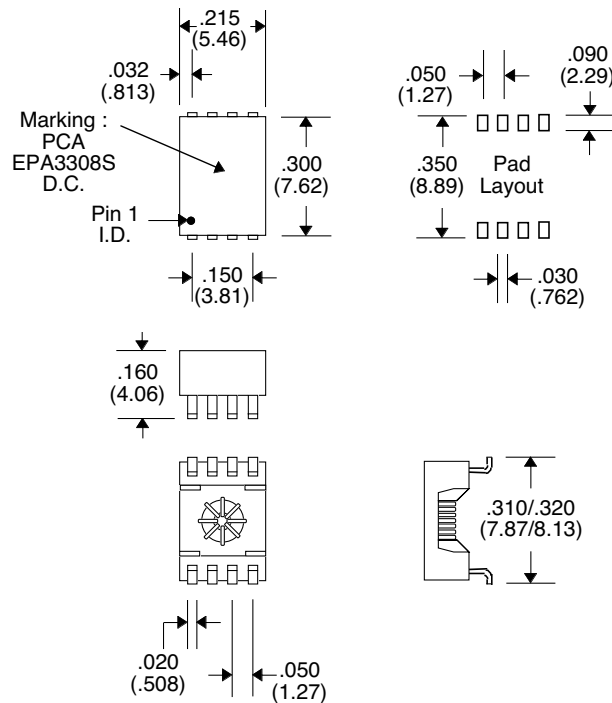

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$