

General Purpose GaAs FETs

Features


- ✕ High Gain
- ✕ 19 dBm Power Output
- ✕ Ion Implanted Material
- ✕ 70 Mil Hermetic Package

Applications

- ✕ Satellites
- ✕ Point-to-Point Radios
- ✕ Commercial Communications
- ✕ Defense Electronics

General Description

The CFA0101-G series is a family of high-gain FETs ideally suited for high performance gain block applications. This family of devices is assembled in an industry standard 70 mil hermetic package. This family of high reliability devices is ideally suited for operation-critical applications where reliability and performance are required.

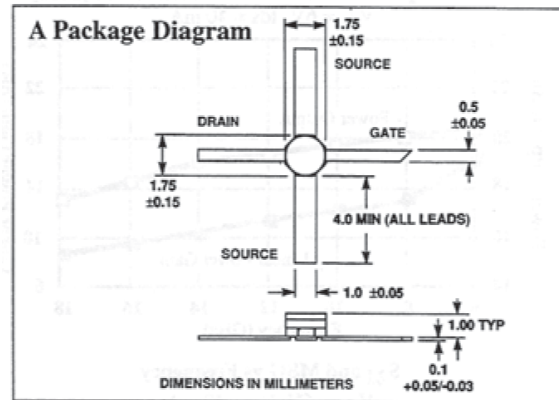

Typical Noise Parameters

(V_{ds}=6V, I_{ds}=40 mA)

Freq (GHz)	NF _{opt}	G _A (dB)	Gamma Opt		Rn/50
			Mag	Ang	
2.0	0.94	21.5	0.81	39	1.57
4.0	1.18	17.6	0.66	78	0.67
6.0	1.46	15.3	0.56	115	0.19
8.0	1.82	13.7	0.51	151	0.04
10.0	2.35	12.5	0.48	-175	0.14
12.0	2.87	11.6	0.48	-140	0.42
14.0	3.29	10.9	0.50	-105	0.78
16.0	3.70	10.3	0.51	-69	1.16
18.0	4.00	9.9	0.53	-32	1.46


Absolute Maximum Ratings

Drain-Source Voltage (V _{ds})	8 V
Gate-Source Voltage (V _{gs})	-5 V
Drain Current (I _{ds})	I _{dss}
Continuous Dissipation (Pt)	800 mW
RF Power In (P _{in})	+17 dBm
Channel Temperature (T _{ch})	175 °C
Storage Temperature (T _{stg})	-65 °C to +175 °C

Electrical Characteristics (Ambient Temperature T = 25 °C)

Parameter	Bias		Frequency (GHz)	Units	Grade	Min	Typ	Max
	V _{ds} (V)	I _{ds} (mA)						
P1dB	6.0	40.0	12.0	dBm	G1	19.0	19.5	-
					G2	18.0	18.5	-
					G3	17.0	17.5	-
GL	6.0	40.0	12.0	dB	G1	9.0	9.5	-
					G2	9.0	9.5	-
					G3	8.0	8.5	-
IS211 ²	6.0	40.0	2.0	dB	14.0			
			10.0		8.7			
			18.0		5.1			
NF _{opt}	6.0	40.0	12.0	dB	2.8			
gm	V _{ds} = 3.0V V _{gs} = 0V			mS	60.0			
I _{dss}	V _{ds} = 3.0V V _{gs} = 0V			mA	40.0	60.0	120.0	
V _p	V _{ds} = 3.0V I _{ds} = 1 mA			Volts	-0.7	-1.3	-2.5	
BV _{gd}	I _{gd} = 100 uA			Volts	-5.5	-8.0		
R _{th}				°C/W	250			

Typical Performance (TA = 25°C)

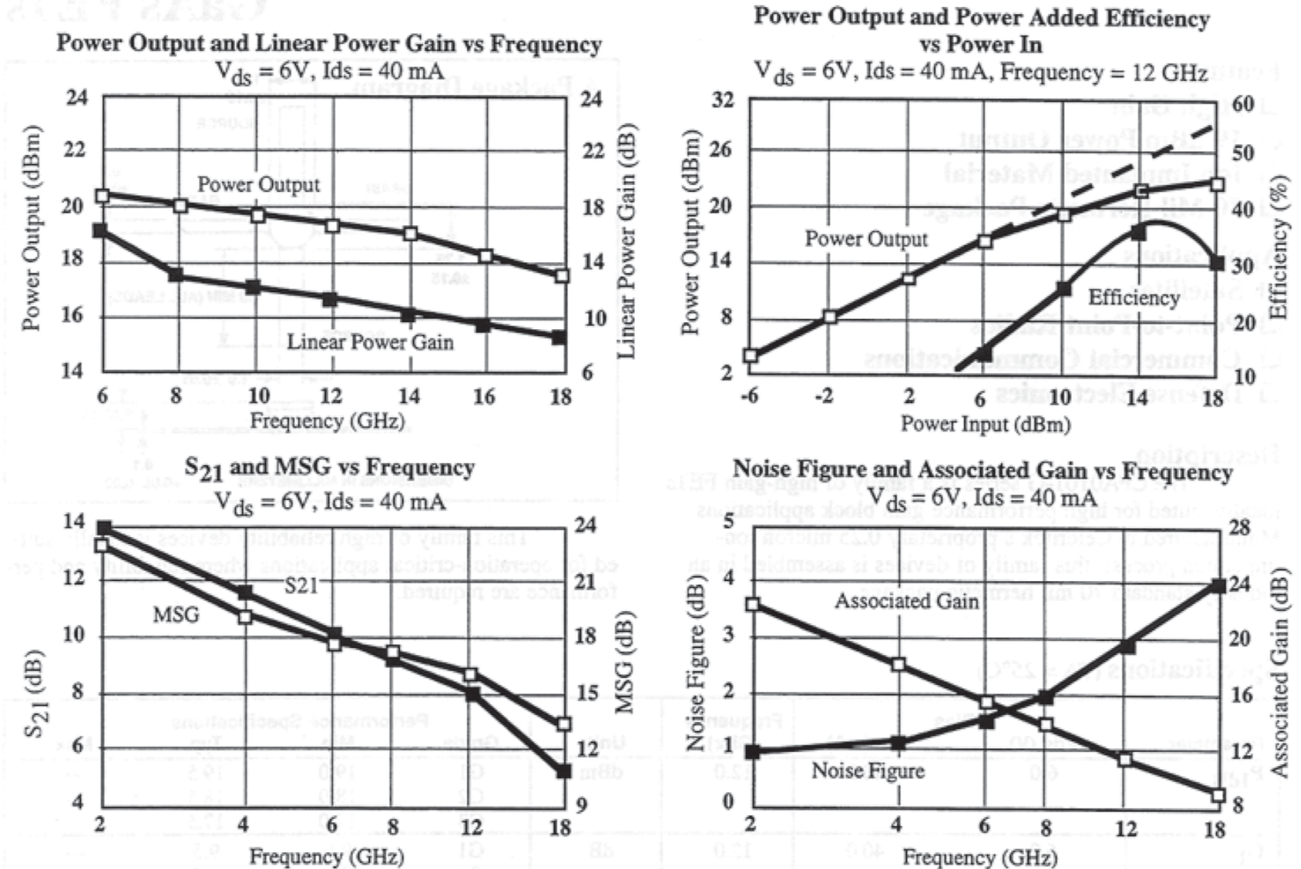

Typical Scattering Parameters (TA = 25°C, V_{ds} = 3V, I_{ds} = 15mA)

Frequency (GHz)	S11 (Mag) (Ang)	S21 (Mag) (Ang) (dB)	S12 (Mag) (Ang) (dB)	S22 (Mag) (Ang) (dB)	MSG (dB)
2.0	0.95 -37	5.01 145 14.0	0.02 59 -32.4	0.55 -17 23.2	
4.0	0.84 -80	3.94 106 11.9	0.04 40 -27.4	0.58 -45 19.7	
6.0	0.75 -114	3.31 75 10.4	0.05 26 -25.6	0.58 -64 18.0	
8.0	0.63 -157	3.13 44 9.9	0.06 12 -24.7	0.51 -76 17.3	
10.0	0.61 165	2.72 12 8.7	0.06 -3 -24.2	0.41 -113 16.5	
12.0	0.59 135	2.51 -16 8.0	0.07 -4 -23.4	0.50 -138 15.7	
14.0	0.60 94	2.26 -48 7.1	0.08 -20 -22.1	0.49 -167 14.6	
16.0	0.61 71	1.97 -79 5.9	0.09 -38 -21.4	0.62 157 13.7	
18.0	0.57 41	1.80 -111 5.1	0.08 -60 -21.7	0.68 139 13.4	